NOT MEASUREMENT SENSITIVE


MIL-B-41809/14G
13 September 1991
SUPERSEDING
MIL-B-41809/14F
14 September 1990

MILITARY SPECIFICATION SHEET


Badge, Identification, Instructor and Master Instructor
Air Force Training Command

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

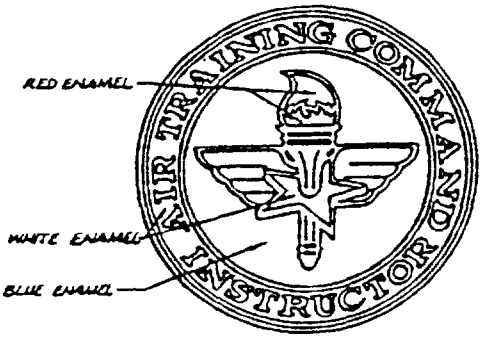

INSTRUCTOR

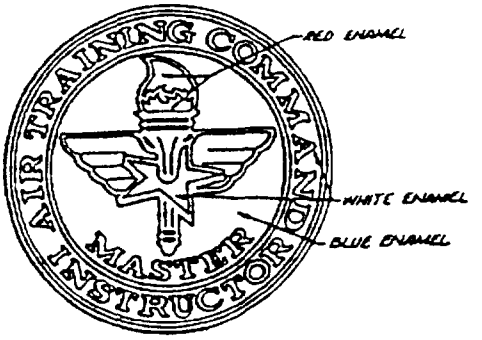

MASTER INSTRUCTOR

MATERIAL: Gilding metal

DIMENSIONS:
DIAMETER: 2 inches (5.08 cm) (REF)
THICKNESS (At thickest point): .080 inch ± .010 inch (0.203 cm ± 0.025 cm)

FINISH: Hard enameled, nickel plated, mirror-like polished

NOTES:
1. The attaching device shall be prong and clutch type. Three prongs shall be located on a 1-3/4 inch (4.45 cm) diameter circle. Each prong shall be 120 degrees apart with one prong located on the vertical centerline at the top of the badge.
2. The badge shall be spherically dapped 1/32 inch ± 1/64 inch (0.08 cm ± 0.04 cm) when measured on the reverse.
3. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Red	1
White	28

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:34Z
Check the source to verify that this is the current version before use.

4. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85 and incorporate an ultraviolet inhibitor.

Custodians:
Army - IH
Air Force - 11

Review activity:
Air Force - 82,99
DLA - CT

User activity:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-N620)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:34Z
Check the source to verify that this is the current version before use.