NOT MEASUREMENT SENSITIVE

MIL-B-41809/15H
14 September 1990
SUPERSEDING
MIL-B-41809/15G
14 May 1990


MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, FIRE PROTECTION, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.



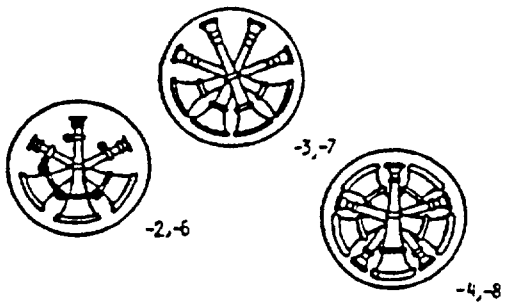

-1: Firefighter, Regular Size
-2: Assistant Fire Chief, Regular Size
-3: Deputy Fire Chief, Regular Size
-4: Fire Chief, Regular Size
-5: Firefighter, Miniature Size
-6: Assistant Fire Chief, Miniature Size
-7: Deputy Fire Chief, Miniature Size
-8: Fire Chief, Miniature Size

MATERIAL: Red brass

DIMENSIONS:

BASE:

HEIGHT (Overall):
-1,-2,-3,-4: 2-9/16 inch (6.51 cm) (REF)
-5,-6,-7,-8: 1-3/4 inch (4.45 cm) (REF)

WIDTH (Overall):
-1,-2,-3,-4: 1-5/8 inch (4.13 cm) (REF)
-5,-6,-7,-8: 1-3/16 inch (3.02 cm) (REF)

THICKNESS OF FORCED AREA (On lettering):
-1,-2,-3,-4: .080 inch ± .005 inch (0.203 cm ± 0.012 cm)
-5,-6,-7,-8: .070 inch ± .005 inch (0.177 cm ± 0.012 cm)

EDGE DEPTH (Bottom edge):
-1,-2,-3,-4: .120 inch ± .010 inch (0.304 cm ± 0.025 cm)
-5,-6,-7,-8: .085 inch ± .010 inch (0.215 cm ± 0.025 cm)

DEVICE:

DIAMETER:
-1,-2,-3,-4: 1 inch (2.54 cm) (REF)
-5,-6,-7,-8: 3/4 inch (1.91 cm) (REF)

THICKNESS (At center) (See note 6):
-1: .150 inch ± 0.010 inch (0.381 cm ± 0.025 cm)
-2,-3,-4,-5: .125 inch ± 0.010 inch (0.317 cm ± 0.025 cm)
-6,-7,-8: .110 inch ± 0.010 inch (0.279 cm ± 0.025 cm)

AMSC N/A
FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:35Z
Check the source to verify that this is the current version before use.

WEIGHT (Maximum):
-1,-2,-3,-4: 1-1/2 ounce.
-5,-6,-7,-8: 3/4 ounce.

FINISH:
BASE: Nickel plated, silver plated, oxidized, relieved, matte finish
DEVICE:
-1,-5: Nickel plated, silver plated, oxidized, relieved, matte finish
-2,-3,-4,-6,-7,-8: Gold plated, matte finish, highlighted

NOTES:
1. The design of Dash No. 2, 3, 4, 6, 7 and 8 are identical to the design shown except for the center device.
2. A mock forcer shall be used to bring up the design of the base, eagle and lettering areas. A mock forcer may be used to bring up the design of the device.
3. The device for Dash No. 2, 3, 4, 6, 7 and 8 shall be secured to the base by two hollow or solid rivets. The rivets shall be located on the horizontal centerline, equidistance from each end and 3/4 inch (1.91 cm) apart for regular size and 3/8 inch (0.95 cm) apart for the miniature size. Dash No. 1 and 5 may be soft soldered or riveted.
4. The attaching device for regular size badges (Dash No. 1, 2, 3 and 4) shall be a heavy duty pin and side opening catch type. The pin stem shall be 1-3/4 inches $\pm$ 1/32 inch (4.45 cm $\pm$ 0.08 cm) long. The joint and catch shall be attached on the vertical centerline and equidistance from each end. The joint and catch shall be positioned on the same level plane to each (platform areas on the reverse side may be used for leveling the joint and catch).
5. The attaching device for miniature size badges (dash No. 5, 6, 7 and 8) shall be prong and clutch type. One prong shall be located on the vertical centerline behind the eagles breast. Two prongs shall be on a horizontal line located 1/2 inch $\pm$ 1/32 inch (1.27 cm $\pm$ 0.08 cm) above the base, equidistance from each end and 3/4 inch $\pm$ 1/32 inch (1.91 cm $\pm$ 0.08 cm) apart.
6. The overall device thickness shall include the depth of the forced area when a forcer is used.
7. The badge may nickel or rhodium plated with a mirror-like polished finish when specified in the procurement document except the silver plating requirement shall not apply.

Custodians:
Army - IH
Air Force - 99

Review activities:
Air Force - 11,82
DLA - CT

User activity:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0539)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:35Z
Check the source to verify that this is the current version before use.