NOT MEASUREMENT SENSITIVE


MIL-B-41809/2F
10 February 1992
SUPERSEDING
MIL-B-41809/2E
29 November 1991

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, JOINT CHIEFS OF STAFF

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

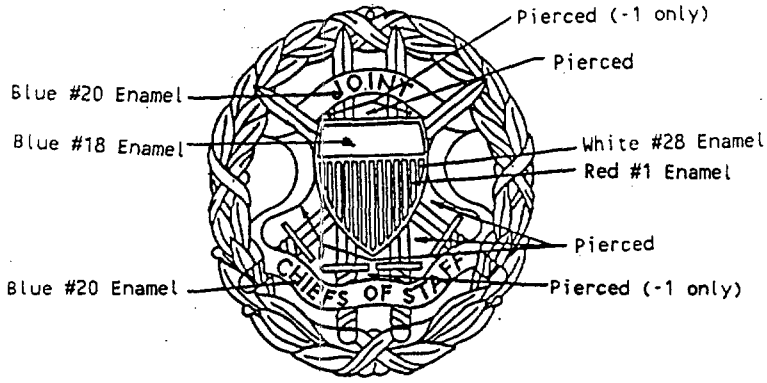

MATERIAL:
WREATH: Red brass or gilding metal
DEVICE: Gilding metal

DASH NO:
-1: Regular size
-2: Miniature size

DIMENSIONS:

		WREATH	DEVICE
HEIGHT (Overall):			
	-1:	2-1/4 inch (5.72 cm)	1-15/16 inch (4.92 cm) (REF)
	-2:	1-1/2 inch (3.81 cm)	1-3/8 inch (3.49 cm) (REF)
WIDTH (Overall):			
	-1:	2 inches (5.08 cm) (REF)	1-5/8 inch (4.13 cm) (REF)
	-2:	1-3/8 inch (3.49 cm) (REF)	1-1/8 inch (2.86 cm) (REF)
THICKNESS (At thickest point):			
	-1:	.095 inch ± .010 inch (0.241 cm ± 0.025 cm)	.110 inch ± .010 inch (0.279 cm ± 0.025 cm)
	-2:	.075 inch ± .010 inch (0.190 cm ± 0.025 cm)	.085 inch ± .010 inch (0.215 cm ± 0.025 cm)

AMSC N/A
FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:31Z
Check the source to verify that this is the current version before use.

FINISH:
WREATH: Nickel plated, silver plated, oxidized, relieved, matte finish
DEVICE: Hard enameled, light rose gold plated, matte finish

NOTES:
1. The attaching device shall be prong and clutch type. Three prongs shall be centered on the wreath. One prong shall be at the top of the badge and located on the vertical centerline. Two prongs shall be located on a horizontal line 7/16 inch + 0, - 1/16 inch (1.11 cm + 0, - 0.16 cm) from the lowest outside edge for Dash No. 1 and 11/32 inch + 0, - 1/32 inch (0.87 cm + 0, - 0.08 cm) from the lowest outside edge for Dash No. 2.
2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Blue	18
Blue	20
Red	1
White	28

3. The incised letters shall be filled with blue air dried enamel. The blue enamel color shall match TIOH chip number 20 or the standard sample.
4. The device shall be superimposed and secured to the wreath by four rivets or soft solder. When rivets are used, they shall be located at the ends of the diagonal swords and shall be either soldered to or be an integral part of the sword.
5. The design of the Dash No. 1 and 2 are identical with the exception of the shield on the device. The Dash No. 1 shield (shown) has 13 stripes and the shield for Dash No. 2 has 9 stripes. The stripes of both shields shall be enameled with alternating white and red; beginning with white and ending with white.
6. Epoxy resin may be used in lieu of hard enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor. When epoxy resin is used, rivets shall be used to attach the device to the wreath.
7. The following finish is permitted for commercial sale or when specified in the procurement document:
   WREATH: Nickel plated, mirror-like polished.
   DEVICE: Gold plated, mirror-like polished.
8. Piercing shall be as indicated.

Custodian:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 82,99
Navy - MC
DLA - CT

(Project No. 8455-0644)

User activities:
Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:31Z
Check the source to verify that this is the current version before use.