NOT MEASUREMENT SENSITIVE


MIL-B-41809/4G
14 September 1990
SUPERSEDING
MIL-B-41809/4F
14 May 1990

MILITARY SPECIFICATION SHEET


BADGE, IDENTIFICATION AND INSIGNIA, SERVICE CAP, CIVILIAN POLICE AND CIVILIAN GUARD, DOD

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

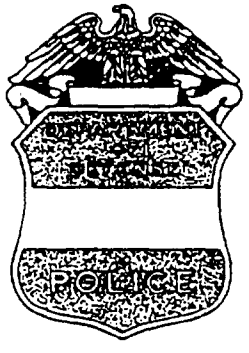

-1,-2,-3,-4

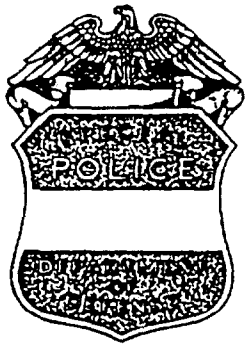

-5,-6

-1: Identification (Non-Supervisory)
-2: Service Cap (Non-Supervisory)
-3: Identification (Supervisory)
-4: Service Cap (Supervisory)
-5: Identification (Civilian Guard)
-6: Service Cap (Civilian Guard)

MATERIAL:
-1,-2,-5,-6: Red brass or nickel silver
-3,-4: Red brass

DIMENSIONS:
HEIGHT (Overall): 2-7/16 inches (6.19 cm) (REF)
WIDTH (Overall): 1-5/8 inches (4.13 cm) (REF)
THICKNESS (Lowest edge): .065 inch ± .005 inch (0.165 cm ± 0.012 cm)

FINISH:
-1,-2,-5,-6: Nickel plated. Lettering, rim, band of shield and scroll mirror-like polished. Background of shield and area behind eagle and scroll pebbled, matte finish. Eagle highlighted.

-3,-4: Gold plated. Lettering, rim, band of shield and scroll mirror-like polished. Background of shield and area behind eagle and scroll pebbled, matte finish. Eagle highlighted.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. The attaching device for Dash No. 1, 3 and 5 shall be a coil pin type with heavy duty top opening catch. The pin stem shall be 1-3/4 inches ± 1/64 inch (4.45 cm ± 0.04 cm) long. The pin and catch shall be hard soldered or fused on the vertical centerline with the joint located 11/16 inch ± 1/64 inch (1.75 cm ± 0.04 cm) down from the top of the badge.
2. The attaching device for Dash No. 2, 4 and 6 shall be a screw post and thumb nut with one registering prong. The screw post shall be hard soldered or fused on the vertical centerline 1 inch ± 1/32 inch (2.54 cm ± 0.04 cm) from the top of the badge. The registration prong shall be located on the vetical centerline 1/4 inch ± 1/32 inch (0.64 cm ± 0.08 cm) from the top of the badge.
   a. The screw post shall be 1/2 inch ± 1/32 inch (1.27 cm ± 0.08 cm) long and 1/8 inch ± .010 inch (0.32 cm ± 0.025 cm) in diameter and shall have a No 5-4 OUNC-2A thread.
   b. The thumb nut shall be 5/8 inch ± .010 inch (1.59 cm ± 0.025 cm) in diameter and shall have a No. 5-4 OUNC-2B thread.
   c. The registration prong shall be 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) in length and .045 inch ± .002 (0.114 cm ± 0.005 cm) in diameter.
3. A mock forcer may be used to bring up the area of the shield.
4. Dash No. 1, 2, 5 and 6 may be rhodium plated, lettering, rim, band of shield and scroll mirror-like polished.

Custodians:
Army - IH
Air Force - 99

Review activities:
Air Force - 82
Navy - NU
DLA - CT

User activity:
Air Force - 45

Preparing activity:
Army - IH

(Project No. 8455-0539)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.