
NOT MEASUREMENT SENSITIVE
MIL-B-41809/5C
7 September 1989
SUPERSEDING
MIL-B-41809/5B
31 December 1978

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, ARMY STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

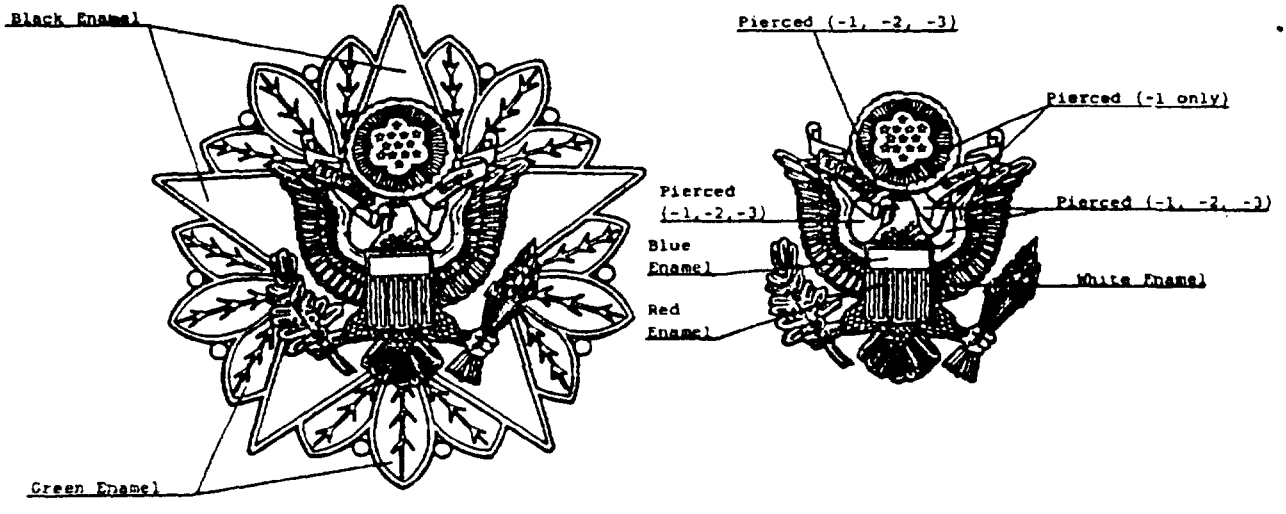

MATERIAL: Gilding Metal

DIMENSIONS INCHES (METRIC):

STAR:
CIRCUMSCRIBED DIAMETER:
-1: 3 inches (7.62 cm) (REF)
-2: 2 inches (5.09 cm) (REF)
-3: 1 1/2 inch (3.81 cm) (REF)
THICKNESS: .060 inch (0.152 cm) (REF)

DEVICE:
HEIGHT (Overall):
-1: 1-5/8 inch (4.13 cm) (REF)
-2: 1-1/16 inch (2.7 cm) (REF)
-3: 13/16 inch (2.06 cm) (REF)
THICKNESS: .050 inch (0.127 cm) (REF)

ASSEMBLED THICKNESS: (Chief of Shield): .110 inch (0.279 cm) ± .005 inch (0.012 cm)

DASH NO.
-1: Chief of Staff
-2: General Staff, Regular
-3: General Staff, Miniature

FINISH: ENAMELED, GOLD PLATED, MIRROR-LIKE POLISHED, REVERSE GOLD PLATED, BRIGHT AND CLEAN.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dash No. 1 shall be spherically dapped to a radius of 2-1/2 inches (6.35 cm) + 1/4 inch (0.64 cm), - 0 inch (cm) when measured on the reverse. Dash No. 2 shall be spherically dapped to a radius of 2 inches (5.09 cm), ± 1/8 inch (0.32 cm) when measured on the reverse. Dash No. 3 shall be spherically dapped to a radius of 1-1/2 inch ± 1/16 inch (0.16 cm) when measured on the reverse.
2. The device shall be secured to the background by two solid brass rivets and shall be dapped to insure a snug fit. The device shall be pierced as shown.
3. Enameled areas shall be as indicated and shall match the applicable TIOH color chips listed below:

COLOR	CHIP NO.
Red	#1
Green	#11
Blue	#20
Black	#26
White	#28

4. Epoxy resin may be used in lieu of vitreous enamel. The epoxy resin shall be a stoning epoxy and have a minimum shore "D" hardness of 85 and incorporate an ultra violate inhibitor.
5. The shield for Dash No. 1 and 2 has 13 stripes. The shield for Dash No. 3 has 7 stripes. The stripes of both shields shall be enameled with alternating white and red; beginning with white and ending with white.
6. The attaching device shall be 3 prongs and clutches. The prongs shall be located 3/16 inch (0.48 cm) ± 1/32 inch (0.08 cm) in from the edge of the badge. One prong shall be at the top and centered on the vertical center line and the other prongs shall be located on either side of the badge on the first leaf below the horizontal center line.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA-CT

(Project No. 8455-A427)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
The Institute of Heraldry, US Army
Cameron Station, 5010 Duke Street
Alexandria, Virginia 22304-5050

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Director
The Institute of Heraldry, US Army
ATTN: DAPC-PDH-T
Cameron Station, 5010 Duke Street
Alexandria, Virginia 22304-5050

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITIONS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.