NOT MEASUREMENT SENSITIVE


MIL-B-41809/5D
30 April 1992
SUPERSEDING
MIL-B-41809/5C
7 September 1989

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION, ARMY STAFF, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

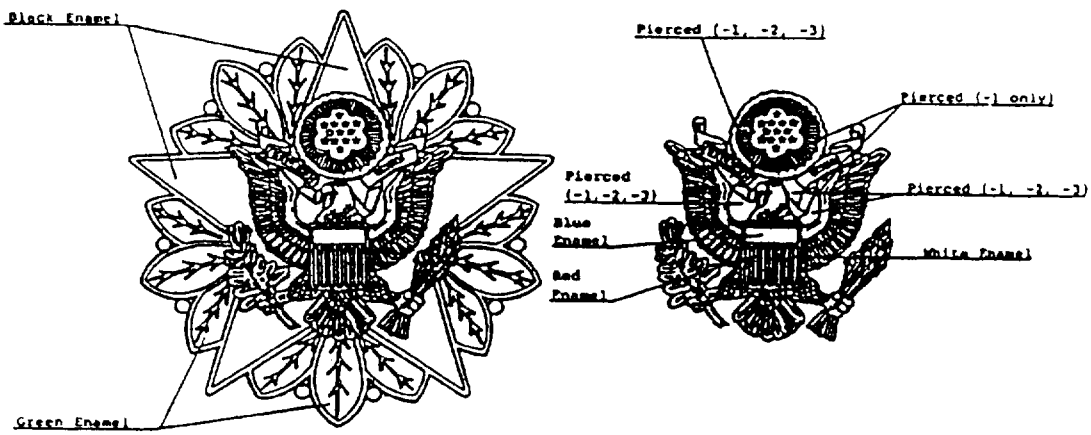

MATERIAL: Gilding Medal

DIMENSIONS:
- STAR:
  - CIRCUMSCRIBED DIAMETER:
    - -1: 3 inches (7.62 cm) (REF)
    - -2: 2 inches (5.09 cm) (REF)
    - -3: 1-1/2 inch (3.81 cm) (REF)
  - THICKNESS: 0.060 inch (0.152 cm) (REF)
- DEVICE:
  - HEIGHT (Overall):
    - -1: 1-5/8 inches (4.13 cm) (REF)
    - -2: 1-1/16 inches (2.7 cm) (REF)
    - -3: 13/16 inch (2.06 cm) (REF)
  - THICKNESS: 0.050 inch (0.127 cm) (REF)

DASH NO:
- -1: Chief of Staff
- -2: Army Staff, Regular Size
- -3: Army Staff, Miniature Size

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.

ASSEMBLED THICKNESS (Chief of Shield): 0.110 inch ± 0.005 inch (0.279 cm ± 0.012 cm)

FINISH: Enameled, Gold Plated, Mirror-like polished; Reverse - Gold Plated, Bright and Clean

NOTES:

1. Dash No. 1 shall be spherically dapped to a radius of 2-1/2 inches + 1/4 inch - 0 inch (6.35 cm + 0.64 cm - 0 cm) when measured on the reverse. Dash No. 2 shall be spherically dapped to a radius of 2 inches ± 1/8 inch (5.09 cm ± 0.32 cm) when measured on the reverse. Dash No. 3 shall be spherically dapped to a radius of 1-1/2 inch ± 1/16 inch (3.81 cm ± 0.16 cm) when measured on the reverse.

2. The device shall be secured to the background by two solid brass rivets and shall be dapped to insure a snug fit. The device shall be pierced as shown.

3. Enameled areas shall be as indicated. The color shall conform to the applicable TIOH color chips listed below or the standard sample:

COLOR	CHIP NO.
Red	1
Green	11
Blue	20
Black	26
White	28

4. Epoxy resin may be used in lieu of vitreous enamel at the option of the manufacturer. The epoxy resin shall be a stoning epoxy, have a shore D hardness of no less than 85 and incorporate an ultraviolet inhibitor.

5. The shield for Dash No. 1 and 2 has 13 stripes. The shield for Dash No. 3 has 7 stripes. The stripes of both shields shall be enameled with alternating white and red; beginning with white and ending with white.

6. The attaching device shall be three prongs and clutches. The prongs shall be located 3/16 inch ± 1/32 inch (0.48 cm ± 0.08 cm) in from the edge of the badge. One prong shall be at the top and centered on the vertical center line and the other prongs shall be located on either side of the badge on the first leaf below the horizontal center line.

7. The term (REF) refers to the measurements taken from the Government furnished hub or die.

8. As an alternate method of manufacturing for commercial sale only, 22 karat gold plate with nickel underplating may be used.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-( )

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.