
MIL-B-41809 / 6E
4 June 1987
SUPERSEDING
MIL-B-41809 / 6D
24 October 1985

MILITARY SPECIFICATION SHEET

BADGE, IDENTIFICATION; OFFICE OF THE SECRETARY OF DEFENSE

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-41809.

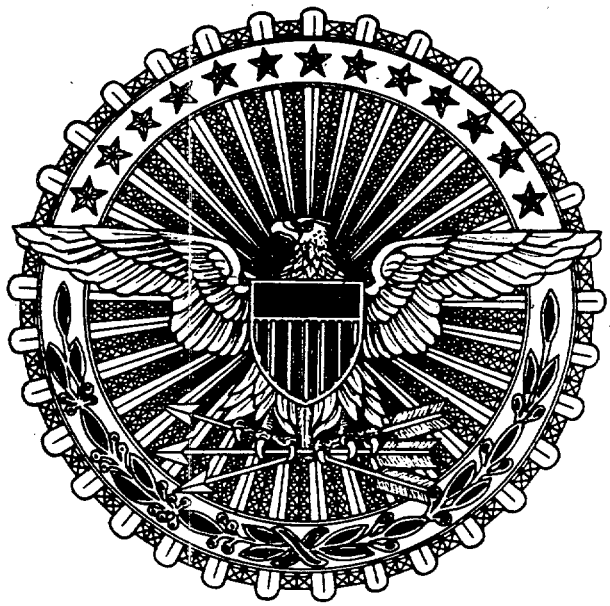

MATERIAL:
- BASE: RED BRASS
- DEVICE: GILDING METAL

DIMENSIONS (INCHES):
- DIAMETER (INCHES):
  - -1: 2 (REF)
  - -2: 1-1/2 (REF)
- THICKNESS:
  - BASE (EDGE):
    - -1: .065 ± .010
    - -2: .055 ± .010
  - DEVICE (WING TIPS):
    - -1: .060 ± .010
    - -2: .055 ± .010
  - OVERALL:
    - -1: .110 ± .010
    - -2: .100 ± .010

FINISH:
- BASE:
  - OBVERSE: NICKEL PLATED, SILVER PLATED, OXIDIZED, RELIEVED, SATIN FINISH
  - REVERSE: CLEAN
- DEVICE: ENAMELED, GOLD PLATED, SATIN FINISH WITH STARS AND HIGHLIGHTS POLISHED

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. A MOCK FORCER MAY BE USED TO BRING UP THE SHIELD AND RIDGELINE OF WINGS.

2. ATTACHING DEVICE FOR -1 AND -2 SHALL BE THREE PRONGS WITH CLUTCHES. THE PRONGS FOR -1 SHALL BE 3/8 ± 1/64 INCH LONG AND .045 ± .002 INCH IN DIAMETER. THE PRONGS SHALL BE SOLDERED OR FUSED, TO THE REVERSE OF THE BASE, ONE PRONG SHALL BE LOCATED AT THE INTERSECTION OF THE VERTICAL CENTERLINE IN A CIRCLE 1-5/8 INCH IN DIAMETER. THE REMAINING PRONGS LOCATED 120 DEGREES APART. THE PRONGS FOR -2 SHALL BE 3/8 ± 1/64 INCH LONG AND .045 ± .002 INCH IN DIAMETER. THE PRONGS SHALL BE SOLDERED OR FUSED TO THE REVERSE OF THE BASE, ONE PRONG SHALL BE LOCATED AT THE INTERSECTION OF THE VERTICAL CENTERLINE IN A CIRCLE 1-1/8 INCH IN DIAMETER. THE REMAINING PRONGS LOCATED 120 DEGREES APART.

3. DEVICE FOR -1 AND -2 SHALL BE ATTACHED TO THE BASE BY MEANS OF A SCREWPOST AND A TYPE A PLATE WITHOUT PRONGS. THE SCREWPOST SHALL BE .140 ± .005 INCH LONG. THE POST SHALL BE HARD SOLDERED OR FUSED TO THE DEVICE IN A LOCATION TO CORRECTLY POSITION THE DEVICE ON THE BASE. THE BASE SHALL HAVE A .130 ± .003 SQUARE HOLE CUT THROUGH AND CENTERED ON THE BASE.

4. THE ENAMEL COLORS SHALL CONFORM TO THE TIOH COLOR CHIPS LISTED BELOW AND SHALL MATCH THE ENAMEL COLORS ON THE STANDARD OR APPROVED SAMPLES: GREEN 12, RED 1, WHITE 28 AND BLUE 18.

5. THE BASE SHALL BE LACQUERED PRIOR TO ASSEMBLY. THE DEVICE MAY BE LACQUERED AT THE DISCRETION OF THE MANUFACTURER.

6. THE AREA AROUND THE EAGLE'S HEAD AND INSIDE THE ARROWS SHALL BE PIERCED FOR -1 AND -2.

7. DUE TO SIZE RESTRICTIONS THE DESIGN OF -2 IS NOT IDENTICAL TO -1. -1 HAS 13 STARS ON THE RING AND 13 STRIPES IN THE SHIELD. -2 HAS 13 STARS ON THE RING AND 9 STRIPES IN THE SHIELD.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Review activities:
Air Force - 82,99
Navy - MC
DLA - CT

User activities:
Air Force - 45
Navy - CG

Preparing activity:
Army - IH

(Project No. 8455 - 0292)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:32Z
Check the source to verify that this is the current version before use.