NOT MEASUREMENT SENSITIVE

MIL-B-41809/9E
14 May 1990
SUPERSEDING
MIL-B-41809/9D
31 December 1978

MILITARY SPECIFICATION SHEET

# BADGE, IDENTIFICATION, DRILL SERGEANT, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-41809.

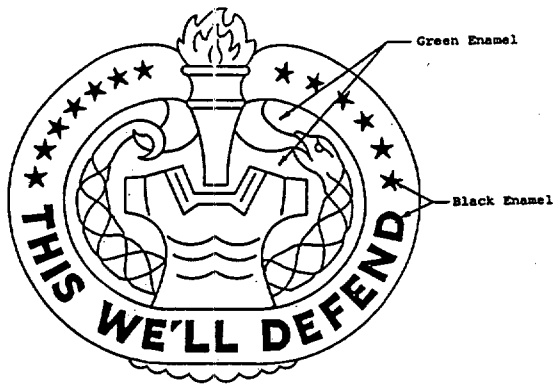


MATERIAL: Red brass

DIMENSIONS:
HEIGHT (Overall): 1-51/64 inch (4.56 cm) (REF)
WIDTH (Overall): 2 inches (5.08 cm) (REF)
THICKNESS (At thickest point): .110 inch ± .005 inch (0.279 cm) ± (0.012 cm)

FINISH: Soft baked enameled, gold plated, scroll brightly polished. Interior, ends of scroll and modeled areas matte finish.

NOTES:
1. Attaching device shall be prong and clutch type. One prong shall be located on the vertical center line 1/4 inch ± 1/32 inch (0.64 cm) ± (0.08 cm) below the highest tip of the flame. One prong shall be located on a horizontal line 7/16 inch ± 1/32 inch (1.11 cm) ± (0.08 cm) from each outside edge of the badge.
2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

| COLOR | CHIP NUMBER |
|---|---|
| Black | 26 |
| Green | 12 |

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0486)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:33Z
Check the source to verify that this is the current version before use.