12 May 1976
SUPERSEDING
MIL-C-40643A
24 May 1968

MILITARY SPECIFICATION

CLIPS, FASTENER, CONTAINER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers metal clips for fastening materials to fiberboard boxes.

1.2 Classification.

1.2.1 Types. The clips shall be of the following types as specified (see 6.2):

Type I	-	Flat, Rectangular
Type II	-	Flat, Rectangular (Four Corners Right-Angle-Turned)
Type III	-	Flat-Squared (Four Corners Snipped) W/Screw-Type Nail (Swaged-On Assembly)

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	-	Boxes, Shipping, Fiberboard

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-L-10547 - Liners, Case and Sheet Overwrap; Water-Vaporproof or Waterproof, Flexible

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWING

ARMY NATICK RESEARCH & DEVELOPMENT COMMAND

4-1-230 - Clips, Fastener, Container; Details, Type I, II and III

(Miniature copy of Drawing 4-1-230, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, and drawing required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Material.

* 3.1.1 Steel, sheet or strip. The steel sheet or strip thickness shall be 0.0299 ± 0.003 inch, any composition C1008 through C1020, commercial quality, cold rolled, half-hard temper, No. 2 finish of QQ-S-698.

* 3.2 Design and construction. The design and construction of the container fastener clips shall conform to the requirements specified hereinafter, and the details and dimensions shown on Drawing 4-1-230.

3.3 Finish. The completed container fastener clips shall have a natural finish in accordance with industry practice and be free of rust or loose scale.

3.4 Workmanship. The completed clips shall be free from breaks, cracks, burrs, slivers, rough or sharp edges or malformations.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, standards and drawings unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.2.2 End item inspection. The inspection lot shall consist of all container fastener clips of one type offered for inspection at one time. The sample unit shall be one completely fabricated container fastener clip.

4.2.2.1 Visual examination. The clips shall be examined for the defects classified in table I. The inspection level shall be II with an acceptable quality level (AQL) of 4.0 expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect
Finish	Not natural finish Not free of rust or loose scale
Workmanship	Not free of breaks, cracks, nicks, burrs, slivers, rough or sharp edges, pits, die marks or malformations

4.2.2.2 Dimensional examination. Inspection shall be made of the fastener clips for compliance with dimensions specified. Any deviation from specified requirements shall be classified a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

* 4.2.3 Inspection of packaging requirements. An examination shall be made to determine that preservation-packaging, packing and marking comply with the section 5 requirements. Defects shall be as listed in table II. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Examination for closure defects shall be made on containers fully prepared for delivery. The lot shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

TABLE II. Examination of packaging

Examine	Defect
Marking (interior or exterior)	Missing; incorrect; illegible; of improper size, location, sequence or method of application
Materials	Any component missing or damaged, defective, or not as specified
Workmanship	Bulged or distorted containers
Contents	More or less than required

* 4.2.3.1 Inspection of interior boxes. When interior boxes are required to comply with PPP-B-636, examination for defects in the closure shall be in accordance with the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

* 4.2.3.2 Inspection of shipping containers. When shipping containers are required to comply with PPP-B-601, PPP-B-621 or PPP-B-636, examination for defects in the closure, waterproofing (when applicable) and reinforcing shall be in accordance with the appendix of the applicable container specification.

5. PACKAGING

* 5.1 Preservation-packaging. Preservation-packaging shall be level A or C, as specified (see 6.2).

* 5.1.1 Level A. Five hundred (500) clips of one type only shall be preserved-packaged in a snug fitting fiberboard box conforming to RSC or CSSC, type CF, (Variety SW) or SF, class domestic, grade 200 of PPP-B-636. Each box shall be securely closed in accordance with the appendix of PPP-B-636.

* 5.1.2 Level C. Clips shall be preserved-packaged to afford adequate protection against physical damage during shipment from the supplier to the first receiving activity. The package and the quantity per package shall be the same as that used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A packing. Two thousand clips of one type only, preserved-packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style FTC, grade V2s of PPP-B-636; overseas type, style A or J, grade A or B, type 2 load of PPP-B-601; or class 2, style 2 or 4, grade A or B, type 2 load of PPP-B-621. Each fiberboard container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636. Each wood container shall be waterproofed with a sealed case liner conforming to type I or II, grade C of MIL-L-10547 and be closed and reinforced in accordance with the appendix of the applicable container specification.

5.2.2 Level B packing. Two thousand (2,000) clips of one type only packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard box conforming to style FTC or RSC, or type CF or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be securely closed in accordance with the appendix of PPP-B-636.

5.2.2.1 Weather-resistant fiberboard containers. When specified, (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

5.2.3 Level C packing. Clips, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally by the supplier for retail distribution. Containers shall comply with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The container fastener clips covered by this specification are intended to fasten materials to fiberboard, folding, set-up and self-locking boxes (nail or bolt-type).

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Type required (see 1.2.1).
(c) Selection of applicable level of preservation-packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evalute the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 69

Review activities:

Air Force - 11, 80
DSA - GS

User activities:

Navy - MC
Air Force - 71

Preparing activity:

Army - GL

Project No. 8135-0457

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

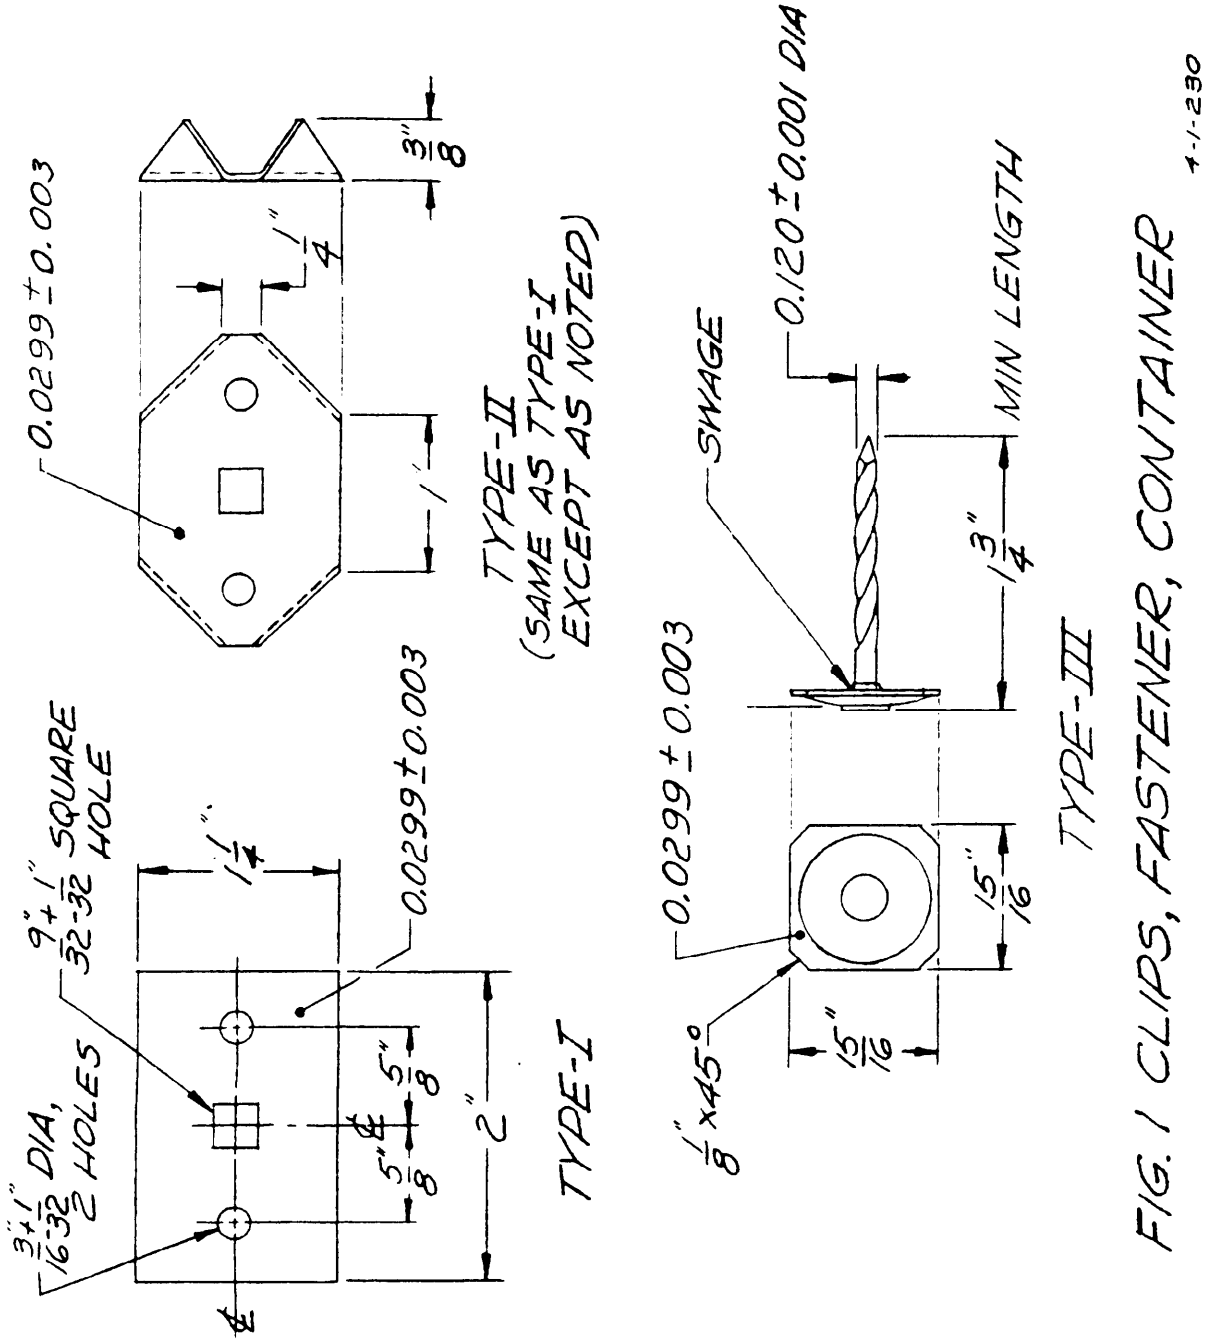


FIG. 1 CLIPS, FASTENER, CONTAINER

4-1-230

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-C-40643B - CLIPS, FASTENER, CONTAINER

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY Research & Development
US ARMY NATICK ~~DEVELOPMENT CENTER~~ Command

NATICK, MA 01760
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

DRXNM--TDG

Commander Research and
US Army Natick Development Command
ATTN: DRXNM-TDG
Natick, MA 01760

NATICK OP 1 MAY 75
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.