MIL-N-41804E
20 August 1987
SUPERSEDING
MIL-N-41804D
3 March 1983

MILITARY SPECIFICATION

NECKTIES, MEN'S, FOUR-IN-HAND

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers the requirements for polyester/wool neckties.

1.2 Classification. The neckties shall be of one type in the following classes (see 6.2):

Class 3 - Khaki 2122 (Marine Corps)
Class 4 - Blue 1083 (Air Force and Coast Guard)
Class 5 - Black 439 (Army and Navy)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-203 - Paper, Kraft, Untreated
V-T-276 - Thread, Cotton

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8440

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2020-10-21 19:36Z
Check the source to verify that this is the current version before use.

V-T-285	-	Thread, Polyester
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-T-2283	-	Tape, Textile, Nylon, Woven, White or Dyed
MIL-T-5038	-	Tape, Textile and Webbing, Textile Reinforcing, Nylon
MIL-C-21115	-	Cloth, Tropical: Wool, Polyester/Wool
MIL-C-29404	-	Cloth, Tropical, Polyester and Wool
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage, General Specification For
MIL-T-43548	-	Thread, Polyester Core: Cotton-, Rayon-, or Polyester-Covered

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issues of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which are current on the date of the solicitation.

COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America

(Application for copies should be addressed to the Textile Color Association of the United States, Inc., 343 Lexington Ave., New York, NY 10016.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187).

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this document may appear in the sample, in which case this document shall govern.

3.2 Material (see 6.4).

3.2.1 Basic material. The basic material for class 3 neckties shall be polyester and wool tropical washable cloth conforming to MIL-C-29404. The basic material for classes 4 and 5 shall be polyester-wool blend cloth conforming to type III, class 2, of MIL-C-21115, or a tropical type fabric, conforming to the following requirements when tested as specified in 4.2.1.1.

Weave	- plain
Yarn ply	- 2 warp, 2 filling
Weight (oz/linear yd, 60" basis min)	- 8.5
Yarns per inch (min)	- 56 warp, 46 filling
Breaking strength (lbs) (min)	- 120 warp, 110 filling
Shrinkage (%) (max)	- 2 warp, 2 filling
Fiber content	- 68 percent polyester, 25 percent acrylic, 7 percent mohair

The finished cloth shall show fastness to light, laundering, perspiration, crocking and wet-dry cleaning equal to or better than the standard sample. When no standard sample is available, the finished cloth shall show good fastness to light, laundering, perspiration, crocking and wet-dry cleaning.

3.2.1.1 Color, cloth.

3.2.1.1.1 Class 3. The color for class 3 neckties shall be Khaki 2122.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

3.2.1.1.2 Class 4. The color for class 4 neckties shall be Blue 1083, obtained by piece or stock dyeing.

3.2.1.1.3 Class 5. The color for class 5 neckties shall be Black 439.

3.2.2 Interlining. The interlining for the neckties shall be crease resistant polyester/acrylic/wool cloth, natural in color, conforming to the following requirements when tested as specified in 4.2.1.1:

Weave	- plain
Weight	- 6.0 ounces (minimum) per square yard
Yarns per inch	- warp 26 (min); filling 26 (min)
Crease resistance	- warp and filling 78 percent (min)
Fiber content	- 10 percent (min) wool, 50 ± 5 percent polyester, with remaining percentage acrylic
Fiber content (alternate)	- 70 ± 5 percent polyester, 5 percent (min) wool, remaining percentage acrylic

3.2.3 Thread. The thread for all neckties shall be cotton, type IC2, ticket No. A conforming to V-T-276. Cotton-covered polyester thread, ticket No. 50, 2 ply or 3 ply, conforming to MIL-T-43548 may be substituted for the cotton thread. When the alternate method of interlining fabrication is used the thread shall be polyester, type 1, class 1, sub-class B, size E conforming to V-T-285.

3.2.3.1 Color, thread.

3.2.3.1.1 Class 3. The thread for class 3 neckties shall be Khaki P-1, C.A. 66019.

3.2.3.1.2 Class 4. The thread for class 4 neckties shall be Blue M, C.A. 66027.

3.2.3.1.3 Class 5. The thread for class 5 neckties shall be Black AA, C.A. 66043.

3.2.3.2 Colorfastness. The dyed thread shall show fastness to wet-dry cleaning equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show good fastness to wet-dry cleaning.

3.2.4 Tape. The tape for the retainer loop shall be 3/4 inch wide, nylon, conforming to type III of MIL-T-5038 or 3/4 inch wide of MIL-T-2283, and shall match the shade of the basic material. The dyed tape shall show fastness to wet-dry cleaning equal to or better than the standard sample. When no standard sample is available, the dyed tape shall show "good" fastness to wet-dry cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

3.2.5 Labels. Each necktie shall have an identification label conforming to type VI, class 4 of DDD-L-20 except that the size shall not apply. The labels shall show fastness to dry cleaning.

3.3 Design. The necktie shall be a two-fold, four-in-hand design, with pointed ends, machine sewn center seam, interlinings, a retainer loop, and ends faced with basic material (see figure 1).

3.4 Construction. The construction shall conform in all respects to the requirements specified in table I and herein.

3.4.1 Stitches, seams and stitchings. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table I. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams occur.

3.4.1.1 Type 101 stitching. Tension of 101 stitch tacking shall be adjusted and maintained so there will be no loose stitching resulting in either loose underneath or top thread, or excessively tight stitching puckering outward appearance of tabs.

3.4.1.1.1 Repairs of type 101 stitching. Repairs shall be accomplished by superimposing new tack in same location after removing threads of first broken tack.

3.4.1.2 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.4.1.2.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area and continue a minimum of 1 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

3.4.1.3 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. Both ends of all seams or stitching produced with 401 stitch type, when not turned under in a hem or held down by other stitching, shall have a 1/2 to 3/4 inch chain extending beyond each end. The looper (underthread) shall be hidden between the cover and lining assembly. All repairs shall be in accordance with 3.4.1.2.1a and 3.4.1.2.1b. Repairs may be made using 301 stitch type.

3.4.1.4 Automatic stitching. Automatic stitching machines may be used to perform any of the required stitch patterns provided the requirements of the stitch pattern, stitches per inch, size and type of thread are met, and at least three or more tying, overlapping or backstitches are used to secure the ends of the stitching.

3.4.1.5 Thread ends. All thread ends that are visible on the finished item shall be trimmed to a length of not more than 1/4 inch.

3.4.2 Fusing of ends of nylon tape. All ends of nylon tape shall be fused. The apparatus used to fuse the tape ends shall be capable of providing sufficient heat to provide a smooth edge and with the cut ends of the tape yarns all fused together. Fusing of the tape ends shall be accomplished prior to being assembled for stitching.

3.5 Repairs. Repairs such as mends, darns, or patches are not permitted on the neckties.

3.6 Patterns. Standard patterns, which provide an allowance for all seams will be furnished by the Government and shall be used as a guide for cutting working patterns. The standard patterns shall not be altered in any manner and the working patterns shall be cut to conform with the standard patterns.

3.6.1 Pattern parts. The component parts for the necktie shall be cut from materials as specified in accordance with pattern parts indicated below:

Material	Nomenclature	Cut
Polyester-wool cloth or polyester/acrylic/mohair cloth	Necktie	1
Polyester/acrylic/wool cloth	Interlining	1
	Interlining strip	1

3.7 Manufacturing operations requirements. The necktie shall be made by and with the use of all operations shown in table I. Unless otherwise specified in table I, the contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitching used to facilitate manufacture is permissible, providing the thread is removed or does not show on the necktie.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

3.8 Figure. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the written document shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the basic material for the necktie and the interlinings as indicated by the warp directional lines on patterns. b. The neckties may be cut in two pieces, but when so cut, the pieces shall match each other. The piecing shall be not less than 17 inches nor more than 28 inches from the small end of the tie. c. The neckties, when cut in two pieces, shall have a seam allowance of 3/8 inch on each part. d. Cut the nylon tape for retainer loop 2-3/4 ± 1/16 inches long. The ends shall be heat fused. NOTE: Seam allowance is not provided on Government pattern for a two piece necktie.						
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.2.2 shall be removed from production and replaced with nondefective and properly matched components.						
3.	Marking. When the necktie is made of two pieces, the parts of the necktie shall be marked or bundled to insure a uniform shade throughout. Any method of marking may be used except:						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. (cont'd)						
	a. Metal fastening devices.						
	b. Sew on type tickets.						
	c. Adhesive type tickets which leave traces of adhesive on the material after removal of tickets.						
4.	Joining.						
	When cut into two pieces, join the pieces and press the seam open with a heated pressing iron or machine.	101 or 301 or 401	SSa-1	10-14	A A A	 A A	
5.	Finish ends of necktie.						
	Finished appearance. The ends of the necktie shall finish flat and smooth without twists, pleats, puckers or fullness.						
	a. Fold ends of necktie to outside (face to face) forming point with raw edges even, stitch edge forming point.	101 or 301 or 401	SSa-1	10-14	A A A	 A A	
	b. Turn points, forcing out edges and points and press with a heated pressing iron or machine.						

MIL-N-41804E

Source: https://assist.dla.mil - Downloaded: 2026-10-21 19:30Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Attach retainer loop.						
	Finished appearance. The retainer loop shall have sufficient fullness to accommodate the narrow end of necktie, with no twists or puckers. The stitching shall not show on outside of necktie. The retainer loop shall finish on the underside of necktie, centered horizontally with a ± 1/8 inch tolerance and 8 ± 1/4 inches from bottom point of wide end of necktie.						
	a. Fold necktie in half lengthwise (face to face); position retainer loop inside of fold, with ends 5/8 to 3/4 inch from each raw edge and stitch each end full width through necktie, with the stitching 1/4 to 3/8 inch from end(s) of loop.	101 or 301 or 401		6-10	A A A	 A A	
	or						
	b. As an alternate, the retainer loop may be attached by a loop automatic tie folding and sewing machine. The finished appearance of the retainer loop shall have sufficient fullness to accommodate the narrow end of the necktie, with no twists or puckers. The stitching shall show on the outside of the loop, but will be sewn with matching thread. The retainer loop shall finish on the underside of the necktie, centered horizontally with a ± 1/8 tolerance, and 8 ± 1/4 inches from the bottom point of the wide end of the necktie. Fold the retainer loop 3/8 inch from the ends and stitch through the loop 1/8 ± 1/16 inch from the folded edge. The folded edge shall be turned to the inside of the loop.	101 or 301 or 401	LSBx-(A)	6-10	E E E	 E E	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Position identification label.						
	Position label to wide end of interlining, 1/4 to 3/8 inch from bottom edge and stitch label to interlining on all four sides.	101 or 301	LSbj-1	8-14	A A	 A	
8.	Join necktie and interlining.						
	Finished appearance. The center seam shall finish with a loose and elastic stitching and shall be flat and smooth. The wide end of the interlining shall extend from 3-1/2 to 4 inches from finish point of the wide end of necktie.						
	a. Fold necktie in half lengthwise (face to face) and stitch center seam of necktie from bottom of wide end for a distance of 3 to 4 inches.	101 or 301 or 401	SSa-1	10-14	A A A	 A A	
	b. Position 3/4 inch wide interlining strip in the center of the interlining and 1-3/8 inches from bottom of wide end as indicated on pattern.						
	c. Position side edge of 3/4 inch interlining strip even with necktie side edge and stitch center seam of necktie with the stitching centered on the interlinings. The interlinings shall be free for a distance of 2 to 2-1/2 inches at the wide end.	104		2-5	A		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Join necktie and interlining. (cont'd)						
	d. As an alternate the necktie and interlining may be joined with the automatic tie folding and sewing machine. The finished appearance of the center seam shall finish with a loose basting stitch and shall be flat and smooth. The wide end of the interlining shall extend from 3-1/2 to 4 inches from the finished point of the wide end of the necktie.	205		1-1/2-2	E		
	(1) Position 3/4 inch wide interlining strip in the center of the interlining and 1-3/8 inches from the bottom of wide end as indicated on pattern.						
	(2) Position side edge of 3/4 inch interlining strip even with necktie side edge and stitch center seam of necktie with the stitching centered on the interlinings. The interlinings shall be free for a distance of 2 to 2-1/2 inches at the wide end. (See 3.2.3 for thread requirements when alternate method to stitch interlining is used.)						
9.	Turn necktie and press.						
	Turn necktie and press with a heated pressing iron or machine with the interlining flat, with the center seam on center (± 1/4 inch) and without any seam impression or gloss.						
10.	Cleaning.						
	Trim thread ends, remove loose threads, spots or stains, and shade tickets. Thread ends shall not be trimmed by singeing.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

3.9 Finished measurements. The finished dimensions for the neckties shall conform to figure 1.

3.10 Workmanship. The finished neckties shall conform to the quality of product established by this document. The occurrence of defects, shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Quality conformance inspection. Unless otherwise specified sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

4.2.1.1 Component and material testing. In addition to any testing required by 4.2.1, components and materials shall be tested as shown in table III. The methods of testing specified in FED-STD-191, wherever applicable and as listed in table III, shall be followed. All test reports shall contain the individual values used in expressing the final results. The sample unit shall be 2 yards full width for the polyester/acrylic/mohair basic material (when used) and 1/2 yard full width for the interlining. The sample size shall be as specified in table II. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified.

TABLE II. Sample size

Lot size (yards)	Sample size (No. of sample units)
800 or less	2
801 to 22,000	3
22,001 and over	5

TABLE III. Component and material tests

Component or material	Characteristic	Requirement paragraph	Test method
Polyester/acrylic/mohair (basic material)	Material and fiber identification	3.2.1	1/
	Weave	3.2.1	Visual 2/
	Yarn ply	3.2.1	Visual 1/
	Weight	3.2.1	5041
	Yarns per inch	3.2.1	5050
	Breaking strength	3.2.1	5100
	Shrinkage	3.2.1	5558
	Colorfastness to:		
	Light	3.2.1	5660
	Laundering	3.2.1	5614
	Perspiration	3.2.1	5680
	Crocking	3.2.1	5651
	Wet-dry cleaning	3.2.1	5622
Interlining material	Material and fiber identification	3.2.2	1/
	Weave	3.2.2	Visual 2/
	Weight	3.2.2	5041
	Yarns per inch	3.2.2	5050
	Crease-resistance	3.2.2	5212

1/ A certificate of compliance shall be submitted and will be acceptable for the stated requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

2/ One determination shall be made on each sample unit and the results reported as "Pass" or "Fail".

4.2.2 End item visual examination. The end item shall be examined for the defects listed in table IV. The lot size shall be expressed in units of neckties. The sample unit shall be one necktie. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.0 for major defects and 2.5 for total (major and minor combined) defects.

TABLE IV. End item visual defects

Examine	Defect	Classification Major	Minor
Material defects and damages	Any cut, hole, tear, needle chew or weakening defect in material.	X	
	Any exposed drill hole.		X
	Variation in shade within a part or between parts.		X
	Any abrasion marks, broken or missing yarns or multiple floats.	X	
	Any mend, darn, or patch.	X	
	Parts not cut correctly with respect to material directional lines.	X	
	Needle chews.	X	
Seams and stitchings	Open seams:		
	- 1/2 inch or less.		X
	- More than 1/2 inch.	X	
	NOTE: A seam shall be classified as an open seam when one or more stitches joining a seam are broken, or when two or more consecutive skipped or runoff stitches occur.		
Raw edge (on edge required to be finished)	More than 1/2 inch in length when securely caught in stitching.		X
	NOTE: Raw edge not securely caught in stitching shall be classified as an open seam.		
Seam and stitch type	Not specified seam or stitch type.	X	
	Seam twisted, pleated, or badly puckered (unless otherwise classified herein).		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Seam and stitch type (cont'd)	Any line of stitching not beginning or ending where specified (unless otherwise classified herein).		X
	Any seam not lapped or finished as specified.		X
Stitch tension	Tension loose, resulting in loose bobbin or top thread.		X
	Tension tight, resulting in puckering of material.		X
Stitches per inch (all types of stitching)	One stitch less than minimum specified. 1/		X
	Two or more stitches less than minimum specified. 1/	X	
	Two or more stitches in excess of maximum specified. 1/		X
	NOTE: Variation in the number of stitches per inch caused by operator speeding up the machine and pulling the material in order to sew over heavy places, or in turning corners shall be classified as follows: - Within the minor defect classification - no defect. - Within the major defect classification - minor defect.		
Thread breaks, skipped stitches, or runoffs	Overstitched less than 1 inch in each direction beyond defective stitching area.		X
	Overstitched less than 1/2 inch in each direction beyond the defective stitching area.		X
	NOTE: Thread breaks or two or more consecutive skipped or runoff stitches not overstitched shall be classified as open seams.		

1/ Score only where the condition exists for 3 inches or more or in several areas with an accumulated distance of 5 inches or more in an individual seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Stitching ends	Not secured as specified		X
Rows of stitching	One or more required rows of stitching omitted:		
	- Affecting serviceability seriously.	X	
	- Affecting serviceability but not seriously.		X
Shade and appearance	Shade not comparable to standard or approved sample.		X
	Dye streaks clearly visible.		X
Cleanness	Any spot or stain on outside.		X
	Any shade mark not removed.		X
	Thread ends not trimmed as specified or loose threads not removed.		X
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein).	X	
	Any operation not performed as specified (unless otherwise classified herein).		X
	Color of component not as specified.		X
Cutting	Not cut in accordance with document requirements.	X	
	Constructed of more than two parts.	X	
	Joining seam (two piece construction) less than 17 inches or more than 28 inches from small end of necktie measured along single folded edge.		X
Pressing	Omitted, poorly pressed, not pressed as specified exhibiting a double crease line.		X
	Burned or scorched.	X	
	Glossy, wrinkled, or creased.		X
	Edge bulky (not pressed solidly).		X
	One or more seams not pressed in the direction specified.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Tape	Any hole, tear, cut or frayed edge.	X	
	Not continuous, i.e., spliced.	X	
	Ends not fused as required.	X	
	Frayed or scalloped edges not firmly or tightly woven.	X	
Label	Missing, incorrect or illegible.	X	
	Not stitched on all four sides.		X
	Stitching through the printing.		X
	Position off by more than 1/2 inch.	X	
Marking	Omitted, incorrect, illegible, misplaced, or size of characters not as specified.	X	
Center seam	Full, tight, or twisted.	X	
	Joining seam (when ties are pieced) not pressed open.		X
Interlining	Missing.	X	
	Pleated, puckered, or not laying flat.	X	
	Extended to less than 3-1/2 or more than 4 inches from point at wide end of necktie.		X
	Wide end of interlining free for less than 2 inches or more than 2-1/2 inches.		X
Interlining strip	Missing.	X	
	Pleated, puckered, or not laying flat.	X	
	Not positioned as specified.	X	
Retainer loop	Missing.	X	
	Twisted or puckered.	X	
	Not positioned as specified.		X
	Stitching visible on outside of necktie.		X
	Stitching not as specified.	X	
Pointed ends	One or both pointed ends poorly shaped.	X	
	Twisted, affecting appearance.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

4.2.3 End item dimensional examination. The end item shall be examined for the defects listed below. The lot size shall be expressed in units of neckties. The sample unit shall be one necktie. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

	Defect
a. Full length (See A of figure 1)	Any measurement deviating from dimension and tolerances specified in figure 1 shall be scored as a size measurement defect
b. Width at wide end (See B of figure 1)	
c. Width at narrow end (See C of figure 1)	
d. Width of neckband (See D of figure 1)	

4.2.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defects
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such, as: incomplete closure of container flap, loose strapping, inadequate stapling, or improper taping. Bulged or distorted container.
Content	Number of bundles per container is more or less than required. Number of neckties per bundle is more or less than required. 1/

1/ For this defect, five bundles from each container in the sample shall be examined.

4.2.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet patterns not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Five neckties of one class only shall be placed full length one on top of another and folded in half. The neckties shall then be folded in half again over a paperboard trapezoid having a minimum thickness of 0.033 inches and dimensions of 14-3/8 inches long, 3-1/4 inches wide at the base and 1-3/4 inches wide at the top. In folding the neckties, the wide end shall not extend beyond the base of the paperboard trapezoid. The neckties shall be secured to the trapezoid by means of a paper band or cotton twine to form a neat bundle.

5.1.2 Commercial. Neckties shall be preserved in accordance with ASTM D 3951.

5.2. Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Two hundred and twenty-five neckties, of one class only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container, conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, with every other bundle reversed, nine in length, one in width and five in depth, with the length of the bundles parallel to the end panels of the shipping container. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15-1/2 inches in width, and 6-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. Two hundred and twenty-five neckties, of one class only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container, conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, with every other bundle reversed, nine in length, one in width, and five in depth, with the length of the bundles parallel to the end panels of the shipping container. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15-1/2 inches in width, and 6-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.2.4.

5.2.3 Commercial packing. Neckties, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), neckties, packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract, or purchase order, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The necktíes are intended for wear by male military personnel of the Department of Defense.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Class required (see 1.2).
c. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
d. Type and class of unit load required (see 5.2.1).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
f. When palletization is required (see 5.3).

6.3 Samples. For access to samples, address the contracting activity issuing the invitation for bids.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.5 Subject term (key word) listing.

Dress clothing
Neckties, men's

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:

Army - GL
Navy - NU
Air Force - 11

Preparing activity:

Army - GL

Project No. 8440-0172


Review activities:

Army - MD
Navy - MC
Air Force - 82, 99
DLA - CT

User activity:

Air Force - 45

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

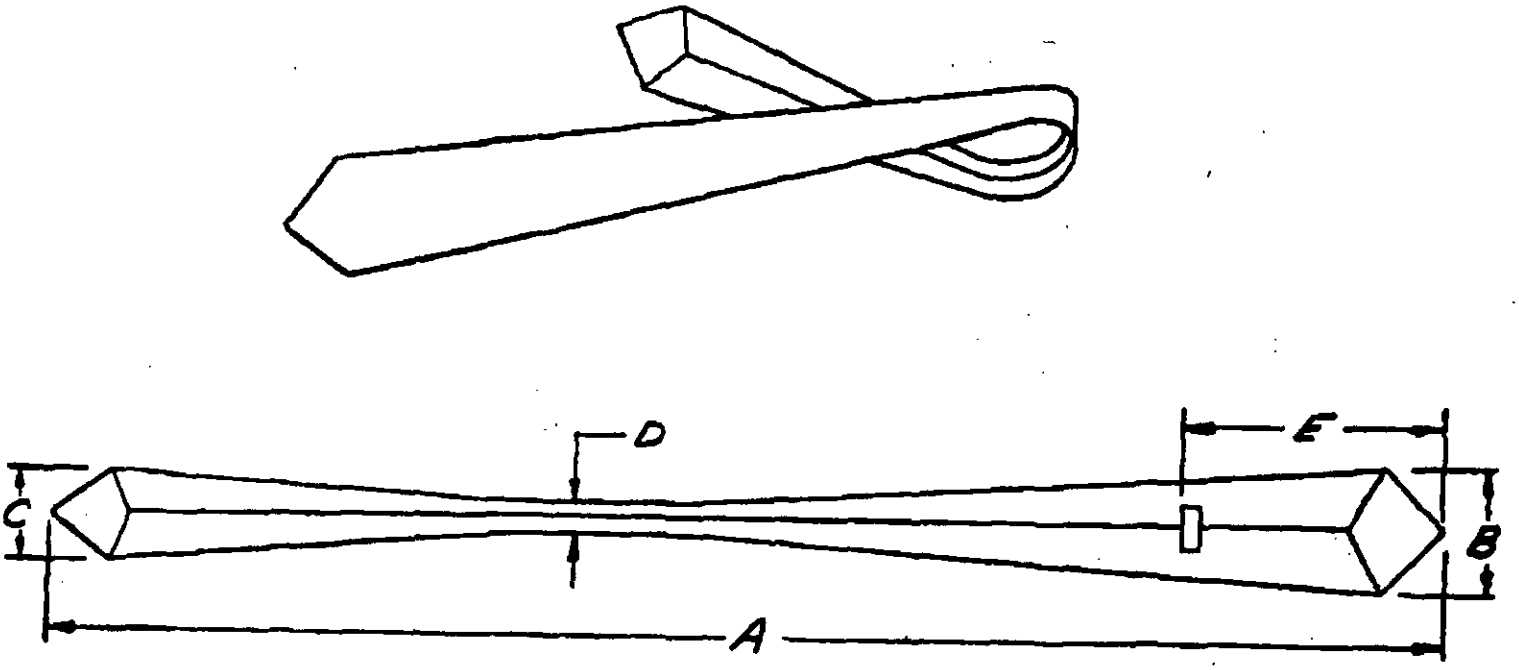

DIMENSIONS IN INCHES

	A		B	C	D	E
	MIN.	MAX				
ALL CLASSES	56	57 1/2	3 1/8	1 1/2	1 1/8	8
	TOLERANCE		± 1/8	± 1/8	± 1/8	± 1/4

FIG. 1 - NECKTIES MEN'S, FOUR-IN-HAND

2-1-541H

☆U.S. GOVERNMENT PRINTING OFFICE: 1987 - 704-036-73091

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-N-41804E	Neckties, Men's,Four-In-Hand

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER (Specify): _____
3b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	7b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
7c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

NATICK OP, 20 Nov 84

Source: https://assist.dla.mil - Downloaded: 2025-10-21T19:30Z
Check the source to verify that this is the current version before use.