MILITARY SPECIFICATION

POTS, COOKING, ALUMINUM, RECTANGULAR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for three sizes of a heavy-duty, rectangular, aluminum cooking pot with cover.

1.2 Classification. The cooking pots and covers covered by this specification shall be of the following sizes as specified (see 6.2):

Size 1 - 34 Quarts
Size 2 - 12 Quarts
Size 3 - 9 Quarts

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-T-60 - Tape, Pressure-Sensitive, Adhesive; Waterproof for Packaging and Sealing.

FSC 7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking for U.S. Military Property.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

American Society for Testing and Materials (ASTM)

Designation A473 - Stainless and Heat-Resisting Steel for Cold Heading and Cold Forging - Bar and Wire, Standard Specification for
Designation B108 - Aluminum-Alloy Permanent Mold Castings, Standard Specification for
Designation B209 - Aluminum-Alloy Sheet and Strip, Standard Specification for
Designation B211 - Aluminum-Alloy Bars, Rod, and Wires, Standard Specification for

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103).

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for references from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.2 and 6.3).

3.2 Materials. The materials used shall conform to the applicable referenced documents and requirements specified herein. Materials not definitely specified shall be of the best quality used for the purpose in commercial practice.

3.2.1 Aluminum.

3.2.1.1 Aluminum sheet shall conform to type 5052 of ASTM B209.

3.2.1.2 Aluminum bar stock shall conform to type 5052 of ASTM B211.

3.2.1.3 Aluminum mold castings shall conform to alloys CS74A or ZC81B of ASTM B108.

3.2.2 Stainless steel.

3.2.2.1 Stainless steel wire shall conform to types 302 or 304 of ASTM A473.

3.3 Design and construction. The design and construction shall be in accordance with the requirements specified herein and as shown on figures 1 and 2. Capacity and dimensions for each size pot and cover shall be as specified in table I. Unless otherwise specified herein, dimensions shall have a tolerance of plus or minus 1/16-inch.

TABLE I. Capacity and dimensions (see figure 1)

Part	Dimensions (inches)	Size and Capacity (approx. fluid quarts) Size 1 (34 qts)	Size 2 (12 qts)	Size 3 (9 qts)
Body	A	11-3/4	10-3/4	9-1/4
	B	18-1/2	9-5/16	8-1/2
	C	10-7/8	9-5/16	8-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacity and dimensions (see figure 1) (cont'd)

Part	Dimensions (inches)	Size and Capacity (approx. fluid quarts) Size 1 (34 qts)	Size 2 (12 qts)	Size 3 (9 qts)
Body (cont'd)	D-1	17-5/8	8-7/16	
	D-2 (Max)			8
	E-1	10	8-7/16	
	E-2 (Max)			8
	F	1-3/4	1-3/4	1-3/4
	G	1-3/4	1-3/4	1-3/4
	H	4-3/8	4-3/8	4-3/8
	I (Dia. Min)	0.306	0.306	0.306
	J (Min)	0.187	0.187	0.187
	K (Min)	0.187	0.187	0.187
Cover	L (Dia)	4	4	4
	M (Thick and Widtn) (Min)	1/8 x 5/8	1/8 x 5/8	1/8 x 5/8
	N	5-1/2	5-1/2	5-1/2
	O	1	1	1
	P	18-13/16	9-5/8	8-13/16
	Q	1	1	1
	R-1 (radius)	1-3/8	1-3/8	1-3/8
	R-2 (radius)	1-3/8	1-3/8	1-3/8
	R-3 (radius)	1-13/16	1-13/16	1-13/16
	R-4 (radius)	3	3	3
	R-5 (radius)	3/16	3/16	3/16
	S	11-3/16	9-5/8	8-13/16
	T (Dia)	6	6	6
	U (Min)	0.102	0.102	0.102
	V	5/8	5/8	5/8

3.3.1 Bodies. The pot bodies shall be formed seamless, by drawing or stamping, from one piece of aluminum alloy sheet conforming to 3.2.1.1. The finished utensil body shall not be less than 0.187 inch thick at any point. The bottom shall be flat. The side walls shall be vertical and shall be flared 90 degrees at the top edge.

3.3.1.1 Handles for bodies. The handles for the bodies shall be drop-type chest handles, centered and held in place by a bracket. When not in use, the handle shall be held in position against the body by a torsion

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

spring in the bracket. Each handle shall be formed from a single piece of stainless steel wire, not less than 0.306 inch diameter, conforming to 3.2.2.1. The bracket used to hold the handle shall be made of cast aluminum conforming to 3.2.1.3 and shall be spot or fillet welded to the body. When spot-welded, the bracket shall be attached to the body by not less than six (6) spot welds. The welds shall be dressed and finished smooth. The torsion type spring in the handle bracket shall be fabricated from stainless steel. The handle assembly shall withstand the tests specified in 4.5 without failure of the welds or permanent deformation of either handle or the pot body.

3.3.2 Covers. Covers shall be formed seamless, by drawing or stamping, from one piece of aluminum alloy sheet conforming to 3.2.1.1. The finished cover shall be not less than 0.102 inch thick at any point. The recess for the cover handle shall be formed by drawing or stamping.

3.3.2.1 Handle for cover. The cover handle shall be fabricated from aluminum alloy conforming to 3.2.1.2. The handle shall be not less than 0.125 inch thick by 5/8 inch wide, with rounded edges. The handle shall be spot or fillet welded to the cover. When spot-welded, the handle shall be attached to the cover by not less than four (4) spot welds, at least two (2) at each end. Welds shall be dressed and finished smooth.

3.3.3 Nesting and storing. The size 3 pot shall nest in the size 2 pot up to the handles. These two pots (size 3 and size 2), when nested, and lying on their sides, shall store in the size 1 pot. The covers of the size 3 and size 2 pots shall also store in the size 1 pot (see figure 2).

3.4 Finish.

3.4.1 Body. The entire inside shall have a surface finish. The outside side walls shall have a satin finish and the outside bottom shall have a natural-metal finish.

3.4.2 Cover. The top outside surfaces shall have a satin finish. The remainder of the cover shall have a natural-metal finish. The top of the handle shall have a light buff (see 6.4).

3.5 Marking for identification. The letters "U.S.", the manufacturer's name, trademark, or trade name, the year of contract, and the capacity in quarts shall be indented in the size and location shown on figure 1 and in accordance with Military Standard MIL-STD-130. The surface opposite these markings shall show no signs of penetration or unevenness, nor shall the markings cause distortion of the adjacent surfaces.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The finished products shall be uniform in quality and temper. They shall be clean, smooth and free from buckles, cracks, sharp or raw edges, and any defect which may affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for defects listed in 4.4.2.1 for compliance with 4.4.2.2 and tested as specified in 4.5.

4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1 above, component and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 End item inspection. The inspection lot shall be all pots and covers of one size offered for inspection at one time. The sample unit for this inspection shall be one completely finished pot and cover.

4.4.2.1 Visual examination. Examination of the pots and covers shall be in accordance with the classification of defects set forth in table I. Inspection level II shall apply. The acceptable quality level (AQL) shall be a total of 6.5 defects per hundred units with a maximum of 2.5 major defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Pots and covers not finished as specified	X	
	Area of rust or corrosion	X	
	Stained, discolored, not uniform, imprint or water marks clearly noticeable		X
	Deep scratches or tool marks on the interior surface, clearly noticeable	X	
	Pitted, scratched or tool marks on the exterior surface, clearly noticeable		X
	Dirt, smudge, oil, grease or foreign matter		X
Design	Wrong size	X	
	Any characteristic or detail of construction not in accordance with specific requirements.	X	
Construction and workmanship, general	Pots incapable of being nested or stored as specified	X	
	Bottom of pot not flat	X	
	Split, crack, fracture, puncture, dent affecting serviceability	X	
	Dent or wrinkle affecting appearance		X
	Sharp edge or burr that may cause injury	X	
	Not one piece construction as specified	X	
	Side walls of pot not vertical	X	
	Component missing, distorted, not size or type specified	X	
Handles	Not specified type	X	
	Not located as shown on drawing	X	
	Pot handles not formed from single piece of steel wire		X
	Not connected as specified	X	
	Loose or not in proper alignment	X	
	Brackets not welded as specified	X	
Welding	Weld not fused properly	X	
	Burned through		X
	Cracked or fractured	X	
	Pitted, not smooth, flash or splatter not removed		X
Identification	Missing, incomplete, illegible, not specified size, not indented, not in proper location		X
Markings	Penetration of marking indentation; unevenness or distortion		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

4.4.2.2 Dimensional examination. Examination shall be made of the end item for defects in dimensions. Any dimension not within specified tolerances shall constitute a defect. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 4.0 defects per hundred units.

4.4.2.3 End item testing. When a first article is not required, the first produced pot and cover shall be tested as specified in 4.5.1 and 4.5.2. Each sample shall be tested in accordance with 4.5. The inspection level shall be S-3 with an AQL of 4.0 defects per hundred units.

4.4.2.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects will be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the acceptable quality level (AQL) shall be 2.5 defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings (exterior and interior container)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing, damaged or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of case liners or carton flaps; loose strapping; inadequate stapling; bulging or distortion of containers.
Contents (exterior and interior container)	Number per container is more or less than required.

4.5 Tests. Each sample pot, selected in accordance with 4.4.2.3, shall be tested as follows for compliance with 3.3.1.1.

4.5.1 The pot shall be suspended by one handle, with a load of 100 pounds suspended from the other handle, for at least 15 minutes. Failure of the welds or permanent deformation of either handle or the pot body shall be considered a failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:29Z
Check the source to verify that this is the currentversion before use.

4.5.2 The pot shall be loaded internally with the weight specified in table III for the respective size and lifted vertically by the handles to a height of 3 feet and held in this position for at least 5 minutes. Failure of the welds or permanent deformation of either handle or the pot body shall be considered a failure of this test.

TABLE III. Weights

Size	Weights (pounds)
1	272
2	96
3	72

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pot and each cover shall be individually form-wrapped in two thicknesses of Kraft paper having a minimum basis weight of ten pounds per ream (24 by 36-500). The cover shall be secured to the top of the pot in a minimum of four places by strips of tape, minimum 2 inches wide, conforming to PPP-T-60.

5.1.1.1 Unit package. One pot and cover wrapped as specified in 5.1.1 shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF, variety SW, or type SF, class domestic of PPP-B-636. Box closure shall be in accordance with PPP-B-636.

5.1.2 Level C. One size pot and cover shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Four (4) size 1, eight (8) size 2, or eight (8) size 3 pots and covers packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed, waterproofed, by means of tape, and reinforced with flat strapping or tape bonding in accordance with PPP-B-636.

5.2.2 Level B. Four (4) size 1, eight (8) size 2, or eight (8) size 3 pots and covers, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:29Z
Check the source to verify that this is the currentversion before use.

SF, class domestic of PPP-B-636. Each shipping container shall be closed in accordance with method II of the appendix of PPP-B-636.

5.2.2.1 When specified (see 6.2) the shipping container shall be V3c, V3s, or V4s, fabricated and closed in accordance with PPP-B-636.

5.2.3 Level C. One size pot and cover, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Pots and covers covered by this specification are intended for use with submarine and other Military cooking ranges.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Size of pot and cover required (see 1.2).
c. When a first article is required (see 3.1 and 6.3).
d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
e. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Preparing activity:

Army - GL

Project No. 7330-0474

Review activities:

Army - MD
Navy - MS, YD

User activities:

Navy - MC, CG

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

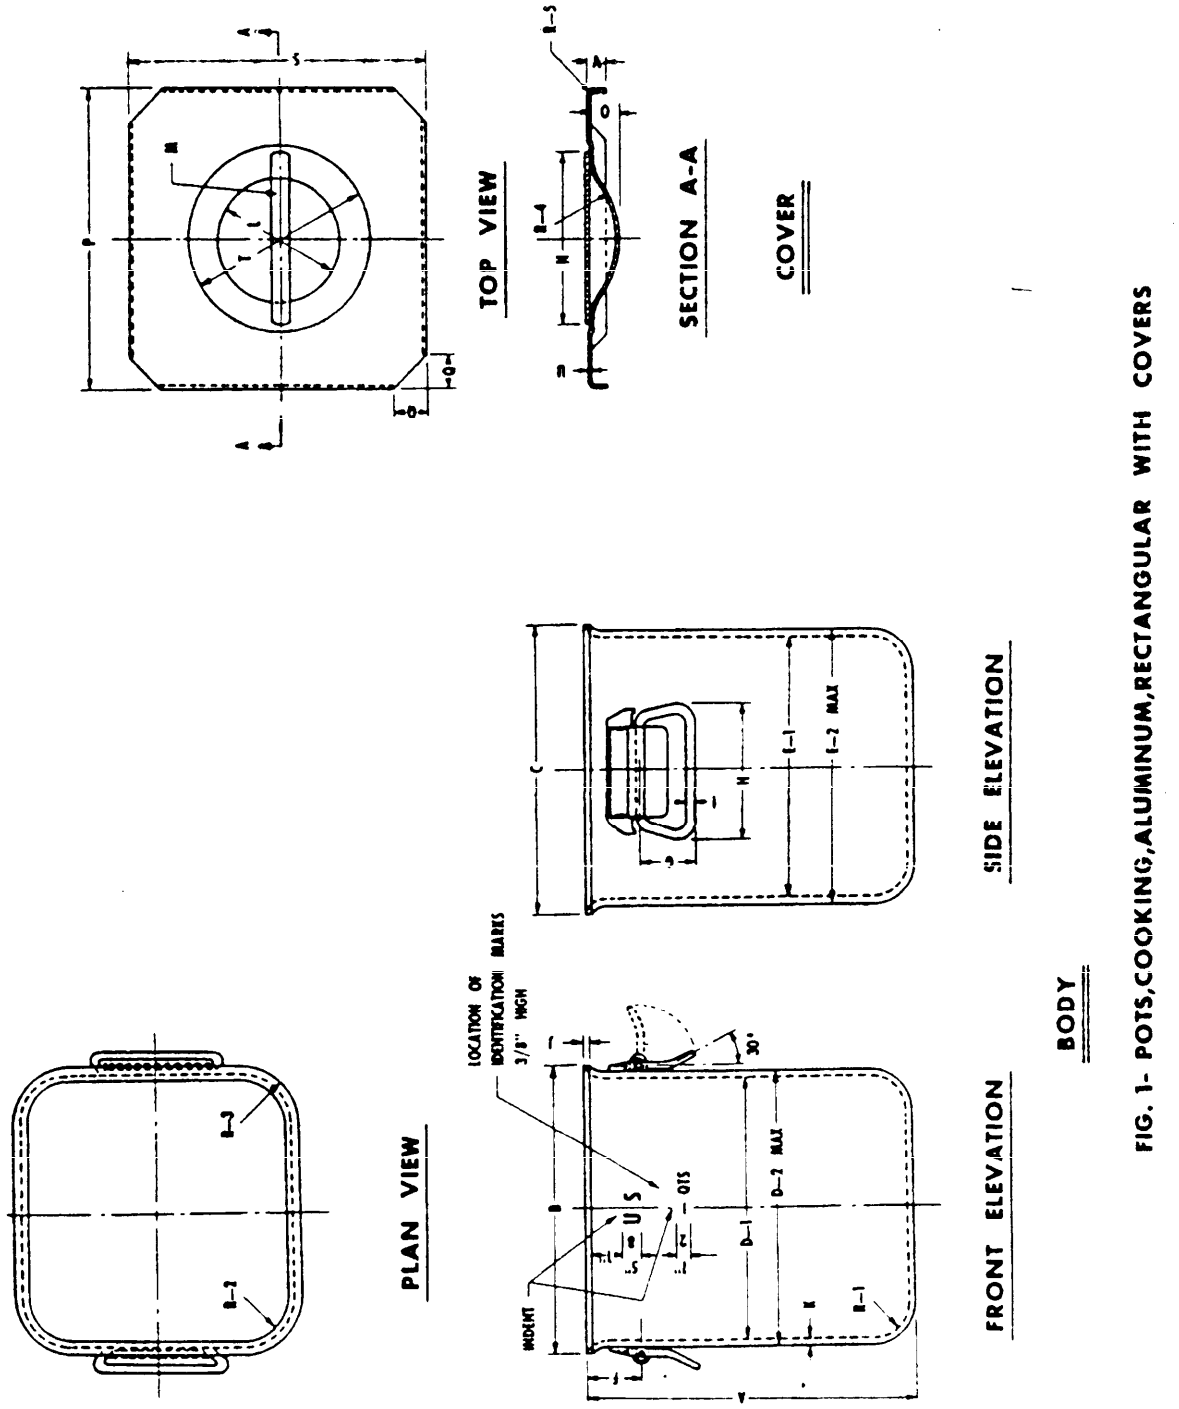


FIG. 1- POTS,COOKING,ALUMINUM,RECTANGULAR WITH COVERS

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:29Z
Check the source to verify that this is the current version before use.

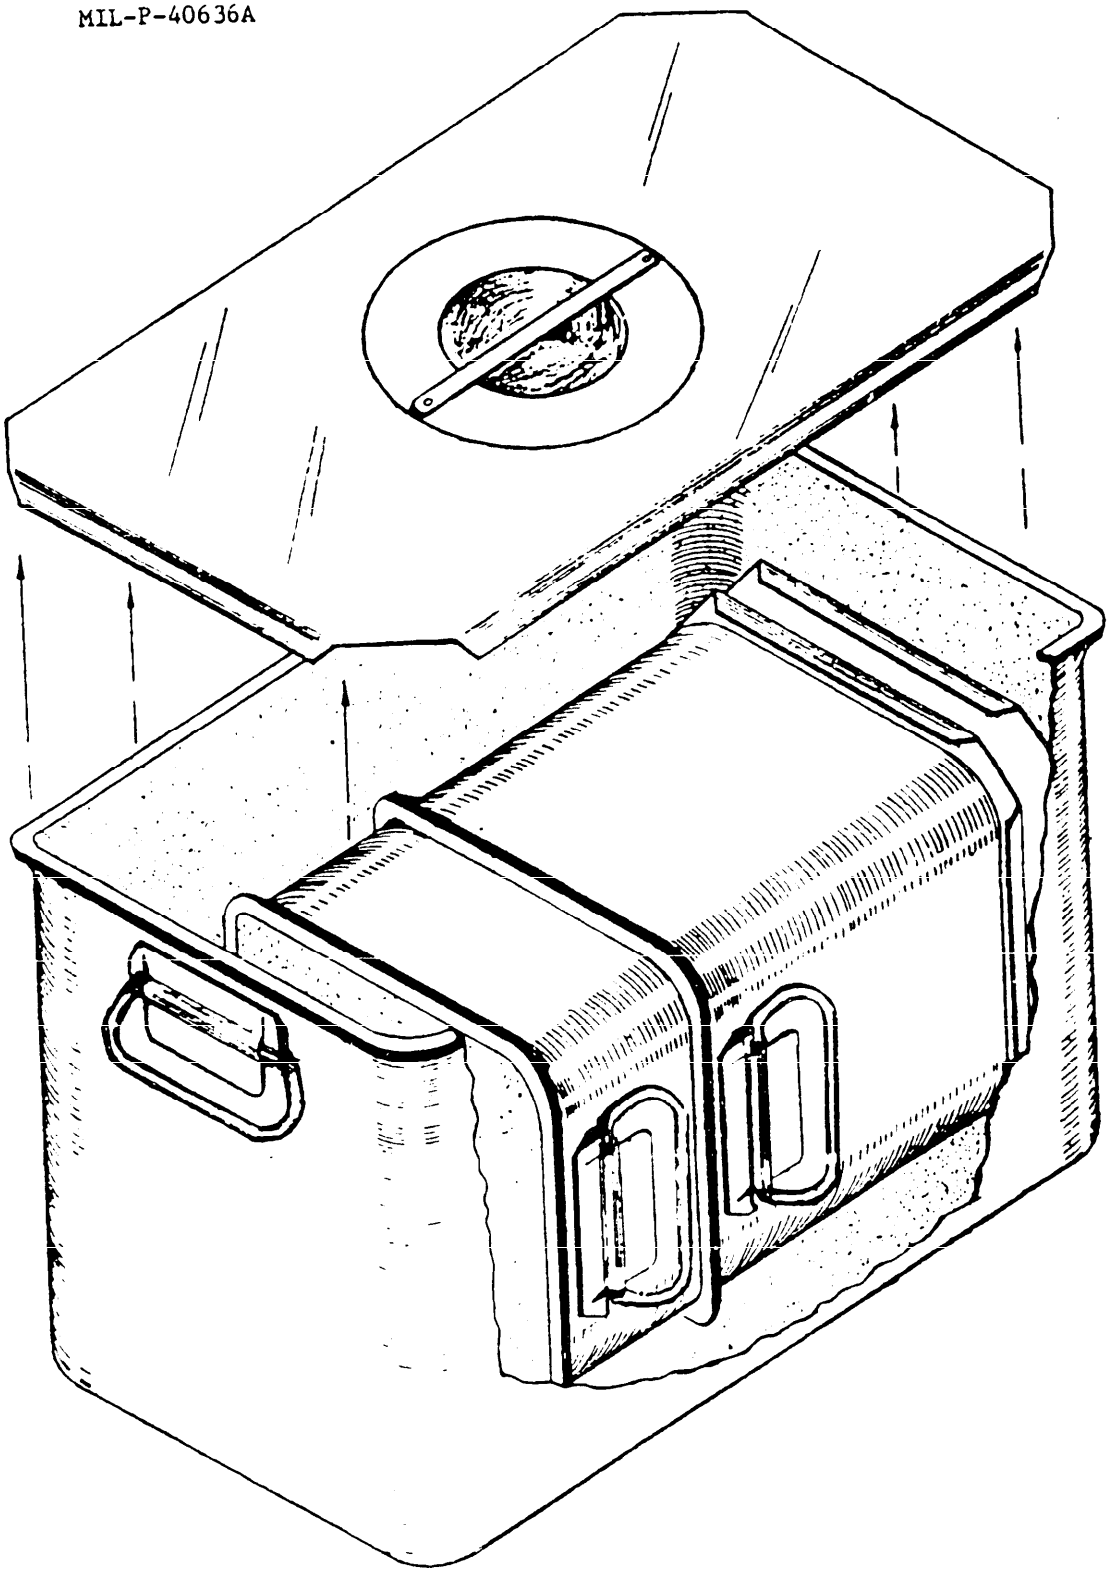


FIG.2

POTS , COOKING , ALUMINUM , RECTANGULAR WITH COVERS - METHOD OF STORAGE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T19:29Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STSNLT-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



Commander
US Army Natick Laboratories
ATTN: STSNLT-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026l0-21T19:29Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

Pots, Cooking, Aluminum, Rectangular MIL-P-40636A

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-21T19:29Z
Check the source to verify that this is the current version before use.