

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, MICA DIELECTRIC, HIGH RELIABILITY STYLE CMS03

This specification is approved for use within the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-87164(USAF).

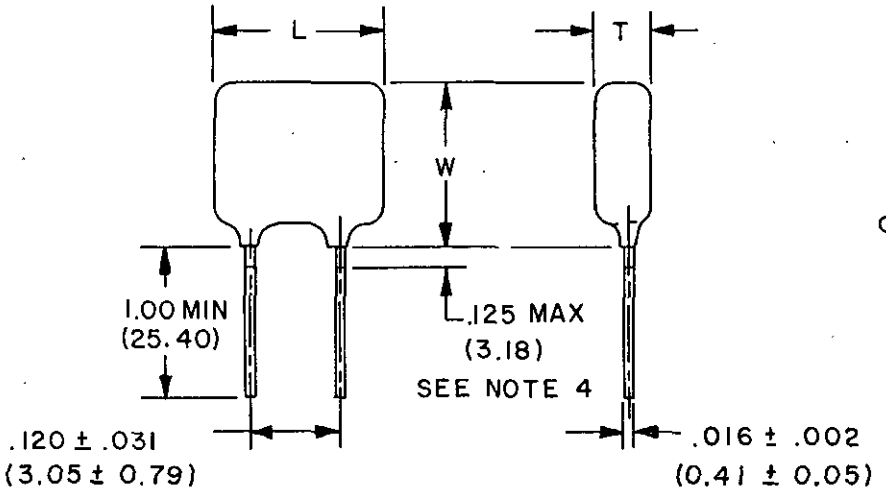



CIRCUIT DIAGRAM

Capacitance (pF)	L				T				W	
	Min 1/		Max		Min 1/		Max		Max	
1 - 12	.230	(5.84)	.290	(7.37)	.090	(2.29)	.140	(3.56)	.210	(5.33)
15	.230	(5.84)	.290	(7.37)	.090	(2.29)	.140	(3.56)	.210	(5.33)
18 - 20	.230	(5.84)	.290	(7.37)	.090	(2.29)	.140	(3.56)	.220	(5.59)
22 - 24	.240	(6.10)	.300	(7.62)	.090	(2.29)	.150	(3.81)	.229	(5.59)
27	.240	(6.10)	.300	(7.62)	.100	(2.54)	.160	(4.06)	.230	(5.84)
30 - 33	.240	(6.10)	.300	(7.62)	.100	(2.54)	.160	(4.06)	.230	(5.84)
36	.240	(6.10)	.300	(7.62)	.100	(2.54)	.160	(4.06)	.240	(6.10)
39	.240	(6.10)	.310	(7.87)	.110	(2.79)	.170	(4.32)	.240	(6.10)
43	.240	(6.10)	.310	(7.87)	.110	(2.79)	.170	(4.32)	.249	(6.10)
47 - 51	.240	(6.10)	.310	(7.87)	.110	(2.79)	.180	(4.57)	.250	(6.35)
56	.250	(6.35)	.320	(8.13)	.120	(3.05)	.180	(4.57)	.250	(6.35)
62	.250	(6.35)	.320	(8.13)	.130	(3.30)	.180	(4.57)	.250	(6.35)
68	.250	(6.35)	.330	(8.38)	.130	(3.30)	.190	(4.83)	.260	(6.60)
75 - 82	.250	(6.35)	.330	(8.38)	.140	(3.56)	.190	(4.83)	.260	(6.60)
91	.260	(6.60)	.330	(8.38)	.150	(3.81)	.200	(5.08)	.270	(6.86)
100 - 110	.260	(6.60)	.340	(8.64)	.160	(4.06)	.210	(5.33)	.280	(7.11)
120	.270	(6.86)	.350	(8.89)	.160	(4.06)	.220	(5.59)	.290	(7.37)

1/ Minimum dimensions are listed as information only.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Metric equivalents are in parentheses.
4. This dimension may not be solderable as it may be covered by a clear epoxy coating.

FIGURE 1. Style CMS03.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1.

Case material: Resin (dipped).

Capacitance value: See table I.

Capacitance tolerance: See table I.

DC rated voltage: 300 volts.

Operating temperature range: -55°C to +125°C.

Characteristic: See table I.

Dielectric: Mica.

Terminal leads: Lead wires shall be tin-lead coated copper (type C of MIL-STD-1276), or tin-lead coated copper clad steel (type W of MIL-STD-1276).

Marking: In accordance with MIL-C-87164 and figure 2 herein.

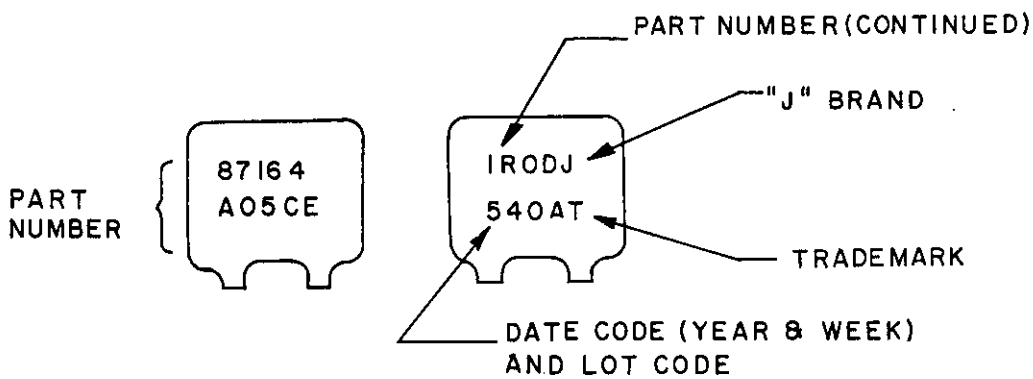


FIGURE 2. Marking example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics and part numbers.

Part number 1/ M87164A05	Capacitance value (pF)	Capacitance tolerance
CC1R0D	1.0	D
CC1R5D	1.5	D
CC2R0D	2.0	D
CC2R5D	2.5	D
CC3R0D	3.0	D
CC3R5D	3.5	D
CC4R0D	4.0	D
CC4R5D	4.5	D
CC5R0D	5.0	D
CC6R0D	6.0	D
CC7R0D	7.0	D
CC8R0D	8.0	D
CC9R0D	9.0	D
CC100D	10	D
CC110D	11	D
CC120J	12	J
CC150J	15	J
CC180J	18	J
EC200J	20	J
EC240J	24	J
EC270-	27	G, J
EC300-	30	G, J
EC360-	36	G, J
EC390-	39	G, J
EC430-	43	G, J
EC470-	47	G, J
EC510-	51	G, J, F
EC560-	56	G, J, F
EC620-	62	G, J, F
EC680-	68	G, J, F
EC750-	75	G, J, F
EC820-	82	G, J, F
EC910-	91	G, J, F
EC101-	100	G, J, F
EC111-	110	G, J, F
EC121-	120	G, J, F

1/ The complete part number will include a letter symbol to indicate the capacitance tolerance (e.g., M87164A05EC121F).

Custodian:
Air Force - 19

Review activities:
Air Force - 11
DLA - ES

Preparing activity:
Air Force - 19

Agent:
DLA - ES

(Project 5910-F411-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:54Z
Check the source to verify that this is the current version before use.