

FED. SUP CLASS
5975

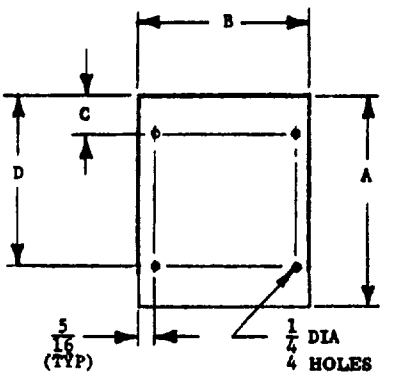

-1, -2, -4, -15, -16 & -17

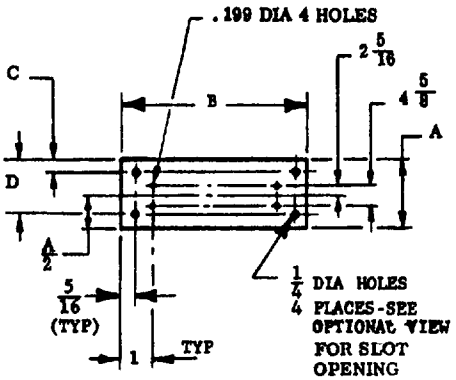

-3
(SEE NOTE 6)

TABLE I				
DASH NO.	A	B	C	D
-1	20 1/2	19	1 1/2	19
-2	19 1/4	19	1 1/2	17 3/4
-3	7	19	1 1/2	5 1/2
-4	11 3/4	19	1 1/2	9 5/8
-15	24 1/2	19	1 1/2	23
-16	1 3/4	19	7/8	____



SLOT OPENING VIEW OPTIONAL

NOTES:

1. MATERIAL: a. -1, -2, -4, -9 & -14 SHALL BE 11 GAUGE STEEL
   b. -5 THRU -8 & -10 THRU -13, -18 AND -19 SHALL BE 16 GAUGE STEEL
   c. -3, -15, -16 & -17 SHALL BE 1/8 THK ALUMINUM 6061 - T6.
2. RACK PLATES WITH LOUVERS SHALL HAVE 2 DOUBLE ROWS OF LOUVERS, 6 INCHES WIDE, 3/4 INCH HIGH WITH 1 INCH SPACE BETWEEN LOUVERS. EACH LOUVER SHALL HAVE APPROXIMATELY 1 3/4 SQUARE INCHES OF OPENING.
3. FINISH: SHALL BE IN ACCORDANCE WITH MIL-STD-808 AND FED-STD-595, GREEN COLOR NO. 24300.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS; ±1/32.
6. PLATE-3, SHALL BE SUPPLIED WITH MS14136-2 HANDLES AND NECESSARY HARDWARE.

DASH NO.	A	B	C	D
-17	8 3/4	19	1 1/2	7 1/4

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(H) DENOTES CHANGES

APPROVED 22 AUG 1972 REVISED (A) 8 SEP 1972 (B) 1 MAY 1973 (C) 26 JULY 1973 (D) 22 JAN 74 (E) 17 JUNE 1974 (F) 31 JAN 75 (G) 9 DEC 75 (H) 14 JUL 77

P.A. NAVY - AS Other Cust	TITLE PLATE-RACK	MILITARY STANDARD MS14140(AS)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23071

PROJECT NO. 5975-N539

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5975

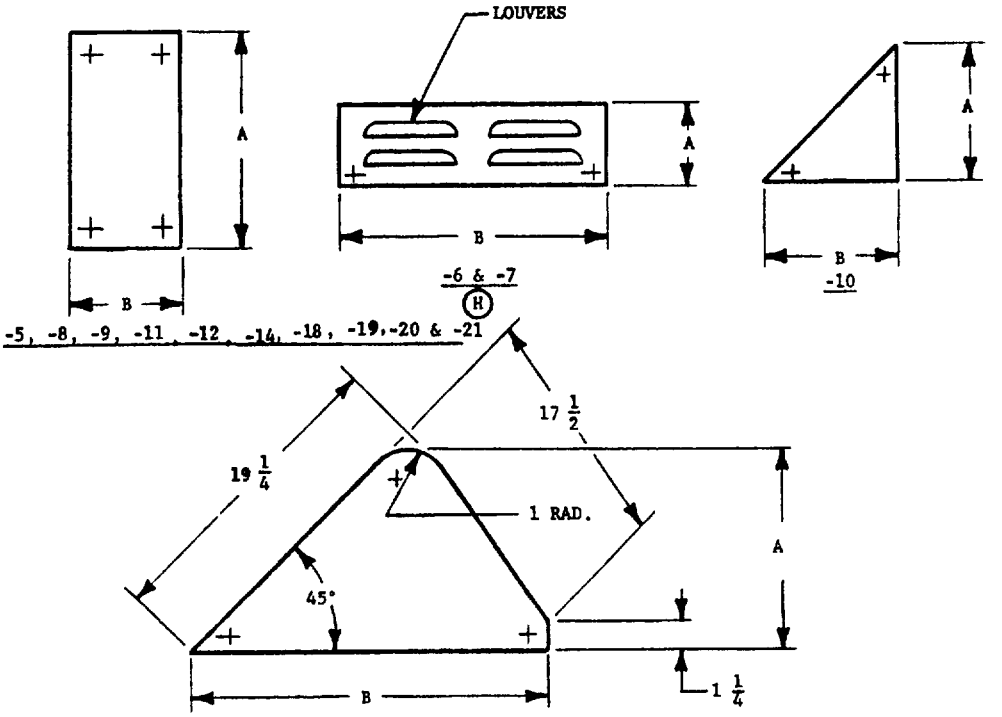


TABLE 2 (a)

DASH NO.	PLAIN		LOUVERED	
	A	B	A	B
-5	47 1/2	25	—	—
-6	—	—	6 3/8	18
-7	—	—	6 3/8	22 1/4
-8	75 3/8	15	—	—
-9	36	16 3/8	—	—
-10	5	5	—	—
-11	66	21 1/2	—	—
-12	33 3/8	25 1/2	—	—
-13	13 1/4	26	—	—
-14	1 5/8	19	—	—
-18	47 1/2	21 1/2	—	—
-19	73	21	—	—
-20	66	25	—	—
(H) -21	49	25	—	—

(a) ALL HOLES SHALL BE TEMPLATED FROM EQUIPMENT AT ASSEMBLY

APPROVED 22 AUG 1972 REVISED (H) FOR CHANGES SEE SHEET 2

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable

P.A. NAVY - AS Other Cust	TITLE PLATE-RACK	MILITARY STANDARD MS14140(AS)
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO 23071

☆U S GOVERNMENT PRINTING OFFICE 1977—703-020/4950

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:35Z
Check the source to verify that this is the current version before use.