
FED SUP CLASS
5307

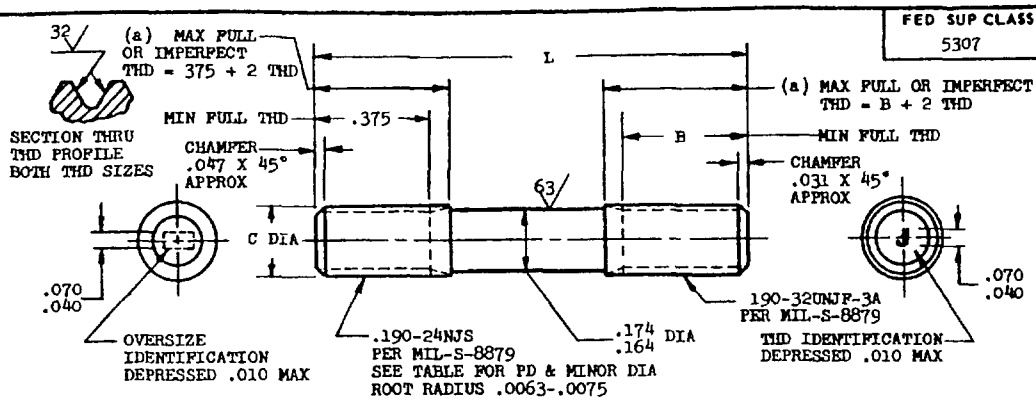

OVERSIZE IDENTIFICATION		STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C		.185 -.190	.185 -.190	.185 - 190	.194 - 199	.194 -.199
PD BEFORE PLATING		.1665-.1675	.1695-.1705	.1725- 1735	.1755- 1765	.1785-.1795
PD AFTER PLATING		.1670- 1685	.1700-.1715	.1730-.1745	.1760-.1775	.1790-.1805
PD LEAD THREAD		1607-.1627	.1637-.1657	.1667-.1687	.1697-.1717	.1727-.1747
MINOR DIA		.1434-.1474	.1464-.1504	.1494- 1534	1524- 1564	.1554- 1594
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
.812	.312	MS17299-011	MS17299-012	MS17299-013	MS17299-014	MS17299-015
.875	.375	MS17299-016	MS17299-017	MS17299-018	MS17299-019	MS17299-020
.938	438	MS17299-021	MS17299-022	MS17299-023	MS17299-024	MS17299-025
1.000	.500	MS17299-026	MS17299-027	MS17299-028	MS17299-029	MS17299-030
1.062	.500	MS17299-031	MS17299-032	MS17299-033	MS17299-034	MS17299-035
1.125	500	MS17299-036	MS17299-037	MS17299-038	MS17299-039	MS17299-040
1.188	.500	MS17299-041	MS17299-042	MS17299-043	MS17299-044	MS17299-045
1.250	500	MS17299-046	MS17299-047	MS17299-048	MS17299-049	MS17299-050
1.312	500	MS17299-051	MS17299-052	MS17299-053	MS17299-054	MS17299-055
1.375	.500	MS17299-056	MS17299-057	MS17299-058	MS17299-059	MS17299-060
1.438	.500	MS17299-061	MS17299-062	MS17299-063	MS17299-064	MS17299-065
1.500	.500	MS17299-066	MS17299-067	MS17299-068	MS17299-069	MS17299-070
1.562	500	MS17299-071	MS17299-072	MS17299-073	MS17299-074	MS17299-075
1.625	.500	MS17299-076	MS17299-077	MS17299-078	MS17299-079	MS17299-080
1.688	500	MS17299-081	MS17299-082	MS17299-083	MS17299-084	MS17299-085

(a) CROSS THREADING PERMISSIBLE AT THREAD RUNOUTS ON SHORT STUDS.

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR

MATERIAL: STEEL AMS 6322

HARDNESS ROCKWELL C26-32

FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.

SURFACE ROUGHNESS: MIL-STD-10. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES

MANUFACTURING SPECIFICATION AMS 7456 EXCEPT THREADS AS NOTED.

PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES; LINEAR DIMENSIONS ± 010

DO NOT USE UNASSIGNED PART NUMBERS

APPROVED 7 Sep 1961 REVISED

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

P A. WEP	TITLE	MILITARY STANDARD
Other Cust NONE	STUD-STRAIGHT .190-24 X .190-32 (MIL-S-8879 THREAD)	MS17299(WEP)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:06Z
Check the source to verify that this is the current version before use.