
FED. SUP CLASS
5935

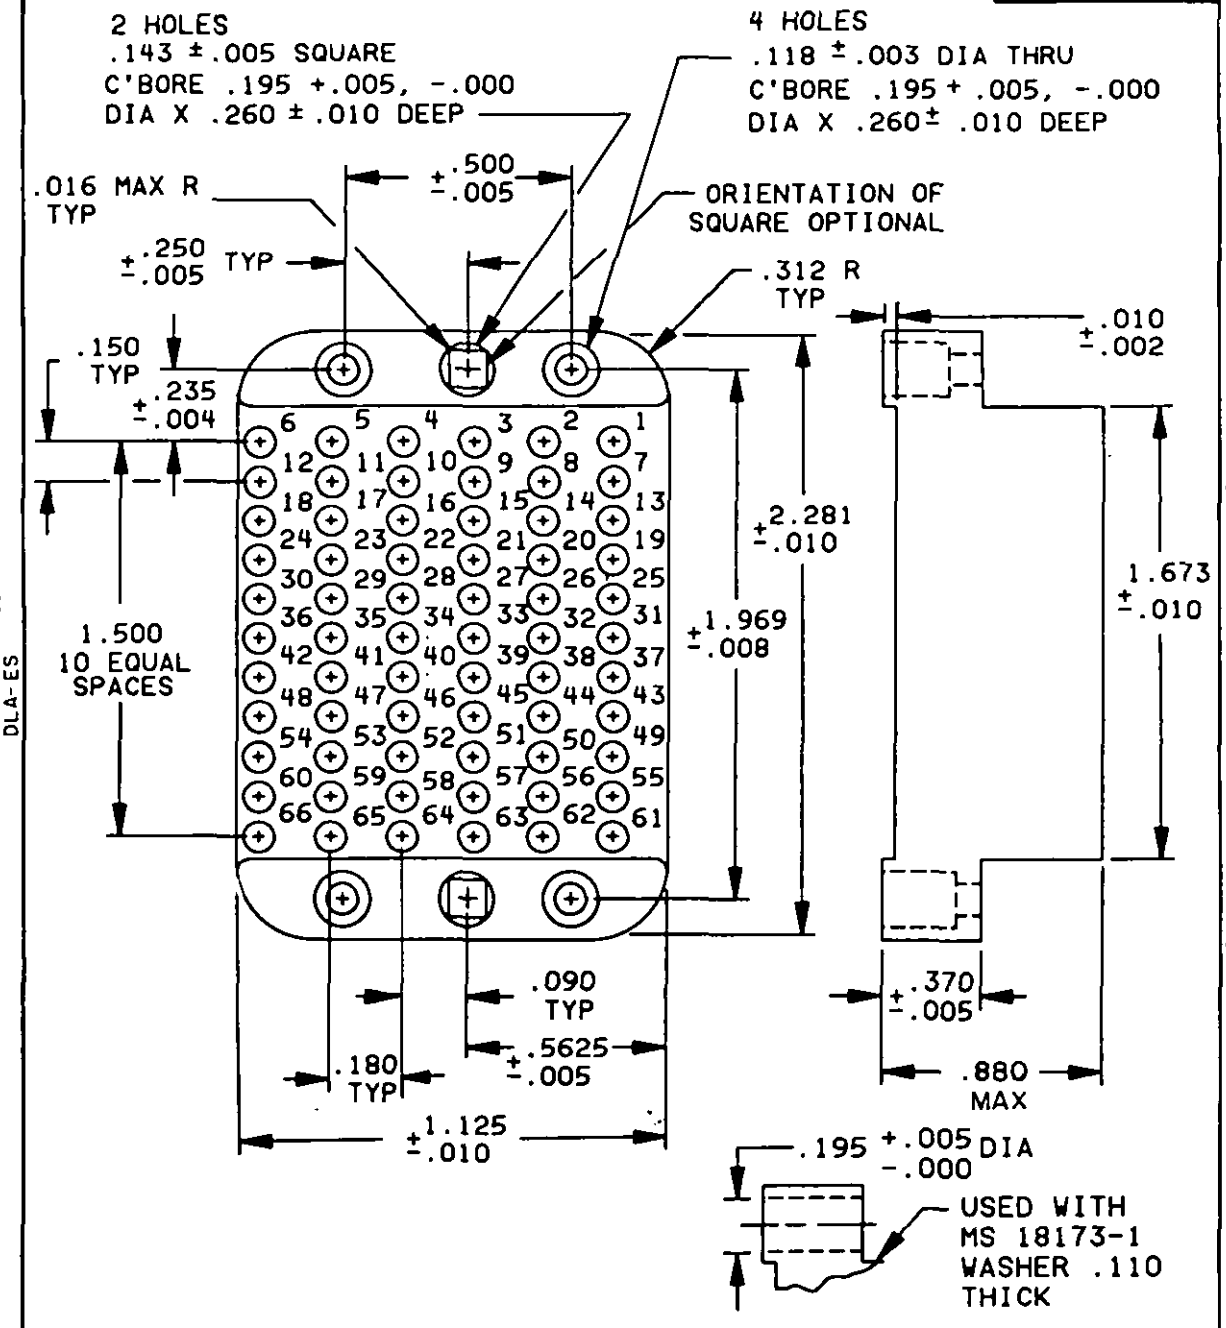

ALTERNATE CENTER HOLE CONSTRUCTIONS

DESIGN STANDARD FOR USE WITH MIL-C-28748/4.

MS Part No. MS18185-1 - Suitable for all applications
MS Part No. MS18185-2 - For long jackscrews and hood only (thru hole alternate construction)

Ⓒ denotes changes

APPROVED 20 December 1965 REVISED Ⓐ 20 May 1970 Ⓑ 23 June 1972 Ⓒ 18 March 1985

User activities: Army - ME, AM, AR
Navy - MC; OS
Air Force

Review activities: Army - MI, AT
Navy - AS; SH
Air Force - 11
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A Navy - EC Other Cust AF-85 Army -CR	International interest	TITLE Insert (insulator), rectangular connector, electrical, 66 (size 16 and 20 crimp removable) socket contacts	MILITARY STANDARD MS18185
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 1 OF 2

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3480-16

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

INCHES	MM
.002	0.05
.003	0.08
.004	0.10
.005	0.13
.008	0.20
.010	0.25
.016	0.41
.090	2.29
.110	2.79
.118	3.00
.143	3.63
.150	3.81
.180	4.57
.195	4.95
.235	5.97
.250	6.35
.260	6.60
.312	7.92
.370	9.40
.500	12.70
.5625	14.29
.856	21.74
1.125	28.58
1.500	38.10
1.673	42.49
1.969	50.01
2.281	57.94

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
3. Metric equivalents are given for general information only.
4. Tolerance between any two adjacent contact centers shall be ±.004 (0.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (0.15 mm).
5. Contact identification may be located on either side of the contact hole but shall appear on the front and rear of each insert.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.
(C) 8. Designed for use with MIL-C-39029/35 contacts.
9. Contact hole details shall be in accordance with MIL-C-28748.
10. The maximum insertion and withdrawal force (connector assembly) shall be 82.5 pounds.
11. Insert material shall be in accordance with MIL-C-28748.

APPROVED 20 December 1965 REVISED (A) 20 May 1970 (B) 23 June 1972 (C) for changes see page 2 of 2

Review activities: Army - MI, AT
Navy - AS, SH
Air Force - 11
DLA-ES

User activities: Army - ME, AM, AR
Navy - MC, OS
Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A Navy - EC Other Cust AF-85 Army - CR	International interest	TITLE Insert (insulator), rectangular connector electrical, 66 (size 16 and 20 crimp removable) socket contacts	MILITARY STANDARD MS18185
Procurement Specification MIL-C-28748		SUPERSEDES:	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.