FED SUP CLASS
5306

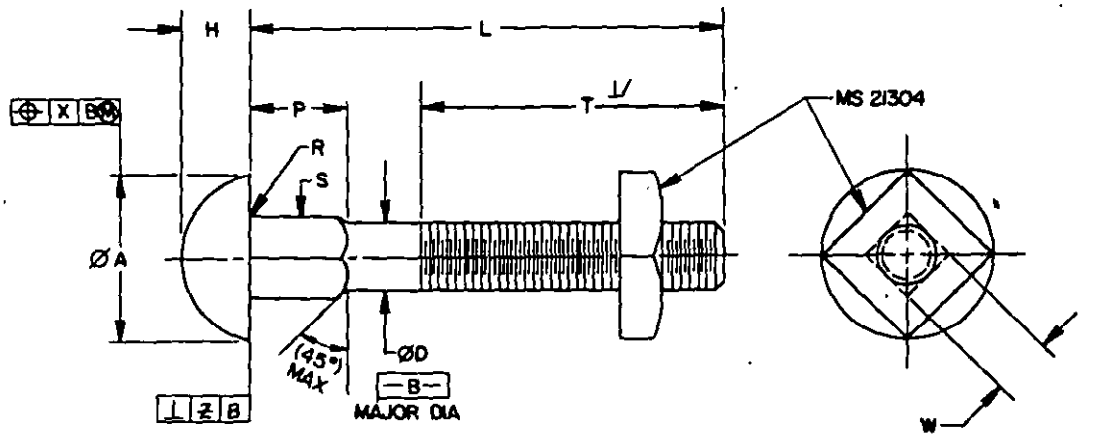


TABLE I DASH NUMBER AND DIMENSIONS

DASH NUMBER	ØD BOLT SIZE	L LENGTH	H HEAD HEIGHT	ØA HEAD	T THREAD LENGTH	P SQ NECK DEPTH	W WIDTH FLATS	R FILLET RAD	S CORNER RAD	X	Z
-1	.375-16 UNC-2A	4.000 +.040 -.060	.208 MAX .188 MIN	.844 MAX .782 MIN	1.750 MIN	.219 MAX .188 MIN	.388 MAX .368 MIN	.031 MAX .015 MIN	.047 MAX	.023	.026
-2	.375-16 UNC-2A	4.500 +.060 -.100	.208 MAX .188 MIN	.844 MAX .782 MIN	1.750 MIN	.219 MAX .188 MIN	.388 MAX .368 MIN	.031 MAX .015 MIN	.047 MAX	.023	.026
-3	.500-13 UNC-2A	4.500 +.080 -.100	.270 MAX .250 MIN	1.094 MAX 1.032 MIN	3.000 MIN	.281 MAX .250 MIN	.515 MAX .492 MIN	.031 MAX .015 MIN	.047 MAX	.030	.035

1/ THREAD LENGTH SHALL BE MEASURED FROM THE END OF BOLT TO LAST COMPLETE (FULL FORM) THREAD.

REQUIREMENTS:

1. MATERIAL : BOLTS SHALL BE STEEL GRADE 1020 OR 1025 IN ACCORDANCE WITH ASTM A576 (UNS G10200 OR G10250).
2. TENSILE STRENGTH : MINIMUM TENSILE STRENGTH SHALL BE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
3. PROTECTIVE COATING : BOLTS SHALL BE HOT-DIP GALVANIZED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
4. THREADS : SHALL BE UNIFIED COARSE SERIES CLASS 2A IN ACCORDANCE WITH FED-STD-H28/2. PRIOR TO COATING, ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21. AFTER COATING, THE THREADS SHALL BE IN SUCH CONDITION THAT NUTS CAN BE RUN THE ENTIRE LENGTH OF THE THREAD WITHOUT THE USE OF TOOLS.
5. FINISH : IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
6. MARKING : BOLTS SHALL BE MARKED WITH MS PART NUMBER AND MANUFACTURER'S SYMBOL OR OTHER MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130.
7. PART NUMBER : THE PART NUMBER SHALL CONSISTS OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS20069-1
- -1 — DASH NUMBER
- MS20069 — BASIC MS SHEET NUMBER

MS20069-1 INDICATES- BOLT, SQUARE NECK, CARRIAGE, HOT GALVANIZED, POLE LINE, .375-16UNC-2A, LENGTH, 4 INCHES.

8. UNLESS OTHERWISE SPECIFIED, EACH BOLT SHALL BE FURNISHED WITH NUT ASSEMBLED THERE-ON. NUTS SHALL CONFORM TO MS21304.
9. STRAIGHTNESS. BOLTS SHALL BE STRAIGHT WITHIN .006 PER INCH OF BOLT LENGTH.

Ⓑ ENTIRE STANDARD REVISED

P.A. ARMY-ER	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust NAVY-YD AIR FORCE-99		BOLT,SQUARE NECK,CARRIAGE, HOT GALVANIZED (POLE LINE)	MS20069
PROCUREMENT SPECIFICATION ANSI C135.1	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1127

APPROVED 18 JUL 58 REVISED Ⓑ 6 OCT 87

REVIEWER ACTIVITIES: CIVIL AGENCIES COORDINATING ACTIVITIES: USER ACTIVITIES:
ARMY-GL,ME GSA-FSS NAVY-MC
AIR FORCE-82 NASA-JFK NSA-NS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION, FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

APPROVED 18 JUL 58 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-ER Other Cust NAVY-YD AIR FORCE-99		BOLT, SQUARE NECK, CARRIAGE, HOT GALVANIZED (POLE LINE)	MS20069
PROCUREMENT SPECIFICATION ANSI C135.1	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1127

REVIEWER ACTIVITIES: DLA, MERCS (CONTRACTING ACTIVITIES): USER ACTIVITIES:
ARMY-GL, ME GSA-FSS NAVY-MC
AIR FORCE-82 NASA-JFK NSA-NS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:22Z
Check the source to verify that this is the current version before use.