
FED. SUP CLASS
6145

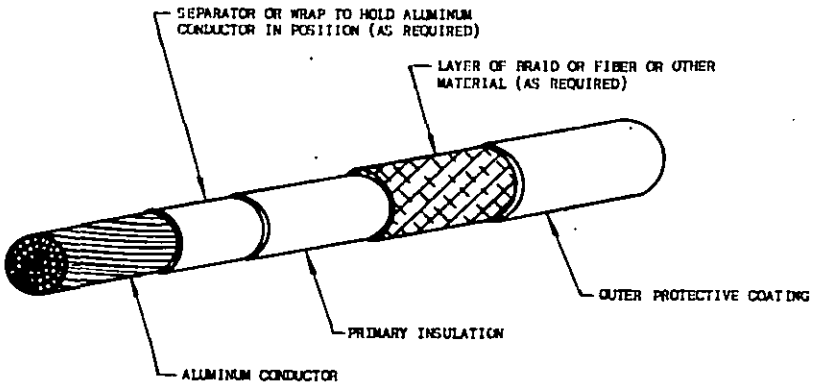


| DASH NO. | | WIRE SIZE | MAXIMUM RESISTANCE (OHMS/1,000 FT AT 20°C, 68°F) | DIAMETER STRANDED CONDUCTOR (INCHES) | | MAXIMUM DIAMETER FINISHED WIRE (INCHES) | MAXIMUM WEIGHT PER 1,000 FT FINISHED WIRE (POUNDS) |
|---|---|---|---|---|---|---|---|
| | | | | MIN | MAX | | |
| -8 | | AL-8 | 1.093 | 0.150 | 0.160 | .260 | 32 |
| -6 | | AL-6 | .641 | 0.199 | 0.211 | .325 | 55 |
| -4 | | AL-4 | .427 | 0.247 | 0.262 | .385 | 74 |
| -2 | | AL-2 | .268 | 0.310 | 0.330 | .465 | 107 |
| -1 | | AL-1 | .214 | 0.348 | 0.368 | .515 | 133 |
| -01 | | AL-0 | .169 | 0.398 | 0.418 | .570 | 167 |
| -02 | | AL-00 | .133 | 0.453 | 0.478 | .630 | 203 |
| -03 | | AL-000 | .109 | 0.510 | 0.535 | .705 | 242 |
| -04 | | AL-0000 | .085 | 0.562 | 0.587 | .775 | 296 |

INACTIVE FOR NEW DESIGN

(B) INACTIVE FOR DESIGN AFTER 4 OCTOBER 1962. USE SHEET 2.

(3) SHEET 2 ADDED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 17 Jun 58 REVISED (A) 19 Oct 59 (B) 4 Oct 62


| | | |
|---|---|---|
| P.A. Navy - Wep<br>Other Cust<br>USAF - AFSC | TITLE<br>WIRE, ELECTRIC, 600-VOLT, ALUMINUM, AIRCRAFT | MILITARY STANDARD<br>MS25191 (ASG) |
| PROCUREMENT SPECIFICATION<br>MIL-W-7072 | SUPERSEDES: NAFACT 1344 | SHEET 1 OF 2 |

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTICE — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the Navy (Bureau), and by the Department of the USAF, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.

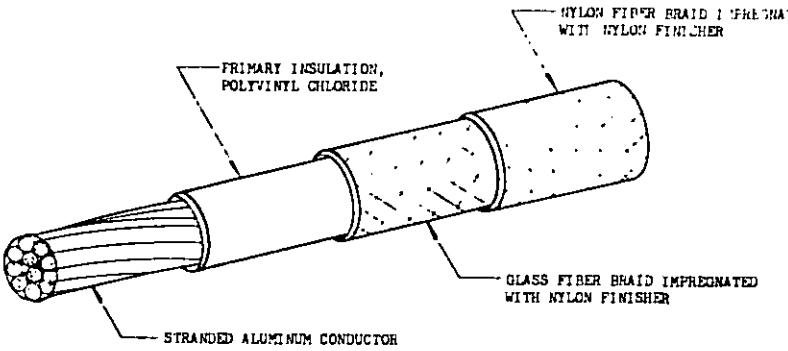


PERFORMANCE DETAILS

| DASH NO. | ABRASION TEST | | | | FLAWS TEST | | BEND TEST | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | RESISTANCE INCHES OF TAPE MIN | TENSION LOAD POUNDS | WEIGHT SUPPORT BRACKET | WEIGHT POUNDS | MIN AC VOLTAGE 60 CYCLE RMS | | MANDREL DIA INCHES MAX | | TEST LOAD POUNDS | |
| | | | | | PRIMARY INSULATION | FINISHED WIRE | LIFE CYCLE | COLD BEND | LIFE CYCLE | COLD BEND |
| -8B | 25 | 1 | B | 3 | 3000 | 5000 | 10 | 6 | 3 | 5 |
| -6B | | | C | 4.25 | 4000 | | | 10 | 6 | 10 |
| -4B | 33 | | | | | | | | | 15 |
| -2B | 34 | 2 | | | | | | 18 | | |
| -1B | 35 | | | | | | | | | |
| -01B | 48 | | | | | | | | 10 | 20 |
| -02B | | | | | | | | | | 25 |
| -03B | | | | | | | | | | 30 |
| -04B | | | | | | | | | | |

| DASH NO. | FINISHED WIRE CONSTRUCTION | | | | | | SUPERSEDING |
|---|---|---|---|---|---|---|---|
| | WIRE SIZE | STRANDING | MAX DIA OF STRANDED CONDUCTOR | MAX RESISTANCE AT 20°C(68°F) OHMS/1000 FT | MAX DIA FINISHED WIRE (INCHES) | MAX WEIGHT LB/1000 FT FINISHED WIRE | |
| -8B | 8 | 41x24 | .160 | 1.093 | .225 ±.007 | 31 | -8 |
| -6B | 6 | 7x10x24 | .211 | .641 | .285 | 50 | -6 |
| -4B | 4 | 7x15x24 | .262 | .427 | .340 ±.010 | 72 | -4 |
| -2B | 2 | 7x24x24 | .330 | .268 | .410 | 103 | -2 |
| -1B | 1 | 7x30x24 | .368 | .214 | .455 | 125 | -1 |
| -01B | 0 | 19x14x24 | .418 | .169 | .510 ±.015 | 160 | -01 |
| -02B | 00 | 19x18x24 | .478 | .133 | .580 | 195 | -02 |
| -03B | 000 | 19x22x24 | .535 | .109 | .640 | 240 | -03 |
| -04B | 0000 | 19x28x24 | .587 | .085 | .700 | 305 | -04 |

THE MS PART NUMBER SHALL CONSIST OF THE MS NUMBER PLUS THE DASH NUMBER.

EXAMPLE OF PART NUMBER: MS25191-01B = WIRE, ELECTRIC, 600 VOLTS, AIRCRAFT, ALUMINUM, WIRE SIZE 0.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the U.S. Navy (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 4 Oct 62 REVISED

| | | |
|---|---|---|
| P.A. Navy - Wep<br>Other Cust<br>USAF - AFSC | TITLE<br>WIRE, ELECTRIC, 600 VOLT, ALUMINUM, AIRCRAFT | MILITARY STANDARD<br>MS25191(ASG) |
| PROCUREMENT SPECIFICATION<br>MIL-W-7072 | SUPERSEDES | SHEET 2 OF |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:05Z
Check the source to verify that this is the current version before use.