


FED. SUP CLASS
4730

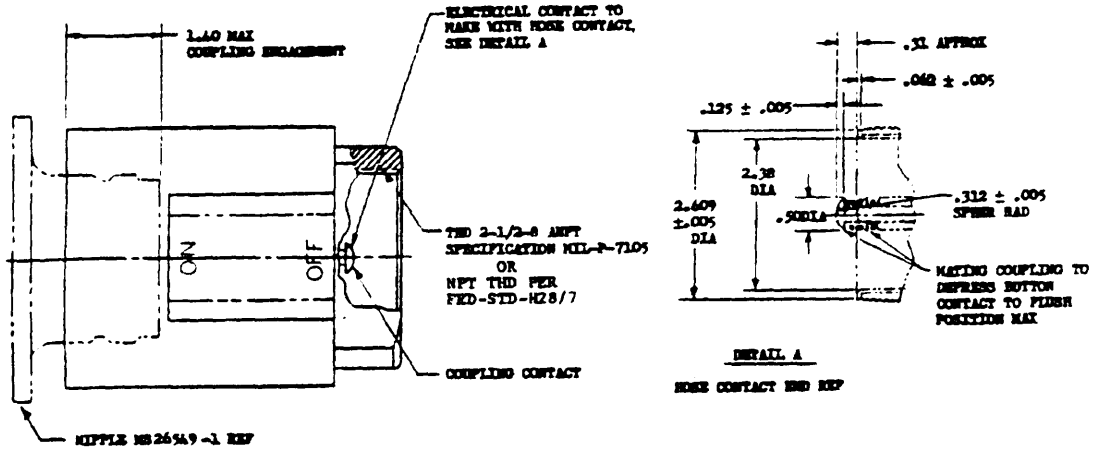

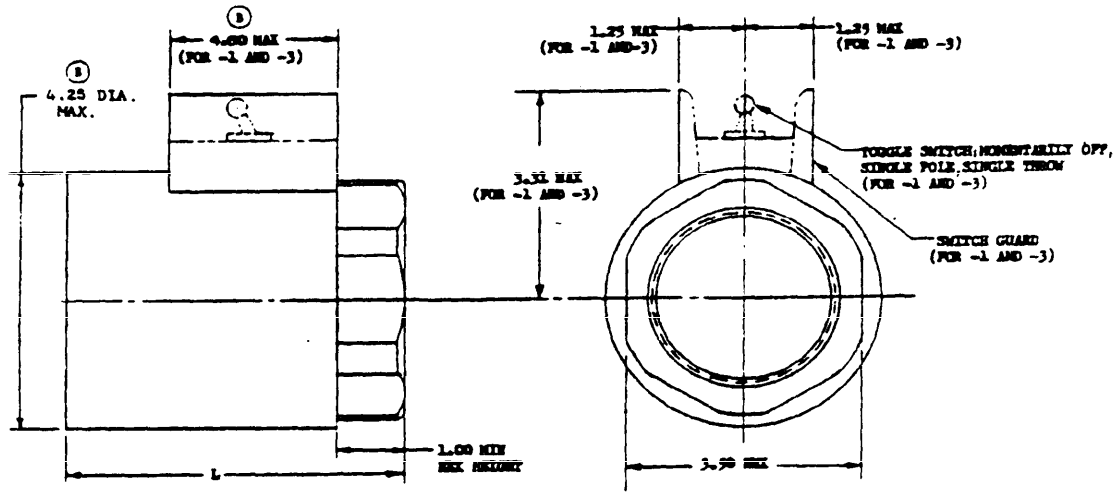

MS PART NO.	FIGR	DESCRIPTION	L MAX
MS26550 -1		AL ALLOY BODY, WITH SWITCH	5.00
MS26550 -2		AL ALLOY BODY, WITHOUT SWITCH	3.50
MS26550 -3		BRONZE BODY, WITH SWITCH	5.00
MS26550 -4		BRONZE BODY, WITHOUT SWITCH	3.50

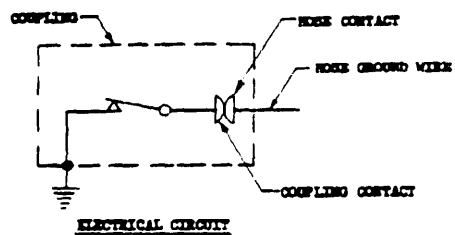

ELECTRICAL CIRCUIT

NOTES:
1. DIMENSIONS ARE IN INCHES.
2. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ±.02.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(B) DENOTES CHANGES

APPROVED 17 MARCH 1958 REVISED (A) 20 NOV 81 (B) 29 OCT 86

This military standard is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

AMSC N/A

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

P.A. NAVY-SH Other Cust	INTERNATIONAL INTEREST	TITLE: COUPLING, QUICK DISCONNECT, 2-1/2 INCH PRESSURE FUEL SERVICING, NOZZLE TO HOSE	MILITARY STANDARD MS26550(SH)
PROCUREMENT SPECIFICATION MIL-C-19179		SUPERSEDES:	SHEET 1 OF

DD FORM 672-1 (LIMITED COORDINATION) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NO 4730-N802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:12Z
Check the source to verify that this is the current version before use.