
FED. SUP CLASS
66GP

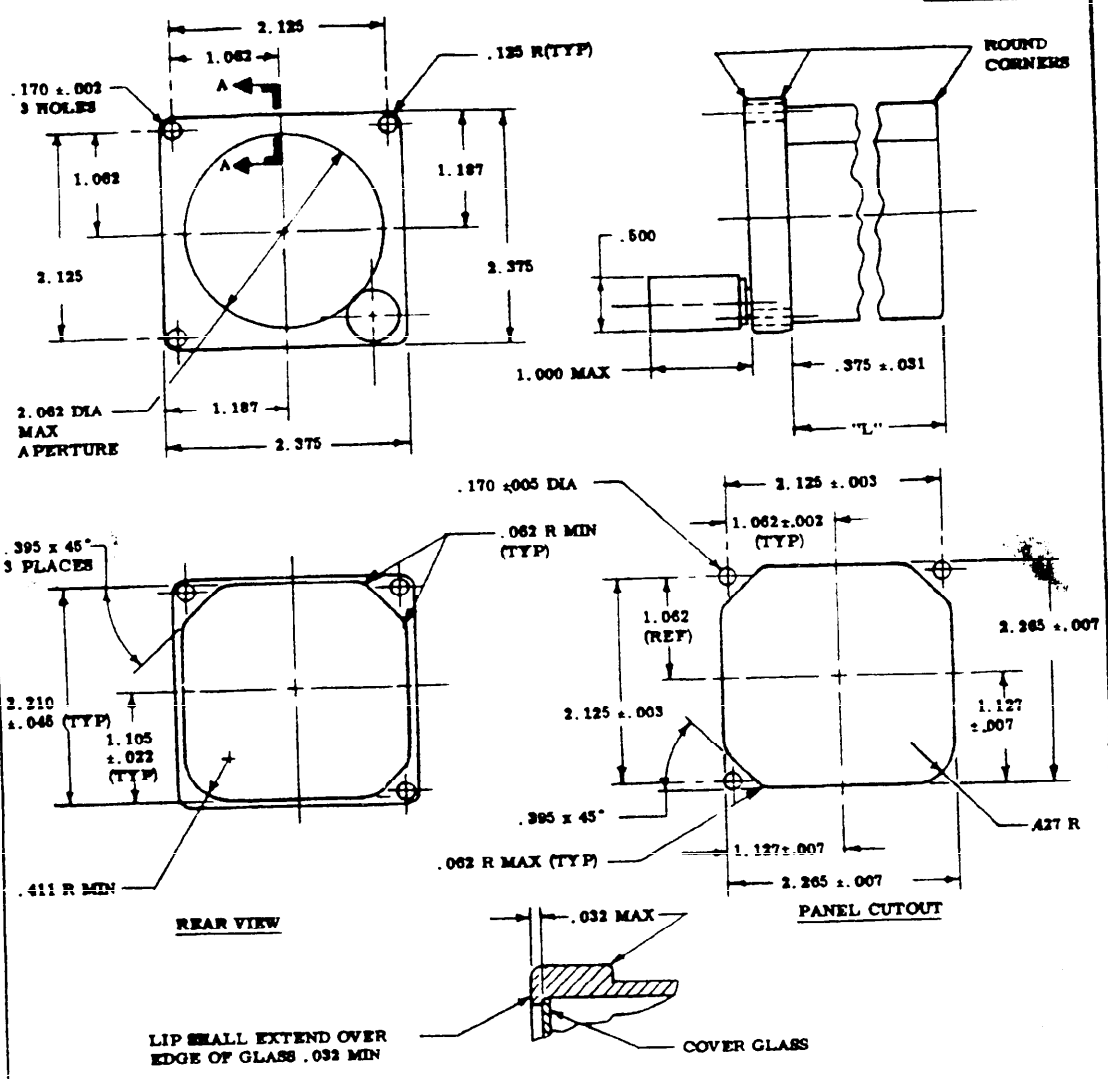

NOTES:

1. FRONT AND REAR MOUNTING FACES SHALL BE FLAT WITHIN .005.
2. FOR LENGTH "L" SEE DETAIL INSTRUMENT SPECIFICATION.
3. THE ORDER OF PREFERENCE FOR ADJUSTING KNOB OR SCREW LOCATIONS ARE AS FOLLOWS: LOWER RIGHT HAND, LOWER LEFT HAND, AND UPPER RIGHT HAND.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1/2°.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

(A) ENTIRE STANDARD REVISED AND REDRAWN.

P.A. AIR FORCE - 11 Other Cust NAVY - AS ARMY - AV	TITLE 2-3/8 SQUARE INSTRUMENT CASE STANDARD DIMENSIONS FOR	MILITARY STANDARD MS27560
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

PLATE NO. 15320

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 9 DEC 1966 REVISED (A) 18 JAN 1968

USER SYMBOLS:

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T16:43Z
Check the source to verify that this is the current version before use.