

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-8914

Form Approved
OMB No. 0704-0188

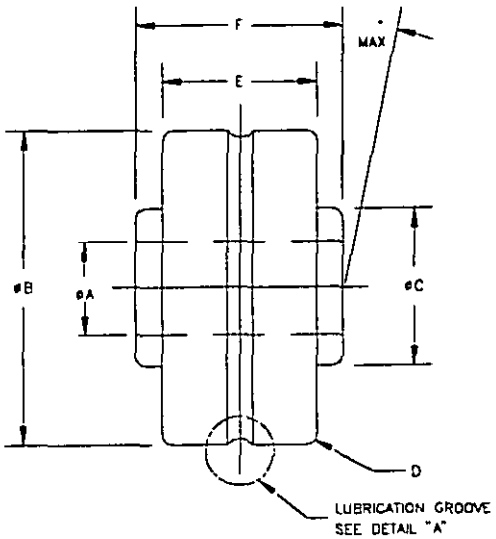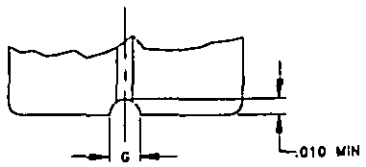


(E) DETAIL "A"

| MS DASH NO. | G GROOVE WIDTH MIN | | LUBRICATION HOLE DIA | |
|---|---|---|---|---|
| | IN. | (mm) | IN. | (mm) |
| -4C | .063 | (1.575) | .038 | 1.065 |
| -5C | .078 | (1.981) | | (1.1941) |
| -6C | | | .035 | 1.307 |
| -8C | | | | |
| -10C | | | | |
| -12C | | | | |

| MS DASH NO. | øA +.0000 (.000) -.0005 (.013) BORE | | øB -.0000 (.000) -.0005 (.013) O.D. 1/ | | øC +.005 (.127) -.005 (.127) DIA | D +.015 (.381) -.000 (.000) RAD. | | E +.000 (.000) -.005 (.127) WIDTH OUTER RING | | F +.000 (.000) -.005 (.127) WIDTH INNER RING | | STATIC LIMIT LOAD-POUNDS | | WT. MAX. LBS. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | IN. | (mm) | IN. | (mm) | IN. (mm) | IN. | (mm) | IN. | (mm) | IN. | (mm) | RADIAL | AXIAL | |
| -4C | .2500 | (6.350) | .9014 | (22.896) | .390 (9.500) | .032 | (.813) | .464 | (11.780) | .625 | (15.880) | 3025 | 910 | .04 |
| -5C | .3125 | (7.938) | 1.2500 | (31.750) | .515 (13.080) | | | .656 | (16.660) | .812 | (20.620) | 7350 | 2210 | .17 |
| -6C | .3750 | (9.525) | 1.4375 | (36.512) | .550 (13.970) | | | .750 | (19.050) | .937 | (23.800) | 9600 | 23.80 | .26 |
| -8C | .5000 | (12.700) | 1.6875 | (42.862) | .775 (19.680) | .050 | (1.118) | .812 | (20.620) | 1.000 | (25.400) | 12500 | 3750 | .34 |
| -10C | .6250 | (15.875) | 1.9375 | (49.212) | .869 (22.070) | | | .937 | (23.800) | 1.125 | (28.580) | 17700 | 5310 | .60 |
| -12C | .7500 | (19.050) | 2.3750 | (60.325) | 1.090 (27.690) | | | 1.125 | (28.580) | 1.312 | (33.320) | 26900 | 8070 | 1.04 |

| BASIC (NOMINAL) DIAMETER | | BEARING ROUNDNESS LIMITS | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | BORE ACCEPTANCE LIMITS | | | | O.D. ACCEPTANCE LIMITS | | | |
| | | | MEAN DIAMETER | | | | MEAN DIAMETER | | |
| OVER | INCL | d MIN | LOW | HIGH | d MAX | D MIN | LOW | HIGH | D MAX |
| .0000(.000) | 2.0000(50.800) | -.0006(.015) | -.0005(.013) | +.0000(.000) | +.0001(.002) | -.0008(.020) | -.0005(.013) | +.0000(.000) | +.0003(.008) |
| 2.0000(50.800) | 4.0000(101.600) | -.0009(.023) | -.0007(.018) | +.0000(.000) | +.0002(.005) | -.0012(.030) | -.0007(.018) | +.0000(.000) | +.0005(.013) |

1/ TOLERANCE ON -12 O.D. +.0000 (.000) TO -.0007 (.018)

(E) DENOTES CHANGES

INCH-POUND

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-AT NAVY-AS
AIR FORCE-99 DLA-
REVIEW: ARMY-AV,ME,MI AF-84 DLA-IS
USER: NAVY-MC,CG
PROJECT NUMBER: 3110-0911

MILITARY SPECIFICATION SHEET

TITLE

BEARING, ROLLER, SELF-ALIGNING, SINGLE ROW AIRFRAME, ANTI-FRICTION, SEALED, TYPE I

SPECIFICATION SHEET NUMBER
MS28912 05 DEC 94 REV E

SUPERSEDING
MS28912 D 15 NOV 1973

AMSC- N/A FSC 3110

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.



DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-8914

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

REQUIREMENTS:

1. MATERIAL: RETAINERS: STEEL, MIL-S-5628, COPPER, BERYLLIUM PER QQ-C-390.
   RINGS AND ROLLERS: STEEL, MIL-S-7420 PER FED-STD-66.
(E) 2. LUBRICANT: MIL-G-81322 OR MIL-G-23827. ALL BEARINGS SHALL BE PACKED WITH GREASE CONFORMING TO MIL-G-81322 UNLESS OTHERWISE SPECIFIED. ALL BEARINGS SHALL BE FILLED 80% MINIMUM WITH GREASE. IF MIL-G-23827 IS REQUIRED, ADD THE LETTER "G" AFTER THE MS PART NUMBER. GREASE MIL-G-23827 SHALL BE USED FOR OPERATION UP TO 250° F MAX.
3. INTERNAL CLEARANCE: TOTAL PLAY, RADIAL .0002 (.005) TO .0010 (.025).
(E) 4. FINISH: ZINC-NICKEL, AMS 2417, TYPE 2, OR CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE I, CLASS 2, TO A THICKNESS OF .0003 TO .0006 INCHES.
(E) 5. SURFACE ROUGHNESS: RACEWAYS 8 MICROINCHES Ra, ROLLERS 6 MICROINCHES Ra, IN ACCORDANCE WITH ANSI/ASME B46.1. ALL OTHER SURFACES 32 MICROINCHES Ra. REMOVE BURRS AND SHARP EDGES.
6. DIMENSIONS IN INCHES (MILLIMETERS) UNLESS OTHERWISE SPECIFIED.
7. TOLERANCES: DECIMALS +.010 (.250) TO -.000 (.000).
8. DIMENSIONS TO BE MET AFTER PLATING.

NOTES:
1. FOR DESIGN FEATURE PURPOSE, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

| | | |
|---|---|---|
| PREPARING ACTIVITY: NAVY-AS<br>CUSTODIANS: ARMY- AT NAVY- AS<br>AIR FORCE- 99 DLA-<br>REVIEW: ARMY-AV,ME,MI AF-84, DLA-IS<br>USER: NAVY-MC,CG<br>PROJECT NUMBER: 3110-0911 | MILITARY SPECIFICATION SHEET<br>TITLE<br>BEARING, ROLLER, SELF-ALIGNING, SINGLE ROW AIRFRAME, ANTI-FRICTION, SEALED, TYPE I | SPECIFICATION SHEET NUMBER<br>MS28912 05 DEC 94 REV E<br>SUPERSEDING<br>MS28912 D 13 NOV 1973<br>AMSC- N/A FSC -3110 |

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.



DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:00Z
Check the source to verify that this is the current version before use.