
Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specification, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


F DIA, 4 HOLES, SHALL FIT A MATING PART HAVING A PILOT DIA W AND 4 STUDS, EACH WITHIN AN AREA HAVING X DIA CENTRALLY LOCATED ON ITS BASIC POSITION

SURFACE SHALL BE FLAT AND SQUARE WITH AXIS OF ROTATION WITHIN .002 FIR PER INCH OF DIA, FLANGE AND SHAFT RELATIVELY ROTATING

FED. SUP CLASS. 1500


SURFACE OF SHAFT EXTENTION TO BE CONCENTRIC WITH AXIS OF ROTATION WITHIN .001 FIR, FLANGE AND SHAFT RELATIVELY ROTATING

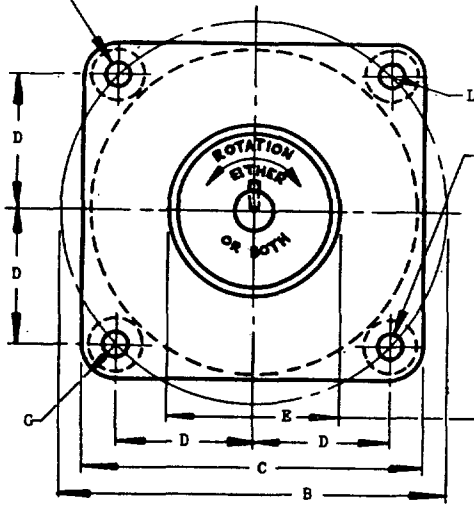

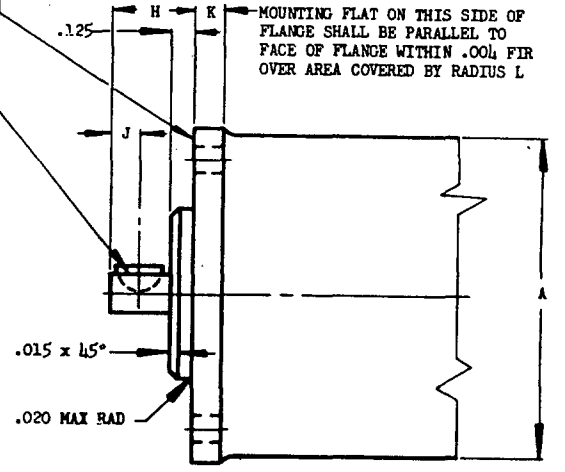

MOUNTING FLAT ON THIS SIDE OF FLANGE SHALL BE PARALLEL TO FACE OF FLANGE WITHIN .004 FIR OVER AREA COVERED BY RADIUS L

PILOT DIA E TO BE CONCENTRIC WITH AXIS OF ROTATION WITHIN .003 FIR, FLANGE AND SHAFT RELATIVELY ROTATING



SHAFT AND KEY DETAIL

TYPE	A MAX DIA (a)	B DIA REF	C REF	D BASIC	E +.000 -.002 DIA	F +.015 -.005 DIA	G +.000 -.030 RAD	H ±.040	J	K MAX	K MIN	L MIN RAD	M ±.0050	N +.0000 -.0005 DIA	W ±.0001 DIA
IA	2.030	2.406	2.000	.850	.999	.161	.150	.469	—	.172	.086	.190	—	.1562	.9995
IIA	2.532	3.000	2.500	1.060	1.499	.191	.187	.750	.375	.370	.185	.200	.2772	.2500	1.4995
III	3.170	4.000	3.578	1.414	2.874	.344	.375	.938	.469			.400	.3405	.3125	2.8745
IV	4.045	5.000	4.286	1.767	3.249			1.125	.562				.4036	.3750	3.2495

TYPE	X ±.0001 DIA	NOMINAL KEY SIZE REF	KEY NO.
IA	.1522	--	--
IIA	.1791	.062 x .250	(b)
III	.3310	.062 x .500	AN280-204
IV			

(a) A IS GREATEST DIAMETER OR DIMENSION OF ACCESSORY EXCLUSIVE OF ATTACHED DEVICES.

(b) OBTAINABLE COMMERCIALLY.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

NOMINAL USE OF THIS DRIVE FOR AC OR DC ELECTRICAL MOTORS.

(A) INACTIVE 1 JAN 1977 FOR NEW DESIGN SEE SAE STANDARDS AS959 THRU AS972, AS976 AND AS977. (CONTINUED APPLICATION OF THIS STANDARD ON CONTRACTS IN EFFECT PRIOR TO 1 JAN 1977 IS PERMISSIBLE).

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

THIS IS A DESIGN STANDARD, NOT TO BE USED AS A PART NUMBER.

APPROVED 30 Nov 55 REVISED (A) 26 NOV 1976

CUSTODIANS	OTHER INT.
Navy - AS Air Force 99	A - N - AF -

MILITARY STANDARD

DRIVE, SQUARE MOUNTING FLANGE WITH ROUND SHAFT AND KEY

MS33570 (ASG)

PROCUREMENT SPECIFICATION NONE

SUPERSEDES: AND10456

SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:05Z
Check the source to verify that this is the current version before use.