
FED. SUP CLASS
5315

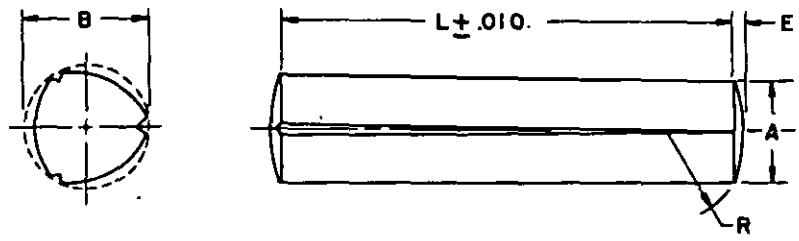

NOMINAL SIZE		3/64	1/16	5/64	3/32	1/8
A DIAMETER	MAX MIN	.0469 .0459	.0625 .0615	.0781 .0771	.0938 .0928	.1250 .1230
E *CROWN HEIGHT	REF	----	.0065	.0087	.0091	.0130
R RADIUS	MAX MIN	---- ----	.0881 .0681	.1037 .0837	.1350 .1150	.1662 .1462
RECOMMENDED HOLE SIZE	MAX MIN	.0478 .0465	.0640 .0625	.0798 .0781	.0956 .0938	.1271 .1250
SINGLE SHEAR STRENGTH - LBS	MIN	110	200	310	440	790

L LENGTH	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.002
3/16	1	.051								
1/4	2	.051	6	.068	11	.084				
3/8	3	.051	7	.068	12	.084	16	.101	21	.134
1/2	4	.051	8	.068	13	.084	17	.101	22	.134
5/8	5	.051	9	.068	14	.084	18	.101	23	.134
3/4			10	.068	15	.084	19	.101	24	.134
1							20	.101	25	.133
1-1/4									26	.132
1-1/2									27	.132

For additional sizes see sheet 2.

MATERIAL: Steel, cold-drawn, B1112 or 1212, in accordance with the procurement specification.
PROTECTIVE COATING: Cadmium plate in accordance with the procurement specification.
APPLICATION: Grooved pins are locked securely in place by elastic deformation eliminating the need for tapping or reaming of tapered or sized holes.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS35671-1.
NOTES: (1) Dash numbers for cadmium plated pins as shown on this revised standard are the same as the dash numbers for the cadmium or zinc plated (optional) pins shown on the original standard.
(2) Diameter "B" is the expanded diameter as measured with a ring gage.
*(3) Ends of pins may be square with .01-inch to .02-inch radius on the edges.
(4) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(5) Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ ENTIRE STANDARD REVISED

P.A. WC Other Cust WP 69	TITLE PIN, GROOVED, HEADLESS-LONGITUDINAL TAPER GROOVE, CARBON STEEL	MILITARY STANDARD MS35671
PROCUREMENT SPECIFICATION MIL-P-20700	SUPERSEDES: BFCX3, BFCX3.1, BFCX3.2 and in part AFGX2	SHEET 1 OF 2

DD FORM 672-1 (Continued)

REVIEWER: MI, MO, MU, WC, SH, WP, 69, IS
USER: MC, YD, NSA

APPROVED 11 JAN 56 REVISED Ⓐ 17 MAR 1965

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.

NOMINAL SIZE		5/32	3/16	7/32	1/4	3/8
A DIAMETER	MAX	.1563	.1875	.2188	.2500	.3750
	MIN	.1543	.1855	.2168	.2480	.3730
E *CROWN HEIGHT	REF	.0170	.0180	.0220	.0260	.0390
R RADIUS	MAX	.1975	.2600	.2912	.3225	.4787
	MIN	.1775	.2400	.2712	.3025	.4587
RECOMMENDED HOLE SIZE	MAX	.1587	.1903	.2219	.2534	.3797
	MIN	.1563	.1875	.2188	.2500	.3750
SINGLE SHEAR STRENGTH - LBS	MIN	1230	1770	2400	3140	7070

L LENGTH	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002
1/2	28	.166	34	.198						
5/8	29	.166	35	.198			52	.263		
3/4	30	.166	36	.198	43	.230	53	.263	62	.394
1	31	.165	37	.198	44	.230	54	.263	63	.394
1-1/4	32	.164	38	.197	45	.230	55	.263	64	.394
1-1/2	33	.164	39	.197	46	.229	56	.262	65	.394
1-3/4			40	.197	47	.229	57	.262	66	.393
2			41	.196	48	.229	58	.262	67	.393
2-1/4			42	.196	49	.229	59	.262	68	.393
2-1/2					50	.228	60	.261	69	.393
2-3/4					51	.228	61	.261	70	.393

*See Note (3), sheet 1.
For illustration, material protective coating, and other pertinent data see sheet 1.

REVIEWER: MI,MO,MU,WC,SH,WP,69,IS
USER: MC,YD,NSA

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 11 JAN 56 REVISED (A) FOR CHANGES SEE SHEET 1.

P.A. WC
Other Cust WP 69

TITLE
PIN, GROOVED, HEADLESS-LONGITUDINAL TAPER GROOVE, CARBON STEEL

MILITARY STANDARD
MS35671

PROCUREMENT SPECIFICATION
MIL-P-20700

SUPERSEDES:
BFCX3, BFCX3.1, BFCX3.2 and in part AEGX2

SHEET 2 OF

DD FORM 1 SEP 57 672-1 (Continued)

Source: https://assist.dla.mil -- Downloaded: 2026-10-29T17:26Z
Check the source to verify that this is the current version before use.