

FED. SUP CLASS
2930

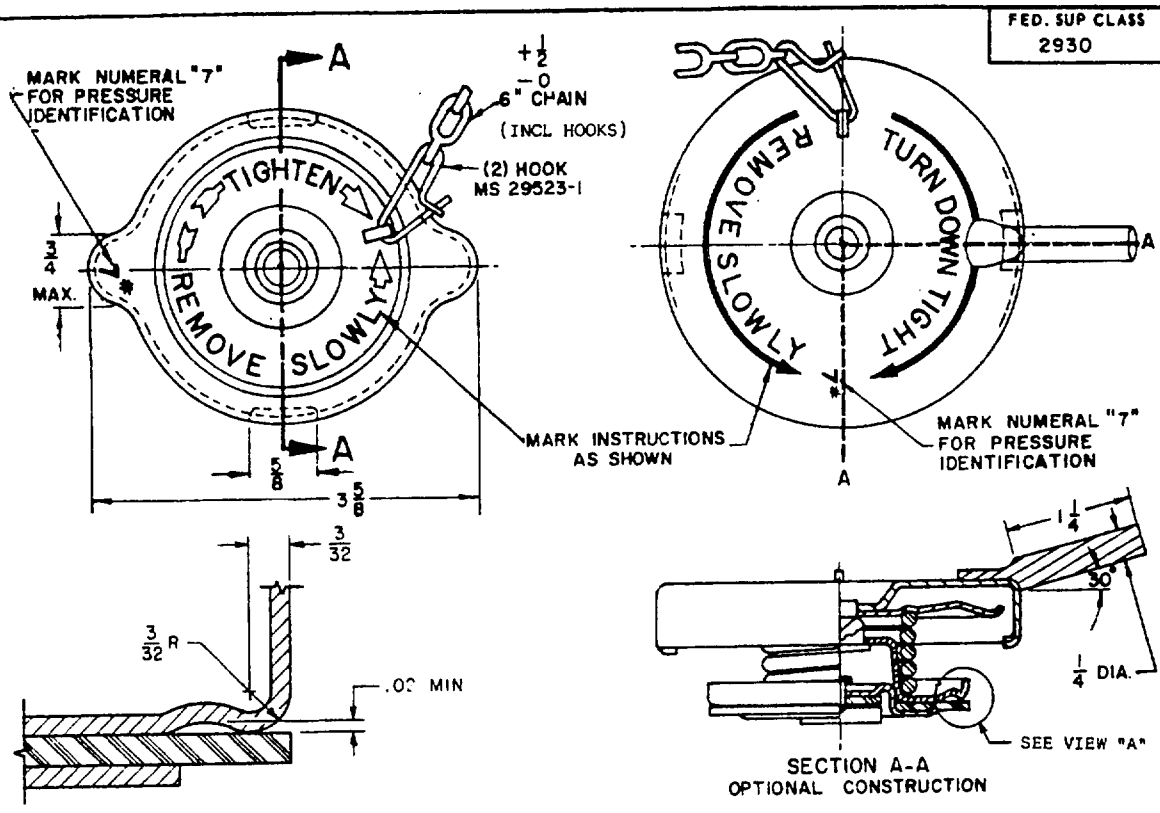

SECTION A-A
OPTIONAL CONSTRUCTION

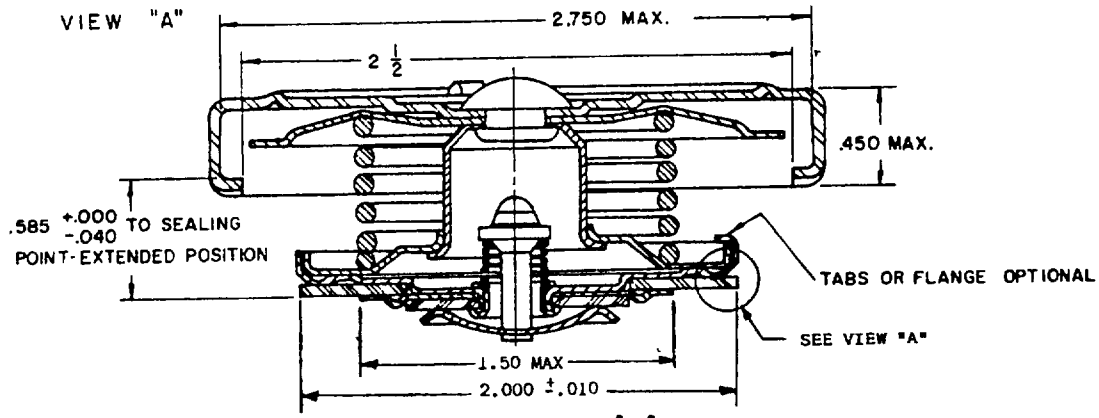

ENLARGED SECTION A-A

(D) NOTES:

1. CHAIN SHALL BE FABRICATED PER RR-C-271, TYPE II, CLASS 6, .028 THICK STEEL, ZINC COATED. OPTIONAL FINISH: CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 3. CHAIN SHALL HAVE APPROXIMATELY 20 LINKS PER FOOT.
2. THIS RADIATOR CAP IS INTENDED FOR USE WITH RADIATOR FILLER NECK MS35841-1.
3. BOTTOM PLATE SHALL ROTATE FREELY AFTER ASSEMBLY.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION FEATURES OTHER THAN SHOWN HEREIN BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER THE PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES; TOLERANCES ARE ± 1/64 ON FRACTIONS.

MS PART NO.
MS35840-1

REVIEW ACTIVITIES: DSA-CS
USER ACTIVITIES: ARMY-EL, ME; NAVY-MC

APPROVED 12 SEPT 1957 REVISED (A) 2 OCTOBER 1959 (B) 10 OCTOBER 1966 (C) 22 NOV 1972 (D) 21 JANUARY 1976

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cast AF-82 PROCUREMENT SPECIFICATION MIL-C-45167	CAP, FILLER OPENING: RADIATOR, 7PSI PRESSURE, 2 1/2 INCH SUPERSEDES:	MILITARY STANDARD MS35840 SHEET 1 OF 1

DD FORM SEP 67 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-020/5100

Downloaded from http://www.everyspec.com Downloaded: 2026-10-23T17:29Z
Check the source to verify that this is the current version before use.