

FED. SUP CLASS
2350-A351

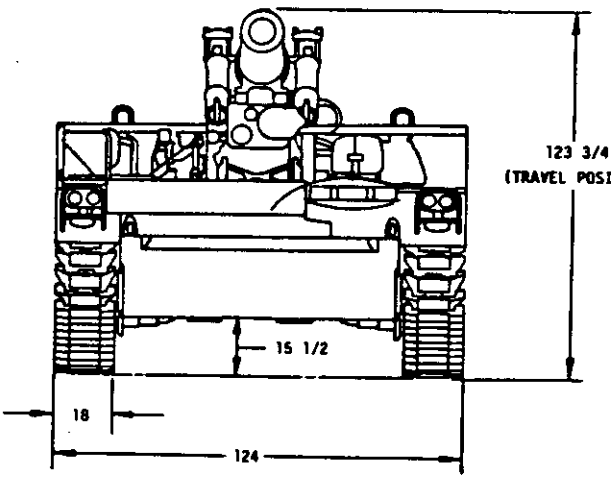

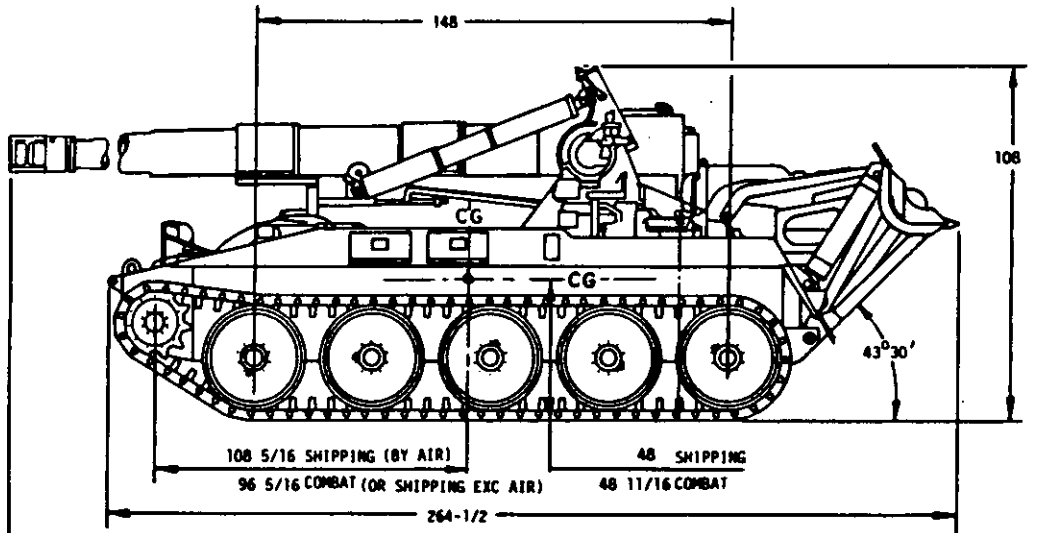

366 MAXIMUM RETRACTED-MINIMUM ELEVATION POSITION (SHOWN)
368 5/16 SHIPPING POSITION-MINIMUM ELEVATION
365 11/16 TRAVEL POSITION-IN BATTERY @ 8°15' ELEVATION
422 1/2 BATTERY POSITION-MINIMUM ELEVATION
(ALSO SHIPPING POSITION, EXC AIR TRANSPORT)

MS PART NO.	ENGINEERING DRAWING NO.
MS52270 -1	8736973

APPROVED 18 FEB 86 REVISED

P. A. ARMY-AT Other Cost	INTERNATIONAL INTEREST	TITLE HOWITZER, SELF—PROPELLED 8 INCH, M110A2	MILITARY STANDARD MS52270(AT)
PROCUREMENT SPECIFICATION MIL-G-45397	SUPERSEDES:		SHEET 1 OF 2

DD FORM 672-1 LIMITED COORDINATION

*PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

2350-A351

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:24Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Depart... nd Agencies of the Department of Defense. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

VEHICLE CHARACTERISTICS

WEIGHT:

COMBAT LOADED (APPROX)	62,500 LBS
5 MAN CREW	
LESS CREW, STOWAGE AND FUEL	56,200 LBS
GROUND PRESSURE	11.6 LBS/SQ IN

VISION AND FIRE CONTROL EQUIPMENT:

3 PERISCOPES, DRIVER'S	M17
TELESCOPE, PANORAMIC	M115
TELESCOPE, DIRECT FIRE M116, M116C,	M139
QUADRANT, GUNNER'S	M1A1
QUADRANT, ELEVATION	M15
BINOCULAR	M17A1
SETTER, FUSE	M26
SETTER, FUSE	M27

ARMAMENT:

HOWITZER, 8 INCH	M201A1
MOUNT	M174
RECOIL MECHANISM, HYDRO-PNEUMATIC	
TRAVERSE, RIGHT	30°
LEFT	30°
RATE	107 MILS/SEC
POWER, HYD; MANUAL, GEAR TRAIN	
ELEVATION	2° MIN TO 65° MAX
RATE	18 MILS/SEC
EQUILIBRATION SYSTEM, PNEUMATIC	

ARMAMENT, SECONDARY:

RIFLE, 5.56MM	M16A1

AMMUNITION:

8 INCH HOWITZER	2 ROUNDS
5.56MM, RIFLE	750 ROUNDS
GRENADES, HAND	8

RUNNING GEAR:

SUSPENSION TYPE, FLAT TRACK, INDIVIDUAL TORSION BAR, LOCK OUT	
5 DUALS, EA SIDE, DISC TYPE	
TIRES, 10 DUALS, SOLID RUBBER 32½ X 3½IN	
TRACK, SINGLE PIN, REPLACEABLE RUBBER PAD	
SHOES/TRACK	75-76
PITCH	6 IN
WIDTH	18 IN

ELECTRICAL SYSTEM:

NOMINAL VOLTAGE	24 VOLTS
GENERATOR, MAIN - 300 AMP	11642898
GENERATOR, AUXILLIARY	NONE
4 BATTERIES, 6TN, 12V 100 AMP HRS	MS35000

COMMUNICATIONS:

INTERPHONE,	AN/VIC-1 OR AN/VIC-1(V)
EXTERNAL INTERPHONE, EXT KIT	CE-11 W/DR8

ENGINE:

8 CYL, TURBOCHARGED 2 CYCLE DIESEL	
DISPLACEMENT	568 CU IN
BORE 4.25 IN, STROKE 5.00 IN	
GOVERNED SPEED	2300 RPM
COMPRESSION RATIO	17:1
MAX GROSS HORSEPOWER	405 @ 2300 RPM
MAX NET HORSEPOWER	345 @ 2300 RPM
MAX GROSS TORQUE	1058 LB/FT @ 1400 RPM
MAX NET TORQUE	888 LB/FT @ 1611 RPM
MAIN COOLING SYSTEM	LIQUID
OIL COOLING SYSTME	LIQUID
FUEL CAP	260 GALS
CRANKCASE, INITIAL CAPACITY	38 QTS
REFILL CAPACITY	28 QTS

POWER TRAIN:

CROSS DRIVE TRANSMISSION	XTG-411-2A
4 SPEEDS FORWARD, 2 REVERSE	
HYD CONVERTER, SINGLE STAGE	
STALL MULTIPLICATION	3.3:1
MECH RATIOS; 1ST, 4.69:1; 2ND, 3.18:1, 3RD, 1.59:1, 4TH, 0.794:1; REV 1, 5.60:1, REV 2, 3.79:1	
TURNING RADIUS, SKID TURN TO INFINITY	
STEERING SYSTEM, 1ST, 2ND & REV 1, CLUTCH BRAKE, 3RD, 4TH & REV 2, GEARED STEER - (RATIO) 1.475:1	
STEERING CONTROL, MECH STEERING WHEEL	
BRAKES, MULTIPLE WET PLATE, MECH	
OIL SYSTEM COOLING, HEAT EXCHANGER DISSIPATES TO ENGINE COOLING SYSTEM	LIQUID
TRANSMISSION, INTITIAL, CAP	19 GALS
REFILL, CAP	12 GALS
OUTPUT DRIVE, RIGHT, CAP	7 QTS
LEFT, CAP	13 QTS

FINAL REDUCTION:

PLANETARY, RATIO	5.35:1; 5.5 FT/REV
SPROCKET, 11 TEETH, PITCH DIA	21.418 IN

FIRE EXTINGUISHERS:

FIXED, TWO 10 LB CO_2	7714476
PORTABLE, ONE 5 LB CO_2	7714780

PERFORMANCE:

GROSS HORSEPOWER TO WEIGHT RATIO	13:1 HP/TON
MAX TRACTIVE EFFORT, 50,000 LBS	TE/W 80%
MAX SPEED	34 MPH
MAX GRADE	60°
MAX TRENCH CROSSING WIDTH	75 IN
MAX VERTICAL WALL	40 IN
MAX FORDING DEPTH	42 IN
CRUISING RANGE	325 MI

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000.

APPROVED 18 FEB 86 REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52270 -1	8736973

P. A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-AT Other Cost		HOWITZER, SELF-PROPELLED 8 INCH, M110A2	MS52270(AT)
PROCUREMENT SPECIFICATION MIL-G-45397	SUPERSEDES		SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:24Z
Check the source to verify that this is the current version before use.