MS9025

FED. SUP CLASS
5340

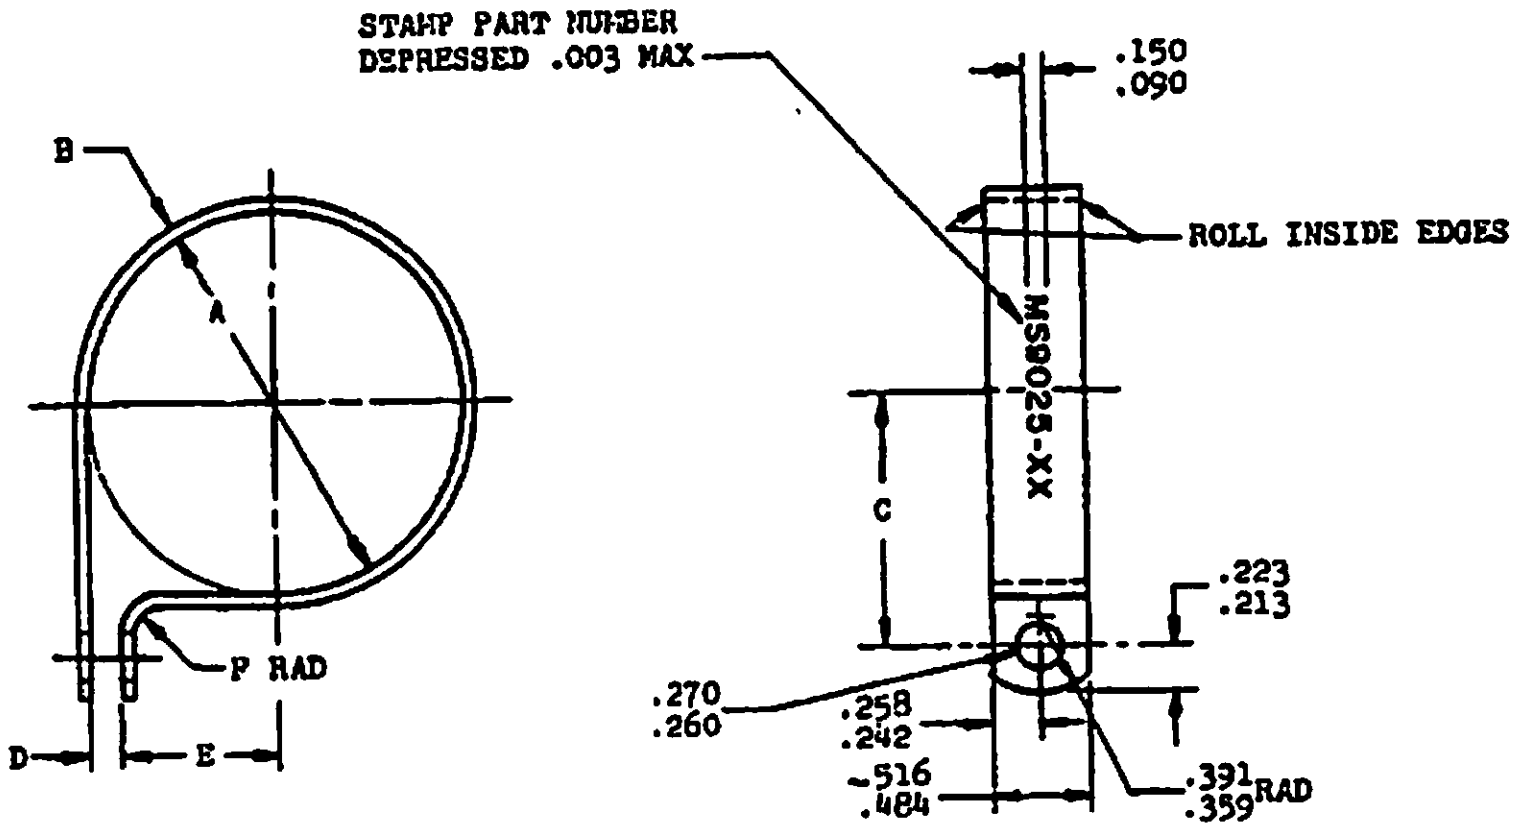

PART NO.	FIIN	NOM TUBE OD	A DIA BASIC	B ±.005	C ±.010 Ⓐ	D	E REF	F RAD ±.016	APPROX WEIGHT LBS. EA.
MS9025-01		.125	.125	.031	.360	.062-.078	0	.062	.0055
MS9025-02		.188	.188	.031	.423	.062-.078	.031	.062	.0066
MS9025-03		.250	.250	.031	.457	.062-.078	.062	.062	.0075
MS9025-04		.312	.312	.031	.498	.062-.078	.094	.062	.0085
MS9025-05		.375	.375	.031	.529	.062-.078	.125	.062	.0094
MS9025-06		.438	.438	.031	.560	.062-.078	.156	.062	.0103
MS9025-07		.500	.500	.031	.592	.062-.078	.188	.062	.0112
MS9025-08		.562	.562	.031	.623	.062-.078	.219	.062	.0122
MS9025-09		.625	.625	.031	.654	.062-.078	.250	.062	.0131
MS9025-10		.688	.688	.051	.752	.062-.078	.281	.109	.0237
MS9025-11		.750	.750	.051	.783	.062-.078	.312	.109	.0252
MS9025-12		.812	.812	.051	.814	.062-.078	.344	.109	.0267
MS9025-13		.875	.875	.051	.845	.062-.078	.375	.109	.0283
MS9025-14		.938	.938	.051	.877	.062-.078	.406	.109	.0298
MS9025-15		1.000	1.000	.051	.908	.062-.078	.438	.109	.0313
MS9025-16		1.062	1.062	.051	.939	.062-.078	.469	.109	.0331
MS9025-17		1.125	1.125	.051	.970	.062-.078	.500	.109	.0343
MS9025-18		1.188	1.188	.051	1.002	.062-.078	.531	.109	.0359
MS9025-19		1.250	1.250	.064	1.062	.094-.110	.531	.125	.0471
MS9025-20		1.312	1.312	.064	1.093	.094-.110	.562	.125	.0490
MS9025-21		1.375	1.375	.064	1.125	.094-.110	.594	.125	.0509
MS9025-22		1.438	1.438	.064	1.156	.094-.110	.625	.125	.0528
MS9025-23		1.500	1.500	.064	1.188	.094-.110	.656	.125	.0547
MS9025-24		1.562	1.562	.064	1.219	.094-.110	.688	.125	.0566
MS9025-25		1.625	1.625	.064	1.250	.094-.110	.719	.125	.0585
MS9025-26		1.750	1.750	.064	1.312	.094-.125	.781	.125	.0623
MS9025-27		1.875	1.875	.064	1.375	.094 .125	.844	.125	.0661
MS9025-28		2.000	2.000	.064	1.438	.094-.125	.906	.125	.0696

MATERIAL: CORROSION RESISTANT STEEL AMS5510.
REMOVE BURRS AND SHARP EDGES.
DIMENSIONS IN INCHES.
CLAMP SHALL BE FORMED AS SHOWN. DIMENSION "D" SHALL FALL WITHIN THE SPECIFIED LIMITS WHEN CLAMP IS ASSEMBLED ON A BAR THE DIA OF WHICH IS EQUAL TO THE NOMINAL TUBE OD WITHIN ±.001.
HOLES SHALL BE IN ALIGNMENT WITHIN .010 AND CLAMP SHALL BE FLAT WITHIN .010 THRU CLAMP WIDTH WHEN ASSEMBLED ON TEST BAR. IN THE FREE POSITION CLAMP MAY SPRING OPEN PROVIDED THE ABOVE CONDITIONS ARE MET.

DO NOT USE UNASSIGNED PART NUMBERS.

AMS IS A SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATION.
Ⓐ THIS MILITARY STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 10 May 56 REVISED Ⓐ 15 May 68

CUSTODIAN P&A, USAF - 11 Navy - AS Army - AV	MILITARY STANDARD	MS9025
PROCUREMENT SPECIFICATION None	CLAMP - LOOP TYPE SUPPORT (HEAT RESISTANT) .265 HOLE	SHEET 1 OF 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
USAF - 82, 85

User activities:

DD FORM 1 OCT 59 233

☆ U. S. GOVERNMENT PRINTING OFFICE: [illegible]

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:09Z
Check the source to verify that this is the current version before use.