
FED SUP CLASS
5306

MS9532

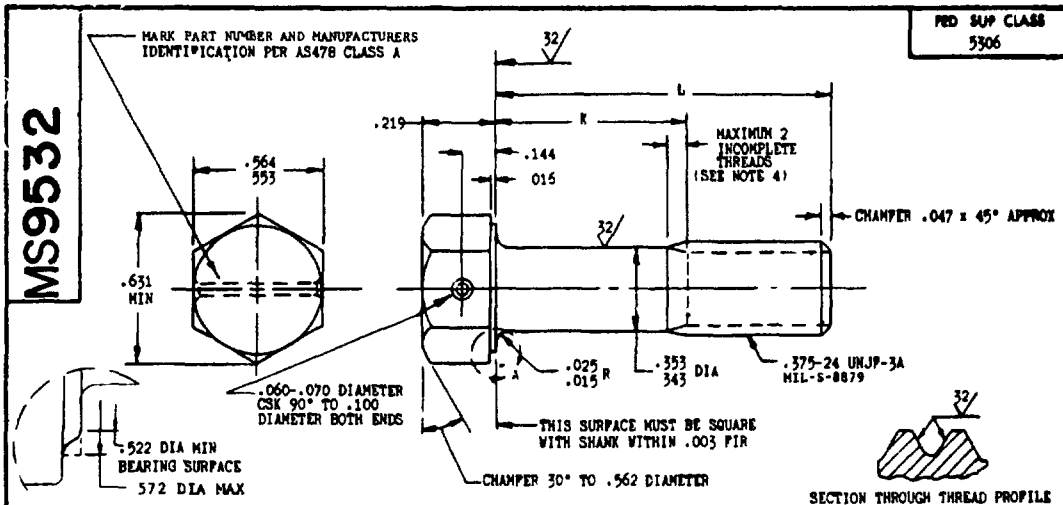

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9532-04	.625	.088-.108	3.35
MS9532-05	.688	.088-.108	3.52
MS9532-06	.750	.088- 108	3 69
MS9532-07	.812	.088- 108	3 86
MS9532-08	.875	088-.108	4.03
MS9532-09	938	.088- 108	4 20
MS9532-10	1.000	.088- 108	4.37
MS9532-11	1.062	.088-.108	4 53
MS9532-12	1.125	.088- 125	4.70
MS9532-13	1.188	.128- 188	4 87
MS9532-14	1.250	.190-.250	5 04
MS9532-15	1.312	.252-.312	5 21
MS9532-16	1.375	.315- 375	5.37
MS9532-17	1.438	.378-.438	5.54
MS9532-18	1 500	.440- 500	5.71
MS9532-19	1.562	.502-.562	5.88
MS9532-20	1.625	.565-.625	6.05
MS9532-21	1.688	.628-.688	6.21
MS9532-22	1.750	.690-.750	6.38
MS9532-23	1.875	.815-.875	6.72
MS9532-24	2.000	.940-1.000	7.05
MS9532-25	2.125	1.065-1.125	7 39
MS9532-26	2.250	1.190-1.250	7.73
MS9532-27	2.375	1.315-1.375	8.06
MS9532-28	2.500	1.440-1.500	8.40
MS9532-29	2.625	1.565-1.625	8.73
MS9532-30	2.750	1.690-1.750	9.07
MS9532-31	2.875	1.815-1.875	9.41
MS9532-32	3.000	1.940-2.000	9.74
MS9532-33	3 125	2.065-2.125	10.08
MS9532-34	3.250	2.190-2.250	10.41
MS9532-35	3.375	2.315-2.375	10.75
MS9532-36	3 500	2.440-2.500	11.09
MS9532-37	3 625	2.565-2 625	11 42
MS9532-38	3 750	2 690-2.750	11.76
MS9532-39	3.875	2.815-2.875	12 09
MS9532-40	4 000	2.940-3.000	12.43
MS9532-41	4.125	3.065-3.125	12.77
MS9532-42	4.250	3.190-3.250	13.10
MS9532-43	4.375	3 315-3 375	13.44
MS9532-44	4 500	3.440-3 500	13.77
MS9532-45	4 625	3.565-3.625	14.11
MS9532-46	4.750	3 690-3.750	14.45
MS9532-47	4.875	3.815-3.875	14.78
MS9532-48	5.000	3 940-4.000	15.12
MS9532-49	5.125	4.065-4.125	15.45
MS9532-50	5.250	4.190-4.250	15.79
MS9532-51	5.375	4.315-4.375	16.13
MS9532-52	5.500	4.440-4.500	16.46
MS9532-53	5.625	4 565-4.625	16.80
MS9532-54	5.750	4.690-4.750	17.13
MS9532-55	5.875	4.815-4.875	17.47
MS9532-56	6.000	4.940-5.000	17.81

1. SHANK SHALL BE STRAIGHT WITHIN .0025 PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .017 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL STEEL AMS 6322.
6. HARDNESS ROCKWELL C26-32.
7. FINISH CADMIUM PLATE PER AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
9. MANUFACTURING SPECIFICATION AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. SURFACE TEXTURE USAS B46.1-1962 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON
11. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED
12. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT AECP AIR STD 17/2 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN REGARDING THE INTERNATIONAL AGREEMENT CONCERNED

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE S A E AEROSPACE PROPULSION DIVISION

APPROVED 2 Feb 1968 REVISED

P.A		TITLE	MILITARY STANDARD
USAF--1	CENTER ARTICLE INTEREST	BOLT, MACHINE STEEL AMS 6322, CADMIUM PLATE, DRILLED, 1 HOLE, HEXAGON HEAD 375-24 UNJF-3A	MS9532
Other Cust			
AVY-AS ARMY-AV			
PROCUREMENT SPECIFICATION NO		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U.S. GOVERNMENT PRINTING OFFICE: 1968 301 516 4205

This military standard has been approved by the Department of Defense and is mandatory for use by all departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Reviewer activities

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.