
# MS9534

FED. SUP CLASS 5306

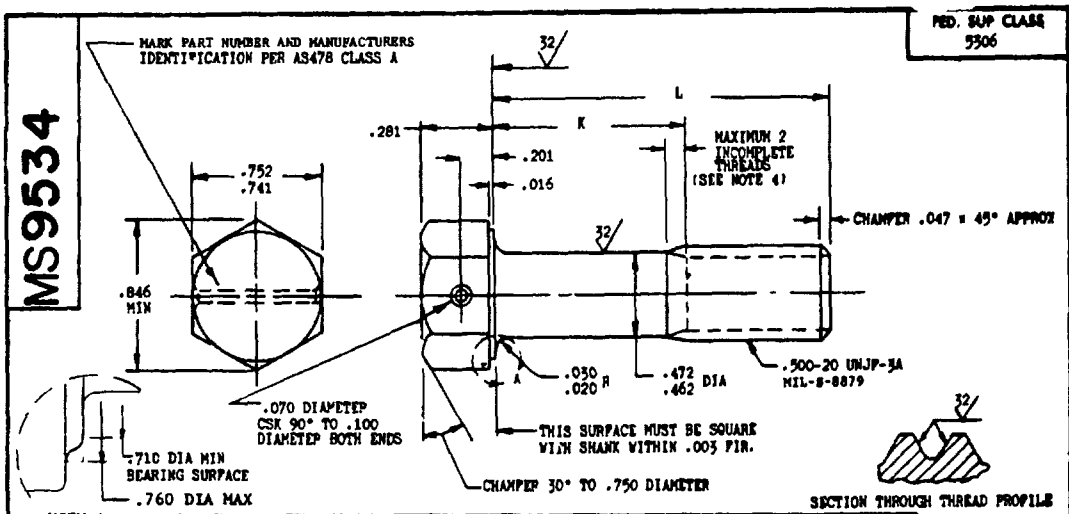


| PART NUMBER | L | K | APPROX WEIGHT LB/100 |
|---|---|---|---|
| MS9534-04 | .812 | .105-.125 | 7.77 |
| MS9534-05 | .875 | .105-.125 | 8.07 |
| MS9534-06 | .938 | .105-.125 | 8.37 |
| MS9534-07 | 1.000 | .105-.125 | 8.67 |
| MS9534-08 | 1.062 | .105-.125 | 8.98 |
| MS9534-09 | 1.125 | .105-.125 | 9.28 |
| MS9534-10 | 1.188 | .105-.125 | 9.58 |
| MS9534-11 | 1.250 | .105-.125 | 9.88 |
| MS9534-12 | 1.312 | .105-.125 | 10.19 |
| MS9534-13 | 1.375 | .105-.125 | 10.49 |
| MS9534-14 | 1.438 | .128-.188 | 10.79 |
| MS9534-15 | 1.500 | .190-.250 | 11.09 |
| MS9534-16 | 1.562 | .252-.312 | 11.39 |
| MS9534-17 | 1.625 | .315-.375 | 11.70 |
| MS9534-18 | 1.688 | .378-.438 | 12.00 |
| MS9534-19 | 1.750 | .440-.500 | 12.30 |
| MS9534-20 | 1.875 | .565-.625 | 12.90 |
| MS9534-21 | 2.000 | .690-.750 | 13.51 |
| MS9534-22 | 2.125 | .815-.875 | 14.11 |
| MS9534-23 | 2.250 | .940-1.000 | 14.72 |
| MS9534-24 | 2.375 | 1.065-1.125 | 15.32 |
| MS9534-25 | 2.500 | 1.190-1.250 | 15.93 |
| MS9534-26 | 2.625 | 1.315-1.375 | 16.53 |
| MS9534-27 | 2.750 | 1.440-1.500 | 17.13 |
| MS9534-28 | 2.875 | 1.565-1.625 | 17.74 |
| MS9534-29 | 3.000 | 1.690-1.750 | 18.34 |
| MS9534-30 | 3.125 | 1.815-1.875 | 18.95 |

| PART NUMBER | L | K | APPROX WEIGHT LB/100 |
|---|---|---|---|
| MS9534-31 | 3.250 | 1.940-2.000 | 19.55 |
| MS9534-32 | 3.375 | 2.065-2.125 | 20.16 |
| MS9534-33 | 3.500 | 2.190-2.250 | 20.76 |
| MS9534-34 | 3.625 | 2.315-2.375 | 21.36 |
| MS9534-35 | 3.750 | 2.440-2.500 | 21.97 |
| MS9534-36 | 3.875 | 2.565-2.625 | 22.57 |
| MS9534-37 | 4.000 | 2.690-2.750 | 23.18 |
| MS9534-38 | 4.125 | 2.815-2.875 | 23.78 |
| MS9534-39 | 4.250 | 2.940-3.000 | 24.38 |
| MS9534-40 | 4.375 | 3.065-3.125 | 24.99 |
| MS9534-41 | 4.500 | 3.190-3.250 | 25.59 |
| MS9534-42 | 4.625 | 3.315-3.375 | 26.20 |
| MS9534-43 | 4.750 | 3.440-3.500 | 26.80 |
| MS9534-44 | 4.875 | 3.565-3.625 | 27.41 |
| MS9534-45 | 5.000 | 3.690-3.750 | 28.01 |
| MS9534-46 | 5.125 | 3.815-3.875 | 28.61 |
| MS9534-47 | 5.250 | 3.940-4.000 | 29.22 |
| MS9534-48 | 5.375 | 4.065-4.125 | 29.82 |
| MS9534-49 | 5.500 | 4.190-4.250 | 30.43 |
| MS9534-50 | 5.625 | 4.315-4.375 | 31.03 |
| MS9534-51 | 5.750 | 4.440-4.500 | 31.64 |
| MS9534-52 | 5.875 | 4.565-4.625 | 32.24 |
| MS9534-53 | 6.000 | 4.690-4.750 | 32.84 |

1. SHANK SHALL BE STRAIGHT WITHIN .002 FIR PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .025 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET
5. MATERIAL STEEL AMS 6322.
6. HARDNESS ROCKWELL C26-32.
7. FINISH CADMIUM PLATE PER AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
9. MANUFACTURING SPECIFICATION AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. SURFACE TEXTURE USAS B46 1-1962 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON
11. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/2 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RE-EFFECTING THE INTERNATIONAL AGREEMENT CONCERNED

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE S A E AEROSPACE PROPULSION DIVISION

APPROVED 2 Feb 1968 REVISED

| P.A. | TITLE | MILITARY STANDARD |
|---|---|---|
| USAF-11 | INTERNATIONAL INTEREST | BOLT, MACHINE-STEEL AMS 6322, CADMIUM PLATE, DRILLED, 1 HOLE, HEXAGON HEAD, .500-20 UNJF-3A |
| Other Cust: NAVY-AS ARMY-AV | | MS9534 |
| PROCUREMENT SPECIFICATION: NONE | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE ☆ U S GOVERNMENT PRINTING OFFICE: 1968-301-316/4201

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document. Reviewer activities.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.