MIL-S-8932/1
12 August 1980
SUPERSEDING
MIL-S-8933
28 January 1965

MILITARY SPECIFICATION SHEET

SWITCHES, PRESSURE, AIRCRAFT, ABSOLUTE, TYPES I AND II, CLASS 1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switch assembly described herein shall consist of this document and the issue in effect of Specification MIL-S-8932.

1. SCOPE

1.1 Scope. This specification covers the detail requirements of aircraft absolute pressure switches for use in ac and dc applications.

1.2 Classification. Pressure switches covered by this specification shall be of the following types and class as specified.

Type - Types I and 11 switches shall be as specified in MIL-S-8932 (see 6.2).

Class - Class 1 switches shall be the aircraft absolute pressure switches which respond to the difference in pressure between an applied pressure and zero pressure (perfect vacuum).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Military

MIL-S-8932	Switches, Pressure, Aircraft, General Specification for

Beneficial comments (recommendations, additions} deletions) and any pertinent data which may be of use in improving this document should be addressed to: Engineering Specifications and Standards Department (Code 93), Naval Air Engineering Center, Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1650

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:43Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 Requirements. Requirements shall be in accordance with the general specification MIL-S-8932 and as specified herein. Each switch supplied under this specification shall incorporate a manufacturer's part number and shall have passed the first article tests as specified in MIL-S-8932.

3.1.1 Pressure port designations. Each differential pressure switch shall have two pressure parts as shown on the applicable MS. The designation "PI" shall be stamped next to the higher pressure connection and the designation "P2" shall be stamped next to the lower pressure connection. The case pressure release shall be marked "CPR". The designations shall be permanently and legibly stamped on the switch case directly adjacent to the applicable pressure port.

3.2 Design.

3.2.1 Case. Case dimensions shall conform to the applicable MS.

3.2.2 Number of contacts. The number of switch contacts shall be as illustrated on the applicable figure 1 or 2.

3.3 Current ratings and types of loads.

3.3.1 Alternating current (at). The maximum ac current required to be carried by the switch shall be as specified on the applicable MS. The load shall be resistive.

3.3.2 Direct current (de). The maximum value of dc current that the switch is required to carry is specified on the applicable MS. The load shall be resistive.

3.3.3 Identification of product. A nameplate, permanently and legibly marked with the following information, shall be securely attached to the switch case. The nameplate shall not be attached to, or form an integral part of a cover plate that is removable.

SWITCH PRESSURE, AIRCRAFT
Type I (engine mounted) or
Type II (bulkhead mounted) (as applicable)
Class 1 absolute
National Stock No.
MS Part No.
Manufacturer's Code and Part No.
Serial No.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:43Z
Check the source to verify that this is the current version before use.

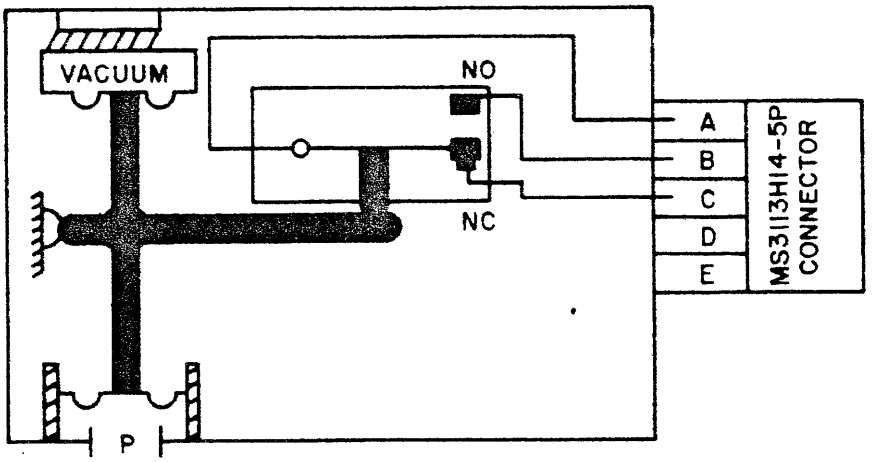


Figure 1. Absolute pressure switch schematic, pressure port open.

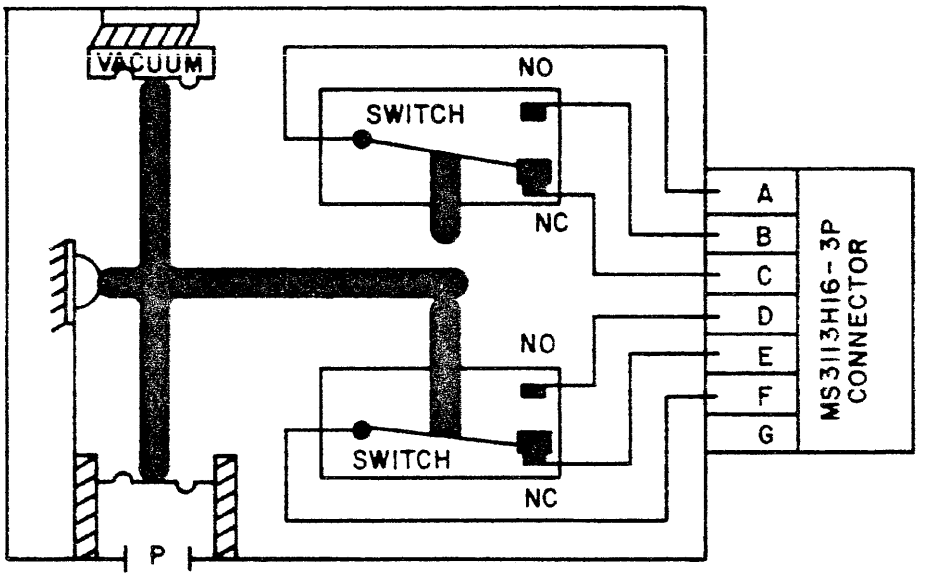


Figure 2. Absolute pressure switch schematic, pressure port open.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:43Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with the general specification MIL-S-8932 and as specified herein.

4.1.1 First article inspection. The first article inspection of the switch assembly shall consist of the applicable examinations and tests specified in MIL-S-8932.

4.1.1.2 First article samples. The first article samples shall consist of three switch assemblies of the part number contracted for.

4.1.2 Quality conformance inspection. The quality conformance inspection shall consist of the tests required in MIL-S-8932.

4.1.3 Tolerance. Tolerances for the tests and examinations specified in Section 4 of MIL-S-8932 shall be as specified on the applicable MS.

4.1.4 Reference values. Before subjecting the pressure switch to any test requiring reference values, the reference values shall be obtained by the method specified in MIL-S-8932.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be in accordance with MIL-S-8932.

6. NOTES

" 6.1 Intended use. The aircraft absolute pressure switches are intended for use in aircraft to operate equipment such as pumps and valves, and indicating lights.

6.2 Ordering data. The instructions and definitions contained in Section 6 of MIL-S-8932 are applicable to, and form a part of this specification.

Custodians
Army - AV
Navy - AS

Preparing activity
Navy - AS
Project No. 1650-0349

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:43Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, New Jersey 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316



Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, New Jersey 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-8932/1 SWITCHES, PRESSURE, AIRCRAFT, ABSOLUTE, TYPES I AND II, CLASS I

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:43Z
Check the source to verify that this is the current version before use.