|INCH-POUND|
MIL-V-8965B
14 December 1990
SUPERSEDING
MIL-V-8965A
16 July 1984

MILITARY SPECIFICATION

VALVE CORE, OXYGEN, HIGH PRESSURE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a high pressure (2,100 psig normal rating) aircraft oxygen valve core.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2c).

SPECIFICATIONS

FEDERAL

BB-N-411 - Nitrogen, Technical

PPP-B-601 - Boxes, Wood, Cleated-Plywood

PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-P-116 - Preservation, Methods of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Systems Engineering and Standardization Department (Code 53), Naval Air Engineering Center, Lakehurst, NJ 08733-5100, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1660
DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY (Continued)

MIL-B-22191	-	Barrier Material, Transparent, Flexible, Heat Sealable
MIL-O-27210	-	Oxygen, Aviator's Breathing, Liquid and Gas
MIL-B-36819	-	Bottle, Safety Cap, Plastic, Tablet and Capsule, Round, Light-Resistant

STANDARDS

FEDERAL

FED-STD-H28/1	-	Nomenclature, Definitions and Letter Symbols for Screw Threads

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-130	-	Identification Marking of U.S. Military Property
MIL-STD-889	-	Dissimilar Metals
MIL-STD-1359	-	Cleaning Methods and Procedures for Breathing Oxygen Equipment
MS22066	-	Valve, Check, Oxygen Charging
MS26545	-	Cylinders, Steel, Compressed Gas, Nonshatterable, Seamless, 1800 PSI, and 2100 PSI
AN800	-	Cone-Union
AN805	-	Nut-Union

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.

2.2 Non-Government publications. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2c).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D1149-86 - Standard Test Method for Rubber Deterioration - Surface Ozone Cracking in a Chamber

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1137.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2c), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Materials. Materials shall conform to applicable specifications and shall be as specified herein and on applicable drawings. Materials which are not covered by specifications, or which are not specifically described herein, shall be of the lightest practicable weight, and suitable for the purpose intended.

3.2.1 Age. Elastomer components, except silicone, shall be not more than 12 months old from cure date of manufacture to the date of delivery to any Government service or accessory manufacturer.

3.2.2 Elastomer components. The elastomer components shall be composed of an ozone resistant composition which shall not bloom and shall meet the specified ozone resistant performance requirements.

3.2.3 Metal parts. All metal parts shall be of a corrosion-resistant material or treated in a manner to render them adequately resistant to corrosion.

3.2.3.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MIL-STD-889.

3.2.4 Protective treatment. When materials are used in the construction of the valve cores that are subject to deterioration when exposed to environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. Protective coating which might crack, chip, or scale during normal service life or under extremes of environmental conditions shall not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

3.3 Design and construction. The design and construction of the valve core shall be in accordance with the configuration and dimensions shown on Figure 1 and as required to perform as specified herein, when oriented in any position. The valve core shall be designed for a pressure rating of 2,100 psig.

3.3.1 Threads. Screw threads shall conform to FED-STD-H28/1.

3.4 Performance.

3.4.1 Visual examination. When visually examined as specified in 4.6.1.1 thru 4.6.1.3, the valve core shall conform to the requirements of this specification.

3.4.2 Flow capacity. THe flow through the valve core shall be at least 50 liters per minute (l/m) when tested as specified in 4.6.2.

* 3.4.3 Leakage (low pressure). The valve core leakage shall not exceed .001 l/m when tested as specified in 4.6.3.

* 3.4.4 Leakage (high pressure). The valve core leakage shall not exceed 0.01 l/m when tested as specified in 4.6.4.

3.4.5 Endurance. The valve core shall pass the requirements specified in 3.4.4 when tested as specified in 4.6.5.

3.4.6 Oxygen bomb test. The valve core shall show no evidence of charring or deterioration when tested as specified in 4.6.6.

3.4.7 Ozone resistance. The elastomer test slabs shall not show any evidence of checking, cracking, or other damage when tested as specified in 4.6.7.

* 3.5 Cleaning. The valve core shall be oxygen clean in accordance with MIL-STD-1359 with the cleanliness test method for category 1. After completion of the cleaning and when assembled, a Halogen or Halide detector having a minimum sensitivity of not less than 3×10^{-4} standard cc/second shall be used to detect solvent residue. The valve core shall be packaged as specified in 5.1.

* 3.6 Marking. The valve core shall be marked for identification in accordance with MIL-STD-130.

3.7 Workmanship. The workmanship shall be of a quality that will produce valve cores that are free of any defect or irregularities which could affect performance, reliability, or durability.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3)

b. Quality conformance inspection (see 4.4)

* 4.3 First article inspection. First article inspection shall consist of the examinations and tests specified in Table I.

4.3.1 First article samples. Unless otherwise specified, as soon as practicable after award of a contract or order, the manufacturer shall submit four valve cores and four elastomer test slabs, six by six by 0.075 inch composed of the identical composition and cure that was used to manufacture the elastomeric components. The samples shall be representative of the construction, workmanship, components and materials to be used during production. When a manufacturer is in continuous production of these valve cores from contract to contract, submission of further first article samples on the new contract may be waived at the discretion of the acquiring activity (see 6.2d). Approval of the first article inspection samples or the waiving of the first article inspection does not exclude the requirements of submitting to the quality conformance inspection. The first article samples shall be furnished to the Government as directed by the contracting officer (see 6.2e).

4.3.1.1 First article information. Upon completion of the first article inspection program, the Government activity responsible for conducting the inspection program (see 6.2e) shall report to the contracting officer the results of the inspection program, with appropriate recommendations.

4.3.1.2 First article sample disposition. The samples will be destroyed during the inspection program and will not be returned to the contractor.

4.4 Quality conformance inspection. Quality conformance inspection shall consist of the examinations and tests specified in Table II. The sampling and inspection levels and acceptance criteria shall conform to MIL-STD-105.

4.4.1 Sampling.

4.4.1.1 Inspection test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

4.4.1.1.1 Valve core. An inspection lot size shall be expressed in units of one valve core made under essentially the same conditions and from the same materials and components.

4.4.1.1.2 Packaging. An inspection lot size shall be expressed in units of one fully prepared shipping container, containing valve cores, fully prepared for delivery, made from essentially the same materials and components. The sample unit shall be one shipping container, containing valve cores, fully prepared for delivery with the exception that it need not be sealed.

4.4.1.2 Sampling for tests and examinations of the valve cores. The sample size, acceptance criteria, test and examinations required for the valve cores shall be as specified in Table II.

4.5 Test conditions.

4.5.1 Gas. Unless otherwise specified, the gas used in testing the valve cores shall be oil free nitrogen, 99.95% pure, in accordance with BB-N-411, Type I, Grade A, Class I.

4.5.2 Temperature and pressure. Unless otherwise specified, tests shall be conducted at local ambient temperature and barometric pressure. The temperature and barometric pressure shall be recorded at the time of inspection. This information shall be available for computation of test data, where required, to normal temperature and pressure (NTP) conditions. NTP conditions are 29.92 inches of mercury and 70°F. Test instruments shall be calibrated or adjusted according to their required usage in conducting individual tests.

4.5.3 Test housing. During the performance of tests specified herein, the valve core shall be installed in a test housing conforming to the body of MS22066 valve. The valve core shall be torqued to 2 to 3 inch-pounds and shall not be retorqued during test.

4.6 Inspection methods.

4.6.1 Visual examination.

4.6.1.1 Valve core. Every valve core shall be visually examined for free movement of parts (see figure 1), markings, cleanliness, condition of threads, and workmanship.

4.6.1.2 Dimensions. Every valve core shall be measured to determine that the dimensions are as specified herein. Any nonconformance shall be cause for rejection of the valve core.

4.6.1.3 Packaging. Each of the fully prepared shipping containers, containing valve cores, selected as a sample unit from the lot, shall be examined to determine that the packaging, packing and marking conform to this specification. The list of defects, Table III, shall be used to enumerate the defects found.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

4.6.2 Flow capacity. A source of gas shall be connected to the inlet and of the test housing. A flow of gas shall be passed through the housing under a constant pressure of 200 psig. The rate of flow through the housing shall be measured and shall meet the requirements in 3.4.2.

4.6.3 Leakage (low pressure). A source of gas shall be connected to the outlet end of the test housing. The gas pressure shall be increased to at least 5 psig. While the pressure is constant, the leakage through the test housing shall be measured and shall meet the requirements specified in 3.4.3.

4.6.4 Leakage (high pressure). The valve core shall be subjected to the high pressure leakage test under the conditions specified in 4.6.4.1, 4.6.4.2 and 4.6.4.3. A source of gas shall be connected to the outlet end of the test housing.The gas pressure shall be increased to values of 100 psig, 1000 psig, 2000 psig, and 3000 psig. With a constant pressure at each of these values, the leakage through the test housing shall be measured and shall meet the requirements specified in 3.4.4.

4.6.4.1 Room temperature. The valve core shall be installed in a test housing at room temperature and the valve core shall then be tested for leakage as specified in 4.6.4.

4.6.4.2 Low temperature. The valve core shall be installed in a test housing. The housing and valve core shall be exposed to a temperature of -65° + 5°F for at least 3 hours. The valve core shall then be tested for leakage as specified in 4.6.4. The valve core and housing shall be maintained at a temperature of -65° + 5°F during the test.

4.6.4.3 High temperature. The valve core shall be installed in a test housing. The housing and the valve core shall be exposed to a temperature of 160° + 5°F for at least 3 hours. The valve core shall then be tested for leakage as specified in 4.6.4. The valve core and housing shall be maintained at a temperature of 160° + 5°F during the test.

4.6.5 Endurance. The outlet end of the test housing shall be connected appropriately for filling and discharging a 25 cubic inch cylinder conforming to MS26545 or an equivalent container. The cylinder shall be filled through the test housing at a rate of 500 + 50 psi per minute to a pressure of at least 1,500 psig. The cylinder pressure shall then be depleted to 100 psig. This procedure shall be followed for at least 2,500 filling cycles. A leakage test specified in 4.6.4.1 shall be conducted at 100 psig and at 1,500 psig at every 500 filling cycles. At the completion of the endurance test, the valve core shall be subjected to the leakage test specified in 4.6.4.. The valve core shall meet the requirements specified in 3.4.5.

4.6.6 Oxygen bomb test.

4.6.6.1 Test equipment. The gas used in this test shall be oxygen in accordance with MIL-O-27210, Type I. The equipment used to perform the oxygen bomb test shall be in accordance with Figure 2. The valve that controls the oxygen to the test housing shall be a rapid-opening, 1/4-inch valve. The valve shall require no internal lubrication for operation and shall be rated for a minimum operating pressure of 3,000 psig. The valve shall be leak-tight when closed and shall open with such rapidity that at least 95 percent of the total

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

pressure rise in the test housing shall occur within 20 + 7 milliseconds. The rate of pressure rise shall be determined by measuring with a fast-responding, small-volume pressure transducer substituted for the test housing in the test setup. The tubing and fittings connecting the quick acting valve to the test housing shall be 3/16-inch size and fabricated from corrosion-resistant steel. The run of tubing between the valve and the test housing shall not be bent more than 4 degrees. The bleed valve shall be a type which contains no organic material and requires no internal lubrication for operation. The bleed valve shall be so installed that when the valve is closed the test housing does not communicate with the packing side of the valve.

4.6.6.2 Test procedures. With a valve core installed in the test housing, the outlet end of the test housing shall be sealed to retain 2,200 psig gas pressure with a 1/8-inch corrosion-resistant steel, pipe cap. The inlet end of the housing shall be connected to the test setup in accordance with figure 2. The test housing shall be pressurized to a pressure of 2,175 + 25 psig for 30 seconds. The rate of pressurization shall be 95 percent of total pressurization in 20 + 7 milliseconds. The pressure shall be released through the bleed valve, the valve core shall be removed, and non-metallic components examined for charring or deterioration. The valve core shall meet requirements specified in 3.4.6.

4.6.7 Ozone resistance (elastomer components). The elastomer test slabs submitted for first article inspection shall be tested for ozone resistance. The test apparatus shall be in accordance with ASTM D1149-86. The test slabs shall be elongated 20 percent, placed in an ozone-free atmosphere for 24 hours, then placed in the ozone chamber. The chamber shall be adjusted to 100° ± 2°F and to give an exposure of ozone concentration of 120 + 10 parts by volume by ozone per million parts by volume of air. The air-ozone velocity in the chamber shall be at least 2 feet per second. The test slabs shall be exposed to these conditions for 60 minutes and then examined under 10X magnification and shall pass the requirements specified in 3.4.7.

5. PACKAGING

* 5.1 Preservation. Each valve core shall be cleaned for oxygen service in accordance with MIL-STD-1359. Petroleum or other inflammable solvents shall not be used. Each valve core shall be preserved in accordance with MIL-P-116, Method IC-3. No contact preservation shall be used. Each valve core shall be sealed in a plastic bag conforming to MIL-B-22191, Type III. After preservation packaging the valve core shall be placed in a translucent polymer vial. The vial shall be in accordance with MIL-B-36819, type I or II or comparable commercial vial with a snap cap. The vial shall be approximately two and one quarter inches in height and five eighth's inch outside diameter (approx. 4 Dram). A green color tape 1/2 inch wide and 2 inches long with the notation in black letters 1/8 inch high "VALVE CORE - OXYGEN CLEAN", shall be placed across the cap to provide tamper prevention. The vial shall contain an identification label placed inside the vial to be viewed from the outside. The label shall contain the following information: NSN, P/N MIL-V-8965, "OXYGEN VALVE CORE", and Manufacturer's CAGE.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2f).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

5.2.1 Level A. Valve cores packaged as specified in 5.1 shall be packed for shipment in wooden containers conforming to PPP-B-601, overseas type, style optional. The gross weight limitations, as well as container closure, shall be as specified in PPP-B-601.

5.2.2 Level B. Valve cores packaged as specified in 5.1 shall be packed for shipment in fiberboard containers conforming to PPP-B-636, class weather resistant. The gross weight limitations, as well as container closure, shall be as specified in PPP-B-636.

5.2.3 Level C. The packaged valve cores shall be packed in a manner to ensure safe delivery and acceptance at destination. Containers shall comply with the Uniform Freight Classification Rules on other carrier regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, interior and exterior containers shall be marked in accordance with MIL-STD-129.

5.3.1 Precautionary marking. The following precautionary marking shall appear on each package:

CAUTION: DO NOT STORE IN PROXIMITY OF PETROLEUM PRODUCTS

DO NOT ALLOW CONTAMINANTS OF ANY KIND TO BE
USED ON OR ABOUT THE OXYGEN VALVE CORES

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The valve core is intended to be used in oxygen charging valve conforming to MS22066 when the charging valve is installed in aircraft portable oxygen systems or in emergency portable oxygen systems.

* 6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification, including amendments.

b. Government part number and quantity.

c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

d. Whether first article inspection is waived (see 4.3.1).

e. Name and address of the first article inspection laboratory (see 4.3.1) and the name of the Government activity responsible for conducting the first article inspection program (see 4.3.1.1).

f. Selection of applicable levels of packing (see 5.2).

g. Whether precautionary markings are required (see 5.3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

* 6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Description (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirement List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
4.3.1.1	DI-T-5329	First article inspection report	Use contractor format

The above DID's were those cleared as of the date of this specification. The current use of DOD 5010.12-L Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

* 6.3 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first production items, a standard production item from the contractor's current inventory, and the number of items to be tested as specified in 4.3.1. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

* 6.4 Subject term (key word listing).

Charging valve
Check valve
Emergency portable oxygen
High pressure oxygen
Portable oxygen system
Valve core

6.5 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians
Navy-AS
Air Force-11

Preparing activity
Navy-AS
(Project 1660-0604)

Review activity:
Air Force-71

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection.

Inspection	Requirement Paragraph(s)	Test Method Paragraph(s)
Visual examination	3.4.1	4.6.1.1
Dimensional examination	3.4.1	4.6.1.2
Flow capacity	3.4.2	4.6.2
Leakage (low pressure)	3.4.3	4.6.3
Leakage (high pressure)	3.4.4	4.6.4
Endurance	3.4.5	4.6.5
Oxygen bomb test	3.4.6	4.6.6
Ozone resistance	3.4.7	4.6.7

TABLE II. Quality conformance inspection


Inspection	Method	Sample size	Acceptance criteria
Visual	4.6.1	Every valve core	Reject all defective units examination
Dimensions	4.6.1.2	Inspection level S-2	Acceptance number zero, rejection number 1
Flow capacity	4.6.6	Inspection level S-1	Acceptance number zero, rejection number 1
Leakage	4.6.3	Every valve core	Reject all defective units (low pressure)
Leakage (high pressure, room temperature)	4.6.4.1	Inspection level S-2	Acceptance number zero, rejection number 1
Leakage (high pressure, low temperature)	4.6.4.2	Inspection level S-1	Acceptance number zero, rejection number 1
Leakage (high pressure, high temperature)	4.6.4.3	Inspection level S-1	Acceptance number zero, rejection number 1
Packaging	4.6.1.3	Inspection level S-2	Acceptance quality level of 4 defects per hundred units

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

TABLE III. List of defects for packaging.

Item	Defects
Exterior and interior markings	Missing, incorrect, incomplete, illegible, improper size, location, sequence; or method of application; markings not the same on the interior and exterior containers.
Packaging and packing materials	Any non-conforming component; any missing, damaged, or otherwise defective.
Workmanship	Inadequate application of the components such as incomplete closure of the unit package, intermediate package, container flaps, loose strappings, etc., bulging or distortion of the containers.
Exterior & interior weight or content	Number per container is more or less that required; gross or net weight exceeds the requirements.


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

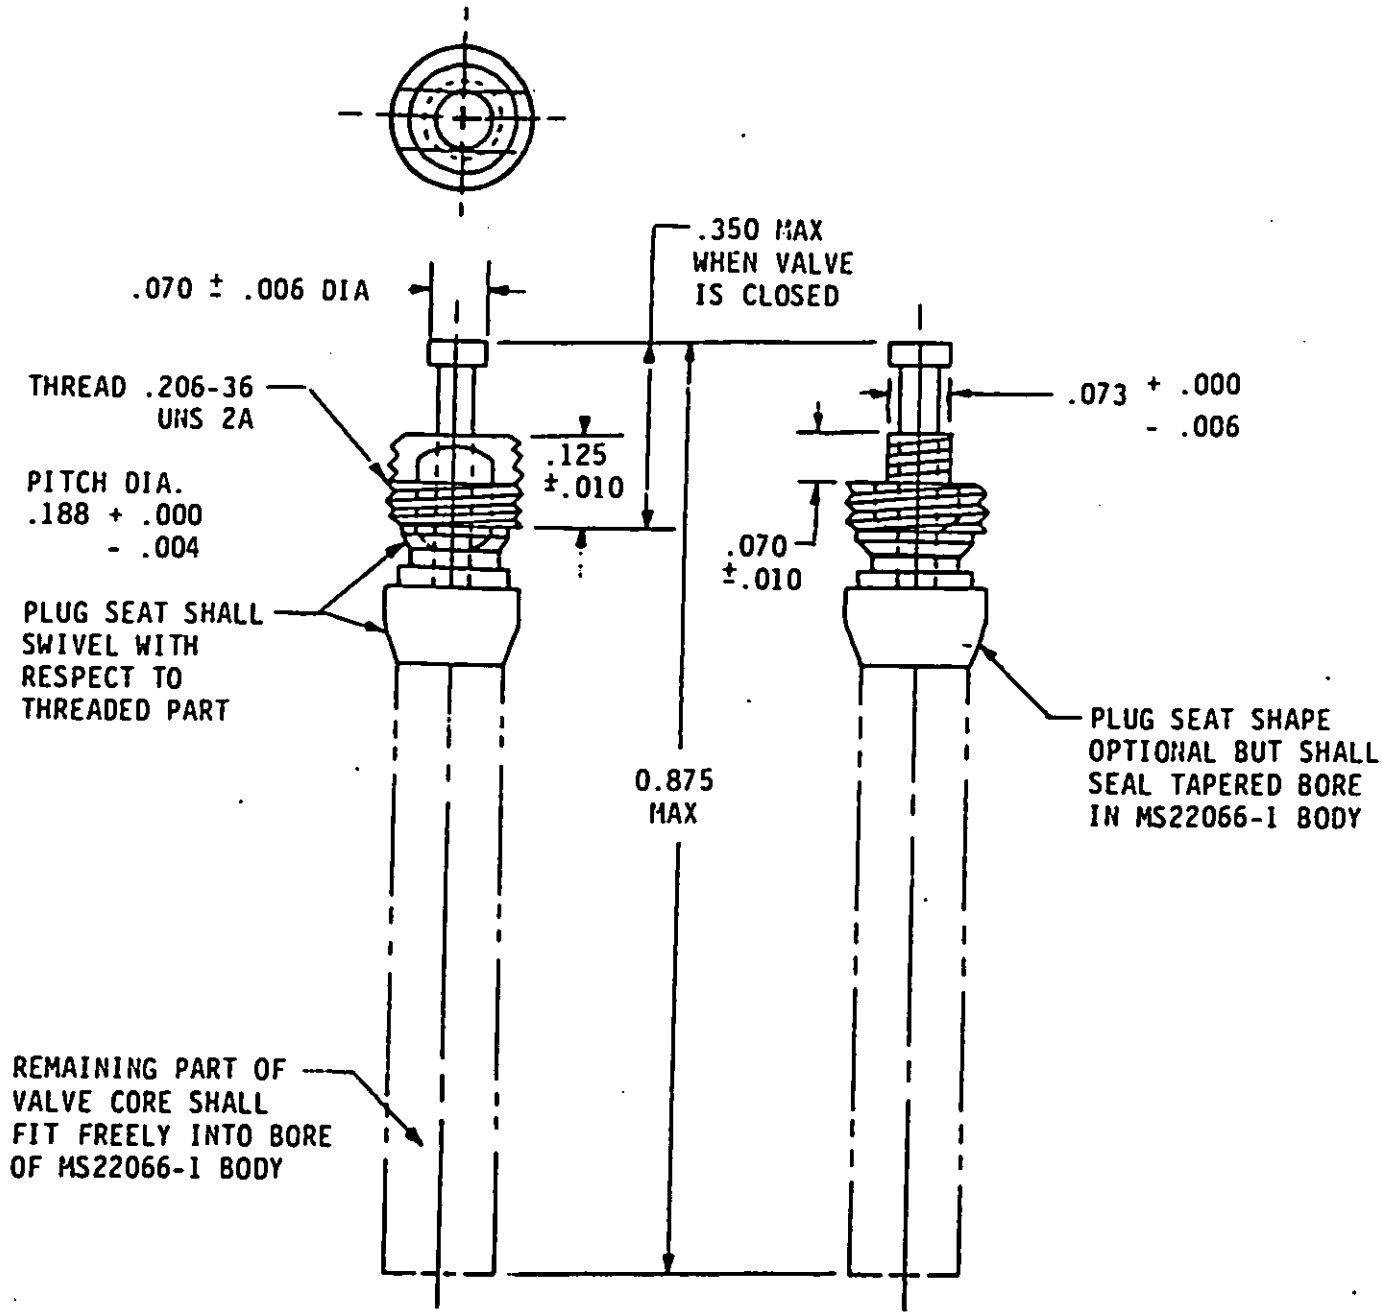

DIMENSIONS IN INCHES

FIGURE 1. Valve core.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

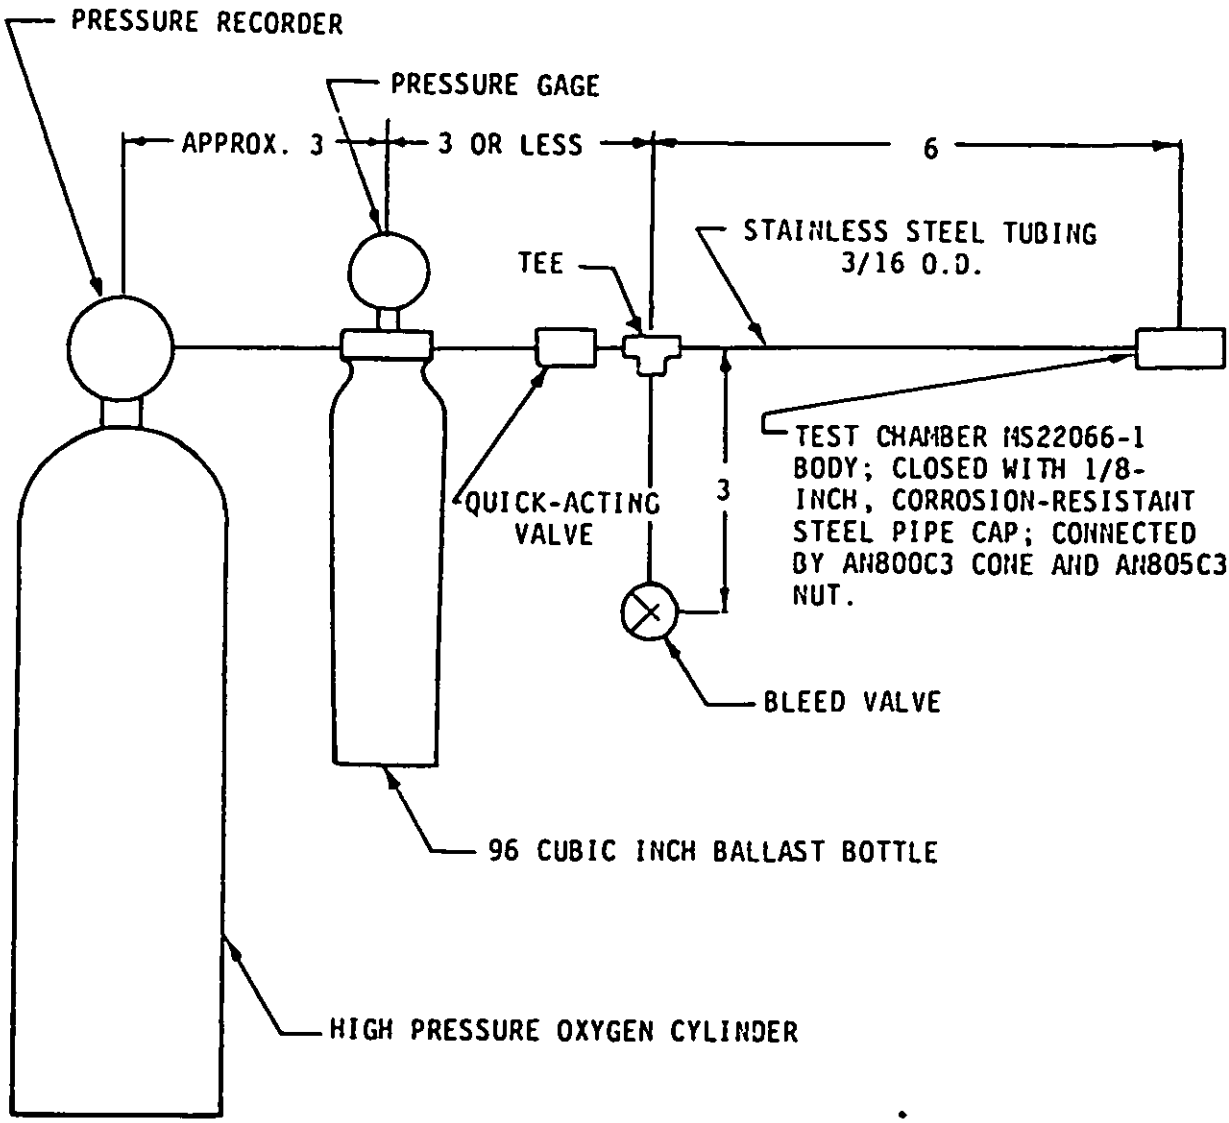

DIMENSIONS IN INCHES.

FIGURE 2. Oxygen bomb test equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-V-8965B	2. DOCUMENT DATE (YYMMDD) 90/12/14

3. DOCUMENT TITLE
Valve Core, Oxygen, High Pressure

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
c. ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Commanding Officer NAEC, SESD Code 53	b. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (908) 323-1280
c. ADDRESS (*Include Zip Code*) Lakehurst, NJ 08733-5100	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:47Z
Check the source to verify that this is the current version before use.