MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, THYRISTORS, (CONTROLLED RECTIFIERS) SILICON

TYPES 2N2024, 2N2025, 2N2027, 2N2029, 2N2030

This amendment forms a part of Military Specification MIL-S-19500/203C(NAVY), dated 9 March 1970, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 2

1.4 Characteristics. Under $V_{FM;}$ delete "1.6" and substitute "1.9".

Page 7

TABLE I, Group A inspection, Forward "on" voltage, Maximum limits column: Delete "1.75" and substitute "1.9". Also, Turn-off time, Details column: Delete "145°C" and substitute "125°C".

Page 8

TABLE I, Group A inspection, Subgroup 4, Gate-controlled turn-on time, Maximum limits column: Delete "5" and substitute "15".

Page 10

TABLE II, Group B inspection, Subgroup 1, Forward "on" voltage, Details column: Delete "200a" and substitute "220a" and in the Maximum limits column, delete "1.60" and substitute "1.9".

Page 12

TABLE II, Group B inspection, Subgroup 4, Examination or test column: Add "End points: (same as subgroup 1)" at end of table.

TABLE III, Group C inspection, Subgroup 2, Terminal strength (stud torque): Delete "(see 4.5.2)".

Page 15

*Add 6.3 as follows:

" 6.3 The TO-94 package is interchangeable with the TO-49 package."


Page 17

* Delete figure 2 and substitute now figure 2 as printed on page 2 of this amendment.

1/ NOTE: The margins of this amendment are marked with an asterisk to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:40Z
Check the source to verify that this is the current version before use.

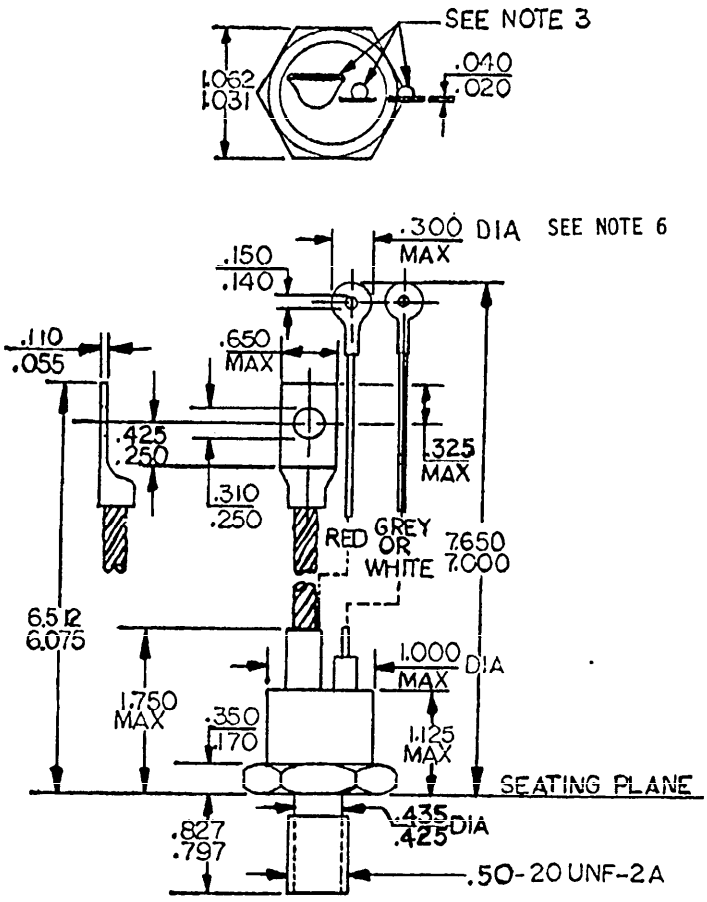

INCHES	MM
.020	.51
.040	1.02
.055	1.40
.110	2.79
.140	3.56
.150	3.81
.170	4.32
.250	6.35
.300	7.62
.310	7.87
.325	8.26
.350	8.89
.425	10.80
.435	11.05
.50	12.70
.650	16.51
.797	20.24
.827	21.01
1.000	25.40
1.031	26.19
1.062	26.97
1.125	28.58
1.750	44.45
6.075	154.31
6.512	165.40
7.000	177.80
7.650	194.31

NOTES:
1. Complete threads to extend within 2.50 (63.50 mm) threads of seating plane.
2. Maximum pitch diameter of plated threads shall be basic pitch diameter .4675 (11.87 mm) Ref. (Screw Thread Standards for Federal Services 1957) Handbook H28, P1.
3. Angular orientation of these terminals is undefined. Square or radius on end of terminal is optional.
4. A chamber or undercut on one or both ends of hex portions is optional.
5. Dimensions are in inches.
6. This auxiliary cathode lead may be cut off if not required for shielding of stray signals which might trigger the thyristor.

FIGURE 2. Dimensions of controlled rectifier, types 2N2024, 2N2025, 2N2027, 2N2029, and 2N2030.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:40Z
Check the source to verify that this is the current version before use.

User activities:
Navy - AS, OS, MC, CG, SH

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5961-N618)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:40Z
Check the source to verify that this is the current version before use.