INCH-POUND
A-A-59126/12D
16 January 2024
SUPERSEDING
A-A-59126/12C
7 January 2014

COMMERCIAL ITEM DESCRIPTION SHEET

TERMINALS, STUD (NONINSULATED)
STYLE SE12

The General Services Administration has authorized the use of this commercial item description (CID) as a replacement for Style SE12 of MIL-T-55155/12 for all federal agencies.

The requirements for acquiring the product described herein shall consist of this sheet and the latest issue in effect of CID A-A-59126.

REQUIREMENTS:

Dimensions and configuration: see Figure 1.

Comments, suggestions, or questions on this document should be emailed to usarmy.apg.devcom-c5isr.mbx.standardization-crx@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

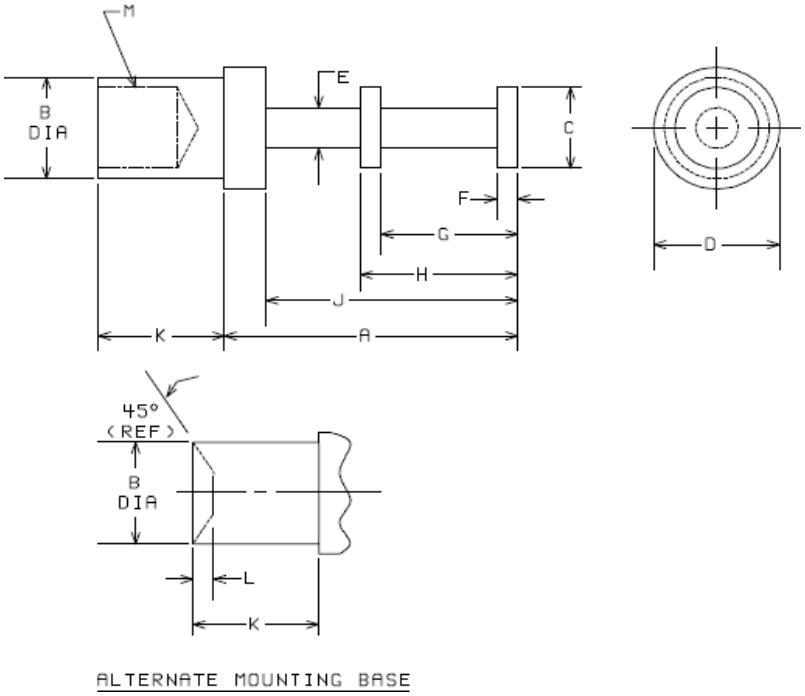


Figure 1. Configuration and Dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

Part Number	DIMENSIONS												
	A	B	C	D	E	F	G	H	J	K ±.005	L +.007 -.003	M	Mounting Board Thickness (REF)
AA59126/12X-01	.186	.072	.050	.093	.038	.020	.082	.102	.164	.082	.017	----	.062
AA59126/12X-02										.113			.094
AA59126/12X-03										.145			.125
AA59126/12X-04	.237	.090	.093	.125	.047	.020	.082	.102	.195	.105	----	.064 DIA X .062 deep max runout ±.005 TIR	.062
AA59126/12X-05										.135			.094
AA59126/12X-06										.165			.125
AA59126/12X-07	.360	.112	.145	.187	.065	.031	.130	.161	.314	.109	----	.076 DIA X .096 deep max runout ±.005 TIR	.062
AA59126/12X-08										.141			.094
AA59126/12X-09										.172			.125
AA59126/12X-10	.156	.062 +.000 -.005	.062	.094	.031	.022	.052	.072	.136	.053	----	.043 DIA X .04 Min deep	.031
AA59126/12X-11										.084			.062
AA59126/12X-12										.115			.094
AA59126/12X-13										.147			.125
AA59126/12X-14	.070	.032 +.000 -.005	.032	.047	.020	.010	.030	.040	.060	.053	----	.020 DIA X .026 Min deep	.031
AA59126/12X-15										.084			.062
AA59126/12X-16										.115			.094

Figure 1. Configuration and Dimensions (continued)

Figure 1 Notes:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±0.005 inch for types -01 through -09, and ±0.010 inch for types -10 through -16 on decimals and ±3º on angles for all types.
3. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

Type of mounting: swage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.

Table I. Substitutability data.

Part number in A-A-59126/12 1/	Part number in MIL-T-55155/12E 1/
AA59126/12X - 01	M55155/12X - 01
AA59126/12X - 02	M55155/12X - 02
AA59126/12X - 03	M55155/12X - 03
AA59126/12X - 04	M55155/12X - 04
AA59126/12X - 05	M55155/12X - 05
AA59126/12X - 06	M55155/12X - 06
AA59126/12X - 07	M55155/12X - 07
AA59126/12X - 08	M55155/12X - 08
AA59126/12X - 09	M55155/12X - 09
AA59126/12X -10	M55155/12X -10
AA59126/12X -11	M55155/12X -11
AA59126/12X -12	M55155/12X -12
AA59126/12X -13	M55155/12X -13
AA59126/12X -14	M55155/12X -14
AA59126/12X - 15	M55155/12X -15
AA59126/12X - 16	M55155/12X -16

1/ The complete part number shall include the symbol for the conductor material and finish.

MILITARY INTERESTS:

Custodian:
Army - CR
Navy – EC
Air Force – 85

Reviewer:
DLA – GS

CIVIL AGENCY COORDINATING ACTIVITY

GSA-7FXE

Preparing activity:
Army – CR

(Project No. 5940-2024-005)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:03Z
Check the source to verify that this is the current version before use.