METRIC

A-A-59142A
9 September 2019
SUPERSEDING
A-A-59142
21 January 1998

COMMERCIAL ITEM DESCRIPTION

ROSINS: GUM, WOOD, AND TALL OIL

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers three Classes, two Types, and 13 Grades of rosin.

2. CLASSIFICATION

2.1 Classes.

Class A - Gum rosin (obtained from oleoresin collected from living trees).
Class B - Wood rosin (obtained from the oleoresin contained in dead wood such as stumps and knots).
Class C - Tall oil rosin (obtained from tall oil).

2.2 Types.

Type I - Lump (solid mass (molten) or large lump)
Type II - Powdered (ground from Type I rosin)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DLA Aviation, VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or e-mailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil

AMSC N/A FSC 6810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

2.3 Grades. Type I rosin shall be of the following Grades as prescribed by 7 CFR §160.13:

Grade X (lightest color)
Grade WW
Grade WG
Grade N
Grade M
Grade K
Grade I
Grade H
Grade G
Grade F
Grade E
Grade D (darkest color)
Grade FF (unrefined dark-colored wood rosin)

3. SALIENT CHARACTERISTICS.

3.1 Type I rosin, physical and chemical characteristics shall conform to applicable physical and chemical characteristics of table I when tested as specified therein.

TABLE I. Physical and chemical characteristics of Type I rosin.

Characteristic	Requirement		ASTM test method
	Except Grade FF	Grade FF	
Grade	As specified	FF	D509
Insoluble matter in toluene, maximum percent by weight	0.05	0.05	D269
Softening point, °C, minimum	70	67	E28
Acid number, minimum	160	150	D465
Saponification number, minimum	166	162	D464

3.2 Type II rosin, physical and chemical characteristics shall conform to applicable physical and chemical characteristics of table II when tested as specified therein.

3.2.1 Particle size. Weigh 100 ± 1 g of the specimen into a large container and add approximately 1 liter of distilled water. Stir the rosin thoroughly in the water to separate all particles. Wash the rosin onto a 2.36 mm sieve conforming to ASTM E11 with a gentle stream of water while gently brushing, with a camel hair brush, any matter retained on the sieve. No rosin shall remain on the sieve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

3.2.2 Heat test. Weigh approximately 5 g of the specimen into a test tube and stopper lightly. Place the test tube in a water bath at 57 ± 1°C to the depth of the rosin in the test tube and let stand for 2 hours. Remove the test tube, wipe off the outside water, and gently tap with a pencil. Turn the contents out onto a sheet of paper or a flat dish. There shall be no aggregate lumps in the powdered material.

TABLE II. Physical and chemical characteristics of Type II rosin.

Characteristic	Requirement		ASTM test method
	All Grades except FF	Grade FF	
Grade[(1)]	As specified	FF	D509
Insoluble matter in toluene, maximum percent by weight	10.0	10.0	D269
Softening point, °C, minimum[(1)]	70	67	E28
Acid number, minimum[(1)]	160	150	D465
Saponification number, minimum[(1)]	166	162	D464
Particle size	100% pass 2.36mm sieve	100% pass 2.36mm sieve	3.2.1
Heat test	Uncongealed and free from lumps	Uncongealed and free from lumps	3.2.2

[(1)]Test to be performed on lumped Type I rosin before grinding.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Safety data sheet (SDS). Manufacturers shall prepare and submit a SDS in accordance with FED-STD-313, "Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities", and meeting the requirements of 29 CFR §1910.1200, "Occupational Safety and Health Standards: Hazard Communication".

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The product provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The item offered must have been sold to the Government or commercial market.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the contract or

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

order.

7. NOTES

(This section contains information of a general or explanatory nature that is helpful, but is not mandatory.)

7.1 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

This example describes a part numbering system for CID A-A-59142.

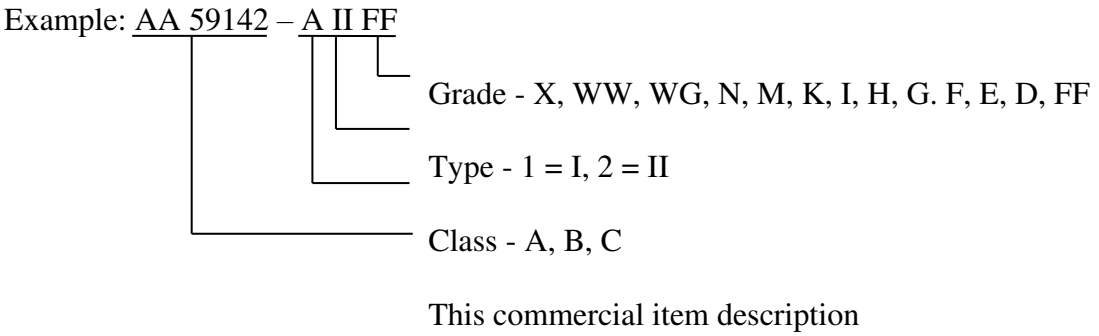

7.2 Ordering data. Acquisition documents must specify the following:

a. Title, name, and date of this commercial item description.
b. Unit and quantity required.
c. Packaging requirements.

7.3 National stock number (NSN). Table III lists the NSNs that correspond to this commercial item description. This list may not be indicative of all possible NSNs associated with this document.

Table III. Class, Type, Grade, and unit of issue by NSN.

NSN 6810-00-	Class	Type	Grade	Unit of Issue
068-8866	B	II	FF	250 lb drum
244-4862	A	I	D	500 lb drum
256-8327	A	I	F	10 lb can
264-6700	A	II	X or WW	1 lb can
951-2293	A	II	WW	1 lb jar

7.4 Source of documents.

7.4.1 Copies of ASTM Standards can be purchased from ASTM International:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

https://www.astm.org.

7.4.2 Copies of FED-STD-313 can be obtained from https://quicksearch.dla.mil.

7.4.2 The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC, 20402. Electronic copies CFR documents can be obtained from https://gov.ecfr.io/cgi-bin/ECFR.

7.4.3 The FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of FAR documents may be obtained from https://www.acquisition.gov/.

7.5 Key Words.

Lump
Powdered

MILITARY INTERESTS:

Custodians:
Army – EA
Navy – OS
Air Force – 68
DLA – GS

Reviewers:
Army – MD1, MI

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - 10FTE

Preparing Activity:
DLA – GS3

(Project 6810-2019-004)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.