[INCH-POUND]
A-A-59154
February 28, 1998
SUPERSEDING
KKK-L-1086D
October 15, 1991

COMMERCIAL ITEM DESCRIPTION

LOADER, SCOOP TYPE, FULL TRACKED

The General Services Administration has authorized the use of this Commercial Item Description by all federal agencies.

1. SCOPE. This Commercial Item Description (CID) covers diesel-engine-driven, hydraulically operated, crawler-type, front end loaders. The loaders are intended to be used for digging, lifting, transporting, dumping, and other grading operation over sloping and rough terrain.

2. CLASSIFICATION. The loaders shall be of the following styles, classes, and sizes as specified (see 7.2).

Style A = ROPS with canopy.
Style B = Fully enclosed ROPS cab.

Class 1 = With a General Purpose bucket.
Class 2 = With a Multipurpose bucket.

Size L 1 = 1 yd^3 (76 m^3) rated capacity
Size L 1.25 = 1.25 yd^3 (.96 m^3).
Size L 1.5 = 1.5 yd^3 (1.15 m^3).
Size L 2 = 2 yd^3 (1.53 m^3).
Size L 2.5 = 2.5 yd^3 (1.91 m^3).
Size L 3 = 3 yd^3 (2.29 m^3).
Size L 3.75 = 3.75 yd^3 (2.87 m^3).

Notes: 1. The Roll Over Protective Structure (ROPS) shall conform to SAE J1040.
2. Loader buckets shall be furnished with easily replaceable teeth.
3. The rated capacity shown in cubic yards (yd^3) or cubic meters (m^3) is the nominal heaped capacity measured in accordance with SAE J742.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may be improve this document should be sent to: Commanding Officer (Code 15E2), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301.

AMSC N/A FSC 3805

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS

3.1 Standard commercial product. The loader shall, as a minimum, be in accordance with the requirements of this CID and shall be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this CID but which are a part of the manufacturer's standard commercial product, shall be included in the loader being furnished. A standard commercial product is a product which has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.2 Performance.

3.2.1 Minimum horse power. The loader shall have sufficient horse power (kilowatt) to operate continuously for the intended use (see 1.) When operating over a flat or sloped undisturbed soil (bucket positioned at optimum angle for digging), the loader shall dig and scoop a full bucket load without engine stalling or the hydraulic components showing any evidence of failure.

3.2.2 Tipping load. A loader furnished with the specified class of bucket shall meet the tipping load in accordance with SAE J818; material with a density of approximately 3,000 pounds per cubic yards (1780 kilograms per cubic metre).

3.2.3 Environmental conditions. Unless otherwise specified (see 7.2), the loader shall be capable of being stored, started, and operated efficiently at any elevation and ambient temperature from minus 20 to plus 120 degrees Fahrenheit (^{o}F) or from minus 29 to plus 49 degrees Celsius (^{o}C).

3.3 Allied equipment. All necessary hardware or components required for quick change over to install the applicable allied equipment shall be furnished.

3.3.1 Forklift assembly. When specified (see 7.2), a front mounted forklift assembly shall be furnished. The fork attachment shall have a load capacity of not less than 5,000 pounds (2268 kilograms). The forks tines shall be not less than 42 inches (1067 millimetre (mm)) long. Distance between forks shall be adjustable over the width of the carriage.

3.3.2 Backhoe assembly. When specified (see 7.2), the loader shall be furnished with a rear mounted, self-contained backhoe assembly, complete with operator station and controls. The backhoe shall have a reach of not less than 12 feet (3.66 metre) and furnished with a 24 inches (610 mm) bucket with replaceable teeth.

3.3.3 Ripper assembly. When specified (see 7.2), a rear mounted, hydraulically operated parallelogram ripper assembly shall be furnished. The ripper shall have not less than five shank pockets and five teeth.

3.4 Optional accessories. The manufacturer's optional accessories shall include, but not limited, to the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

3.4.1 Operators compartment. The operators compartment for both style A and style B, shall include an upholstered (weather-proof material) adjustable operator's seat, complete with type-1 seat belt conforming to SAE J386.

3.4.1.1 Style A. The style A operator's compartment shall be furnished with metal canopy top. The instrument panel shall be protected with lockable panel guard.

3.4.1.2 Style B. The style B operator's compartment shall, as a minimum, be furnished with lockable door(s), heater/defroster, powered front and rear windshield washers/wipers, left and right side rear view mirrors, and tinted safety glass. When specified (see 7.2), an air conditioned cab shall be furnished. Refrigerant with ozone depleting properties shall not be used in the air-conditioning unit.

3.4.2 Transmission. A full power shift torque converter, or direct drive, or hydrostatic transmission shall be as specified (see 7.2).

3.4.3 Track grouser. A standard track or a wide track grouser shall be as specified (see 7.2).

3.4.4 Hydraulic valves. A 2-spool or a 3-spool hydraulic valve as specified (see 7.2).

3.4.5 Gauges and indicators. Illuminated gauges for fuel tank level, engine coolant temperature, engine oil pressure, transmission oil temperature, and warning indicator for alternator low voltage, low transmission oil pressure, and transmission oil filter restriction shall be furnished. An electrical monitor system with audible and visible warnings are acceptable in lieu of gauges.

3.4.6 Lights. Two front working/driving lights and one rear working light.

3.4.7 Drawbar. A standard drawbar or hitch point shall be provided when the loader is not furnished with rear mounted allied equipment.

3.4.8 Additional options. Additional options, not included above, shall be as specified (see 7.2).

3.5 Special requirements.

3.5.1 Lifting and tiedown attachments. The lifting and tiedown attachments shall conform to manufacturer' standard or to MIL-STD-209 (type II or type III) as specified (see 7.2). A nonferrous transportation plate shall be provided and mechanically attached to the loader. Transportation plate shall be inscribed with a diagram showing the attachments and lifting slings, the capacity of each attachment, and the required length and size of each sling cable. A silhouette of the item furnished showing the center of gravity shall be provided in the transportation plate. Tiedown attachments may be identified by stenciling or other suitable marking. Tiedown marking shall clearly indicate that the attachments are intended for the tiedown of the loader on the carrier when shipped.

3.5.2 Color. The color of finished coat shall be as specified by the procuring activity (see 7.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

3.5.3 Identification plate (Loader). The identification plate shall conform to the manufacturer's standard plate or to a government furnished plate as specified (see 7.2). The contractor shall stamp all necessary data in the blank spaces of the plate provided for that purpose, and securely affixed to each loader in a conspicuous place with nonferrous screws, rivets, or bolts not less than 0.125 inch (3 mm) in diameter. The applicable nomenclature contained in the current contract item description shall be placed in the top blank.

3.5.4 Identification marking (Allied equipment). Identification on furnished allied equipment shall be permanently marked directly on the equipment or on a corrosion-resisting metal plate. Identification shall include the manufacturer's model, serial number, name and trademark.

3.5.5 Warning plate. When the noise level at the operators position exceeds 85 dB(A), measured in accordance with SAE J919, a corrosion resistant warning plate shall be permanently affixed to the loader in a conspicuous location. The warning plate shall read "CAUTION: HEARING PROTECTION REQUIRED WHILE OPERATING THIS MACHINE."

3.5.6 Engine fuel. When specified (see 7.2), the loader shall be capable of running on JP-4 fuel without detrimental effect to the engine and components.

4. REGULATORY REQUIREMENTS.

4.1 Recovered materials. The offeror/contractor is encourage to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product conformance. The loader (with applicable allied equipment) shall meet the salient characteristics of this CID, conform to the producer's own drawings, specification, standards, and quality assurance practices, and be the same unit offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Market acceptability. The contractor shall furnish the contracting officer, for acceptance, satisfactory evidence of commercial market acceptability for the same loader size. The evidence shall include, but not limited to, the number of years the same size and model (with or without the specified optional accessories) was offered to commercial market and the number of units sold in the past 2 years from the date of the contract or order.

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Source of documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

7.1.1 Copies of specifications and standards required by suppliers in connection with specific procurement functions shall be obtained from the procuring activity or as directed by the contracting officer.

7.1.2 The Federal Acquisition Regulation (FAR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.1.3 The SAE Standards and Recommended Practices is available from the Society of Automotive Engineers, Suite 304, Akron, OH 44313.

7.2 Ordering data.

a. Title, number, and date of this CID.
b. Style, class, and size of loader required (see 2.).
c. When environmental condition is other than as specified (see 3.2.4).
d. When a forklift carriage is required (see 3.3.1).
e. When a backhoe assembly is required (see 3.3.2).
f. When a ripper assembly is required (see 3.3.3).
g. When an air conditioned cab is required (see 3.4.1.2).
h. When a torque converter, direct drive, or hydrostatic transmission is required (see 3.4.2).
i. When a standard track or wide track grouser is required (see 3.4.3).
j. When a 2-spool or a 3-spool hydraulic valve is required (see 3.4.4).
k. Additional options to be furnished (see 3.4.8).
l. When lifting and tiedown attachments conforms to manufacturer's standard or to MIL-STD-209, type II or type III (see 3.5.1).
m. Color of finish coat required (see 3.5.2).
n. When identification plate shall be manufacturer's standard or government furnished plate (see 3.5.3).
o. When loader shall run on JP-4 fuel (see 3.5.6).

7.3 Part Identification Number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor. The PIN are created as follows:

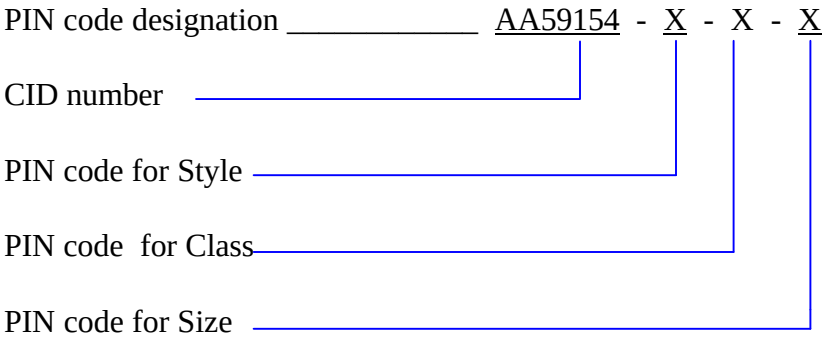

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

PIN codes:	A = Style A	1 = Class 1	A = Size L 1
	B = Style B	2 = Class 2	B = Size L 1.25
			C = Size L 1.5
			D = Size L 2
			E = Size L 2.5
			F = Size L 3
			G = Size L 3.75

7.4 National Stock Numbers (NSN's). The following is a list of NSN's assigned which correspond to this CID. This list may not be indicative of all the NSN's associated with this CID.

3805-00-131-4620 (Style A, Class 2, Size L 1)
3805-00-278-1245 (Style A, Class 2, Size L 1)
3805-01-048-6324 (Style B, Class 2, Size L 2.5)
3805-01-048-7857 (Style A, Class 2, Size L 2.5)

7.5 Supersession data. This CID replaces Federal Specification KKK-L-1086D, dated October 15, 1991.

7.6 Classification cross reference. The classification changes between this CID and the superseded specification is as follows:

A-A-59154	KKK-L-1086D
Style A	Not designated
Style B	Not designated
Class 1	Not designated
Class 2	Not designated
Size L 1	Size L 1
Not designated	Size L 1 1/8
Size L 1.25	Size L 1 ¼
Size L 1.5	Size L 1 ½
Size L 2	Size L 2
Not designated	Size L 2 ¼
Size L 2.5	Size L 2 ½
Size L 3	Size L 3
Size L 3.75	Size L 3 ¾

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - YD1
Air Force - 99

Review Activities:
Navy - MC
Air Force - 84
DLA -CC

CIVIL AGENCY COORDINATING ACTIVITIES:
GSA -FSS

Preparing Activity:
Navy - YD1

(Project 3805-0015)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:04Z
Check the source to verify that this is the current version before use.