[INCH-POUND]

A-A-59159
March 27, 1998
SUPERSEDING
MIL-H-28596B
14 October 1981

COMMERCIAL ITEM DESCRIPTION

HOSE AND HOSE ASSEMBLY, RUBBER, STEAM

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description covers braided or wrapped rubber hose for conveyance of saturated steam.

2. CLASSIFICATION.

2.1 Classification. The hoses shall be of the following types and grades, as specified (see 7.1).

Type I – Braided wire reinforced construction.

Grade A – multiple braid reinforcement: for working pressure and temperatures up to 200 pounds per square inch gage (psig) and 388 degrees F.

Grade B – Single braid reinforcement: for working pressures and temperatures of up to 100 psig and 320 degrees F.

Type II – Wrapped fabric construction; for working pressures and temperatures up to 75 psig and 320 degrees F.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may be improve this document should be sent to: Commanding Officer (Code 15E2), Naval Construction Battalion Center, 1000 23rd Avenue, Port Hueneme, CA 93043-4301.

AMSC N/A FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description.

Type I: hose shall be suitable for heavy-duty, high-pressure, shock-resistant, flexible steam applications.

Grade A hose shall be available in the following sizes (ID in inches): 0.5, 0.75, 1, 1.25, 1.5, 2, 2.5, and suitable for working pressure and temperatures up to 200 psig and 388 ^{0}.

Grade B hose be available in the following sizes (ID in inches): 0.5, 0.75, 1, and be suitable for working pressure and temperatures up to 300 psig and 320 degrees F.

Type II: hose shall be suitable for general service as a steam hose for working pressures up to 75 psig. and be available in the following sizes (ID in inches) 0.5, 0.75, 1, 1.25, 1.5, and 2.

Hose length shall be 50 foot (± 1 percent) exclusive of the couplings unless otherwise specified in contract or order.

3.2 Construction. The hose shall be constructed of a heat-resistant, abrasion-resistant, and ozone-resistant cover. Type I hose shall have reinforcement to withstand shock, vibration, and flexing. Treatment may be applied to the reinforcement to increase the adhesion to the heat resistant tube. The construction specified represents minimum requirements and is not intended to bar hose having improved properties which exceed the requirements of this specification.

3.3 Couplings. When specified, the hose shall be fitted with couplings. Couplings shall be of the long shank, interlocking clamp type, having fingers or lugs on each half of the clamp to grip a collar on the stem. The coupling shall consist of a stem with a serrated or grooved shank end, a raised continuous collar, and a two-part interlocking-type clamp with clamping bolts. Hose smaller than 1-inch ID shall be provided with not less than two clamping bolts; all other couplings shall have four clamping bolts. Two male couplings or one female and one male coupling shall be provided, as specified in the contract or order. Components, except washers and soft metal contact surface inserts, shall be protected with a corrosion-resisting coating.

3.4 Identification marking. Each length of hose shall be marked in a color that contrasts with the color of the hose cover. Marking shall be accomplished either by in-laying a rubber or suitable material brand or by applying a suitable composition ink, bonding the marking onto the cover so that the marking cannot be removed except by mechanical means. The marking shall consist of the manufacturer’s name or trademark, the quarter and year of manufacturer, the working pressure, and the word “steam”. An alternative method of marking may be by the application of a continuous embossed strip along the entire length, vulcanizing the hose and by the subsequent removal of the strip, leaving a continuous relief identification area. Identification shall be the manufacturer’s name or trademark, the working pressure, and the word “steam” repeated at maximum intervals of 36 inches. When the marking is accomplished by this alternative method, no color contrast is required. Letters shall be at least 0.25 inch high.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

3.4.1 Marking tag. A marking tag shall be wired near each end fitting (two tags per length of hose), advising users of all safety precautions to be followed in the use of the hose.

The following shall be included on the tag:

a) Hose clamps shall be checked for proper application and shall be re-tightened, as necessary, prior to being placed into service. Be sure that clamps are interlocked over the collar on the nipple and that each clamp half interlocks with the other.
b) Hose clamps shall be tightened after the first several hours of steaming of the hose and periodically thereafter.
c) The importance of taking up evenly on all bolts to prevent cocking of the hose clamp shall be emphasized.
d) Other operational and maintenance suggestions considered necessary by the hose and end-fitting manufacturers.

4. REGULATORY REQUIREMENTS.

4.1 Metric products. Products manufactured to metric dimension will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of ASTM SI-10 (IEEE/ASTM SI-10), and all other requirements of this Commercial Item Description including form, fit and function are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Product Conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

6. PACKAGING.

6.1 Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Intended use. Hose and hose assembly covered by this specification are intended for general steam applications and not to convey steam into food service equipment.

7.1.1 Type I. Type I hose is to be suitable for heavy-duty, high-pressure, shock-resistant, flexible applications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

7.1.2 Type II. Type II hose shall be suitable for general service as a steam hose for working pressures up to 75 psig.

7.2 Part Identification Number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor. The PINs to be used for the items acquired to this description are created as follows:

Hose assembly

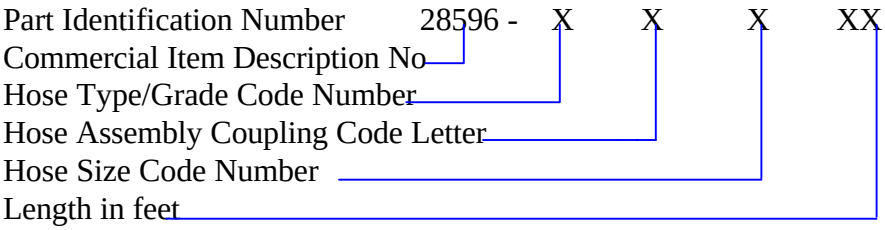

Hose Type/Grade Code Number :
1=Type I Grade A
2=Type I Grade B
3=Type II

Hose Assembly Coupling Code Letter:
A= Male (first end), Female (2nd end)
B= Male (first end), Male (2nd end)

Hose Size Code Number:
1= 0.5
2= 0.75
3= 1
4= 1.25
5= 1.5
6= 2
7= 2.5

7.3 Ordering data. Acquisition documents shall specify the following:

a) Title, number, and date of this commercial item description.
b) Type and grade of hose required.
c) When couplings are required, type of couplings, and material.
d) Length and size of hose required.
e) Level of preservation-packaging and level of packing required.
f) Contracting officer may request proof of certification of commercial item prior to first contract delivery.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

7.4 Subject term (key word) listing
steaming
clamps
collar
nipple
saturated

7.5 ASTM documents are available from ASTM, 100Barr Harbor Dr., W. Conshocken, PA 19428-2959.

7.6 IEEE documents are available from the institute of Electrical and Electronics Engineers, IEEE Service Center, 445 Hoes Lane, P.O. Box 1331, Piscataway, NJ 08855-1331.

MILITARY INTERESTS:

Custodians:
Navy - YD1
Air Force - 99
Army - AT

Preparing Activity:
Navy - YD1

(Project 4720-0179)

Review Activities
Navy - SH
Air Force - 82
DLA - CC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.