INCH-POUND
A-A-59166A
23 June 2014
Superseding
A-A-59166
16 March 1998

COMMERCIAL ITEM DESCRIPTION

COATING COMPOUND, NONSLIP (FOR WALKWAYS)

The General Services Administration has authorized the use of this commercial item description as a replacement for Type I and Type II of MIL-W-5044 for all federal agencies.

1. SCOPE. This Commercial Item Description covers nonslip compound used for walkways on exterior aircraft surfaces.

2. CLASSIFICATION. The walkway compound shall conform to the following types and sizes as specified (see 7.2).

2.1 Type.	Type I	Smooth texture (without grit)
	Type II	Rough texture (with grit)

2.2 Size.	1 Quart
	1 Gallon

3.0 SALIENT CHARACTERISTICS.

3.1 Compound material composition. The compound shall have no adverse effect on the health of the personnel when used for its intended purpose. The compound shall not contain any hazardous ingredient as defined in FED-STD-313, nor shall it contain any chemical listed in the current report of known carcinogens of the National Toxicology Program. Specifically, the compound shall not contain benzene, chlorinated solvents or ethylene base glycol ethers and their acetates.

3.1.1 Compound material composition. The volatile organic content shall not exceed 420 gram/liter when tested in accordance with ASTM D3960.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: WR-ALC - AFLCMC/WNZ, 235 Byron Street Suite 19A, Robins AFB, GA 31098-1670. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil/ .

AMSC N/A FSC 8010

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

3.1.2 Type I shall be a minimum of 50 percent total solids. Type II shall be a minimum of 60 percent total solids.

3.1.3 The grit used for the Type II compound shall remain suspended and shall not migrate through the coating and cause abrasions to the surface of the underlying metal.

3.2 Color. The walkway compound shall be furnished in colors conforming to FED-STD-595 or as specified in the contract or order (see 7.1 and 7.2).

3.2.1 Color identification. The color identification number shall be formatted in accordance with FED-STD-595.

3.3 Drying times. A coating of the compound shall be sufficiently dry in a maximum of 30 minutes to accept recoating. A single coat of the compound shall be completely dry in a maximum of 6 hours. During and after drying the compound coating shall not crack, separate, lose adhesion, discolor, or deteriorate.

3.4 Consistency. The compound, after hand stirring for no more than 5 minutes, shall have a uniform fluid to solid consistency. There shall be no evidence of surface skins. Settled solids shall easily be reincorporated, upon stirring, to form a uniform mixture. The compound shall maintain a hand brushable consistency.

3.5 Wear resistance. The compound, coating a walkway, shall be resistant to wear as specified in 5.3.

3.6 Adhesion and flexibility. The walkway compound shall adhere to metal surfaces in temperatures from -60ºF to +200ºF. The walkway compound, after applied to a surface, shall not crack, soften, blister, discolor, separate, or deteriorate when bent through an arc of 180º around a 2 inch mandrel within the specified temperature range.

3.7 Fuel and fluid resistance. The walkway compound, after application, shall be resistant to aircraft lubricants, hydraulic fluids, hydrocarbon fuels JP-4, JP-5, and JP-8, and deicing fluids.

3.8 Shelf life. A new container of walkway compound shall be satisfactory for use after one year of storage in a dry sheltered area at room temperature or 75ºF ±5ºF.

4.0 REGULATORY REQUIREMENTS

4.1 Material Safety Data Sheet (MSDS). The offeror/contractor shall submit an MSDS with each shipment of walkway compound. The MSDS shall be prepared in accordance with FED-STD-313.

4.2 Recycled recovered materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with 23.403 of the Federal Acquisition Regulation (FAR). However, used, rebuilt, or refurbished items shall not be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

5.0 PRODUCT CONFORMANCE PROVISIONS

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be specified in the contract.

5.2 Market acceptability. One of the market acceptability criteria specified in 5.2.1, 5.2.2, or 5.2.3 are necessary to document the quality of the product to be provided under this CID.

5.2.1 The company producing the item must have been producing a product meeting the requirements of this CID, for at least 2 years.

5.2.2 The company, offering the item, must have sold 1000 units, meeting this CID, in the commercial market place or to the Government over the past 2 years.

5.2.3 The company producing the item must submit a sample of their product from their own production. The product sample shall meet the requirements of this CID.

5.3 Wear resistance. The walkway coating shall withstand 5000 wear cycles when tested as specified in FED-STD-141, method 6192.1 (see 3.5).

6. PACKAGING.

6.1 Preservation, packing and marking shall be as specified in the contract or order.

7.0 NOTES.

7.1 Part Identifying Number (PIN). The following PIN is developed for Government purposes and use with this CID. It does not constitute a requirement for the contractor:

Example PIN – AA59166-1G30318

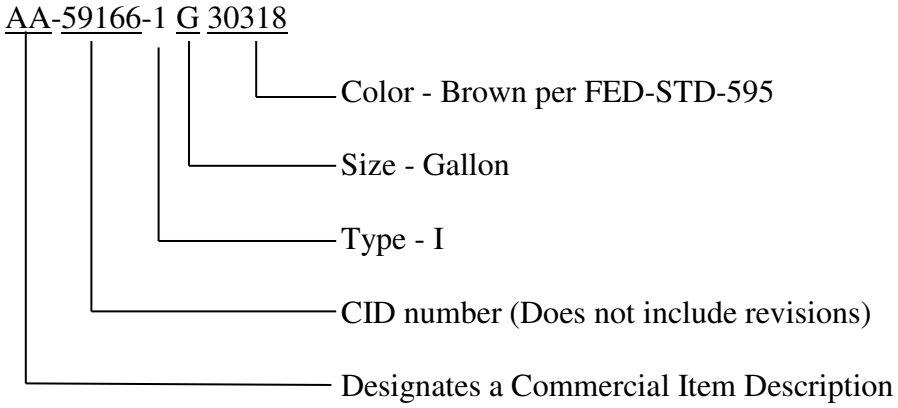

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

Type: 1 = Type I
2 = Type II

Size: Q = Quart
G = Gallon

Color:

NUMBER		COLOR
25414	=	Blue
26270	=	Gray
30318	=	Brown
36081	=	Gray
36231	=	Gray
36251	=	Gray
36440	=	Light Gray
37038	=	Black
37875	=	White
CLEAR	=	Transparent or Neutral

7.2 Ordering data. Procurement documents should specify the following:

Title, number, and date of this CID
Type (see 2.1)
Size (see 2.2)
Color number (see 3.2)
Quantity

7.3 National Stock Numbers (NSNs). The following is a list of assigned NSNs, which correspond to this CID. The list may not be indicative of all possible NSNs associated with this CID.

NSN	Type	Size	FED-STD595 Color
8010-00-141-7838	II	Gallon	34084
8010-00-141-7840	I	Gallon	36440
8010-00-141-7842	II	Gallon	36440
8010-00-142-6525	II	Gallon	37038
8010-00-151-4903	II	Quart	25414
8010-00-202-1251	I	Gallon	37875
8010-00-202-2499	I	Gallon	36081
8010-00-599-9201	II	Gallon	36081
8010-00-641-0426	II	Gallon	36231
8010-00-641-0427	II	Gallon	37038
8010-00-641-0428	I	Gallon	36231
8010-00-641-0429	I	Gallon	37038
8010-01-106-7786	I	Gallon	30318
8010-01-280-5130	II	Gallon	36251
8010-01-382-3709	II	Gallon	26270

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

7.4 Source of documents.

7.4.1 Department of Defense and Federal documents may be obtained at https://assist.dla.mil or from the Document Automation and Production Service, Bldg 4D, 700 Robbins Avenue, Philadelphia PA 19111-5094.

7.4.2 FAR may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of the FAR may be obtained from www.acquisition.gov/far/.

7.4.3 ASTM standards may be obtained from ASTM International, 100 Barr Harbor Drive, P.O. Box C700, West Conshohocken, PA 19428-2959. Electronic copies of ASTM standards may be obtained from http://www.astm.org .

7.5 Key Words.

Aircraft surfaces
Rough texture
Smooth texture

Custodian:
Army - AV
Navy - AS
Air Force -84

Preparing activity:
Air Force - 84

Reviewer:
Army - MI
Navy - SH
Air Force – 99

Agent:
Air Force – 99

Project 8010-2014-003

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.