INCH-POUND

A-A-59166B
April 29, 2025

SUPERSEDING
A-A-59166A
June 23, 2014

COMMERCIAL ITEM DESCRIPTION

COATING COMPOUND, NONSLIP (FOR WALKWAYS)

The General Services Administration has authorized the use of this commercial item description as a replacement for Type I and Type II of MIL-W-5044 for all federal agencies.

1. SCOPE. This Commercial Item Description (CID) covers nonslip compound used for walkways on exterior aircraft surfaces.

2. CLASSIFICATION. The walkway compound shall conform to the following types and sizes as specified (see 7.3).

2.1 Type. Type I Smooth texture (without grit)
Type II Rough texture (with grit)

2.2 Size. 1 Quart
1 Gallon

3. SALIENT CHARACTERISTICS.

3.1 Compound materials composition. The compound shall have no adverse effect on the health of the personnel when used for its intended purpose. The compound shall not contain any hazardous ingredient as defined in FED-STD-313, nor shall it contain any chemical listed in the current report of known carcinogens of the National Toxicology Program. Specifically, the compound shall not contain benzene, chlorinated solvents or ethylene base glycol ethers and their acetates.

3.1.1 The volatile organic content shall not exceed 420 gram/liter when tested in accordance with ASTM D3960.

3.1.2 Type I shall be a minimum of 50 percent total solids. Type II shall be a minimum of 60 percent total solids.

3.1.3 The grit used for the Type II compound shall remain suspended and shall not migrate through the coating and cause abrasions to the surface of the underlying metal.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to: AFLCMC/EZSS, 2145 Monahan Way, Area B, Bldg 28, Wright-Patterson AFB, OH 45433 or email engineering.standards@us.af.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 8010

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

3.2 Color. The walkway compound shall be furnished in colors conforming to SAE AMS-STD-595 or as specified in the contract or order (see 7.1 and 7.3).

3.2.1 Color identification. The color identification number shall be formatted in accordance with SAE AMS-STD-595.

3.3 Drying times. A coating of the compound shall be sufficiently dry in a maximum of 30 minutes to accept recoating. A single coat of the compound shall be completely dry in a maximum of six hours. During and after drying the compound coating shall not crack, separate, lose adhesion, discolor, or deteriorate.

3.4 Consistency. The compound, after hand stirring for no more than five minutes, shall have a uniform fluid to solid consistency. There shall be no evidence of surface skins. Settled solids shall easily be reincorporated, upon stirring, to form a uniform mixture. The compound shall maintain a hand brushable consistency.

3.5 Wear resistance. The compound, coating a walkway, shall be resistant to wear as specified in 5.3.

3.6 Adhesion and flexibility. The walkway compound shall adhere to metal surfaces in temperatures from -60 to +200 °F. The walkway compound, after applied to a surface, shall not crack, soften, blister, discolor, separate, or deteriorate when bent through an arc of 180 °F around a 2-inch mandrel within the specified temperature range.

3.7 Fuel and fluid resistance. The walkway compound, after application, shall be resistant to aircraft lubricants, hydraulic fluids, hydrocarbon fuels JP-4, JP-5, and JP-8, and deicing fluids.

3.8 Shelf life. A new container of walkway compound shall be satisfactory for use after one year of storage in a dry sheltered area at room temperature or 75±5 °F.

4. REGULATORY REQUIREMENTS.

4.1 Safety Data Sheet (SDS). The offeror/contractor shall prepare and submit a SDS in accordance with FED-STD-313 and meeting the requirements of 29 Code of Federal Regulations (CFR) § 1910.1200.

4.2 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable. In accordance with paragraph 23.107-1 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

5. QUALITY ASSURANCE PROVISIONS.

5.1 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be specified in the contract.

5.2 Market acceptability. One of the market acceptability criteria specified in 5.2.1, 5.2.2, or 5.2.3 are necessary to document the quality of the product to be provided under this CID.

5.2.1 The company producing the item must have been producing a product meeting the requirements of this CID for at least 2 years.

5.2.2 The company, offering the item, must have sold 1000 units, meeting this CID, in the commercial marketplace or to the Government over the past 2 years.

5.2.3 The company producing the item must submit a sample of their product from their own production. The product sample shall meet the requirements of this CID.

5.3 Wear resistance. The walkway coating shall withstand 5000 wear cycles when tested as specified in ASTM D4060 (see 3.5).

6. PACKAGING.


6.1 Packaging. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Part identification number (PIN). The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor.

The following example describes of the PIN for CID A-A-59166.

AA59166-2GXXXXX Example of referenced PIN

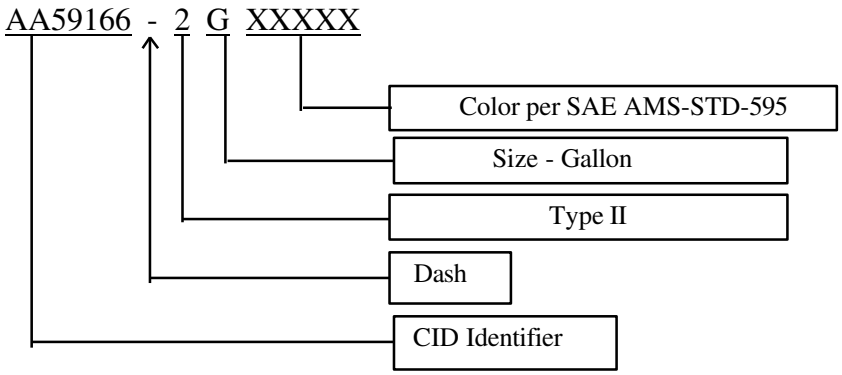

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

Type: 1 = Type I
2 = Type II

Size: Q = Quart
G = Gallon

Color:

NUMBER		COLOR
25414	=	Blue
26270	=	Gray
30318	=	Brown
33446	=	Tan
36081	=	Gray
36231	=	Gray
36251	=	Gray
36320	=	Gray
36440	=	Light gray
37038	=	Black
37875	=	White
CLEAR	=	Transparent or Neutral

7.2 Source of documents.

7.2.1 Government documents. Copies of specifications, standards, and handbooks are available online at https://quicksearch.dla.mil.

7.2.2 ASTM documents. Copies of ASTM documents may be obtained online at https://www.astm.org.

7.2.3 Federal Acquisition Regulations (FAR). Copies of FARs may be obtained online at https://www.acquisition.gov.

7.2.4 Code of Federal Regulations (CFR). Copies of CFRs may be obtained online at https://www.ecfr.gov.

7.2.5 SAE International documents (SAE). Copies of SAEs may be obtained online at https://www.sae.org.

7.3 Ordering data. Procurement documents should specify the following:

Title, number, and date of this CID
Type (see 2.1)
Size (see 2.2)
Color number (see 3.2)
Quantity

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.

7.4 National Stock Numbers (NSNs). The following is a list of assigned NSNs, which correspond to this CID. The list may not be indicative of all possible NSNs associated with this CID.

NSN	Type	Size	SAE AMS-STD-595 Color
8010-00-141-7838	II	Gallon	34088
8010-00-141-7840	I	Gallon	36440
8010-00-141-7842	II	Gallon	36440
8010-00-142-6525	II	Quart	37038
8010-00-151-4903	II	Gallon	25414
8010-00-202-1251	I	Gallon	37875
8010-00-202-2499	I	Gallon	36081
8010-00-599-9201	II	Gallon	36081
8010-00-641-0426	II	Gallon	36231
8010-00-641-0427	II	Gallon	37038
8010-00-641-0428	I	Gallon	36231
8010-00-641-0429	I	Gallon	37038
8010-01-106-7786	I	Gallon	30318
8010-01-280-5130	II	Gallon	36251
8010-01-527-4055	II	Gallon	33446
8010-01-655-6368	II	Gallon	36320
8010-01-710-7656	I	Quart	36231

7.5 Key words.

Aircraft surfaces
Rough texture
Smooth texture

Custodians:
Army - AV
Navy - AS
Air Force - 184

Review activities:
Army - MI
Navy - SH

Preparing activity:
Air Force - 184

Agent:
Air Force - 110

(Project 8010-2025-006)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:05Z
Check the source to verify that this is the current version before use.