MIL-R-82184A(MC)
29 December 1978
SUPERSEDING
MIL-R-82184(MC)
25 April 1968

MILITARY SPECIFICATION

REGULATOR ASSEMBLY, SKID-MOUNTED: 6-INCH

This specification is approved for use by U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a skid-mounted, portable, self-contained regulator assembly.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

W-C-440	- Clips, Electrical, General Specification for.
W-R-550	- Rod, Ground (With Attachments).
QQ-S-781	- Strapping, Steel, and Seals.
TT-S-735	- Standard Test Fluids; Hydrocarbon.
MMM-A-122	- Adhesive, Butadiene Acrylonitrile Base, Medium Solids, General Purpose.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commandant of the Marine Corps, Headquarters Marine Corps, Code LMA-1, Washington, D.C. 20380 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4930

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-S-7916	- Sealing Compound, Thread and Gasket, Fuel, Oil, and Water Resistant.
MIL-W-8604	- Welding of Aluminum Alloys: Process for.
MIL-A-8625	- Anodic Coatings, for Aluminum and Aluminum Alloys.
MIL-E-52798	- Enamel, Alkyd, Camouflage.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-209	- Slinging and Tiedown Provisions for Lifting and Tying Down Military Equipment.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS27183	- Washer, Flat-Round, Steel, Cadmium Plated, General Purpose (in./mm).
MS45904	- Washer, Lock, Internal and External Tooth.
MS51967	- Nut, Plain, Hexagon-Carbon Steel, Cadmium Plated, UNC-2B (in./mm).
MS90725	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Grade 5, Cadmium Plated, UNC-2A.

DRAWINGS

U.S. MARINE CORPS

DL77C5208A0045	- Regulator Assembly, Skid-Mounted, 6-Inch.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM) STANDARDS

ASTM B 173 - Rope-Lay-Stranded Copper Conductors Having Concentric-Stranded Members, for Electrical Conductors.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

HYDRAULIC INSTITUTE

Hydraulic Institute Standards.

(Application for copies should be addressed to the Hydraulic Institute, 2130 Keith Building, Cleveland, OH 44115.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2.1), the contractor shall furnish a sample unit(s) for first article inspection and approval (see 4.4 and 6.3).

3.2 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.4).

3.3 Design and construction. The regulator assembly shall be in accordance with Data List DL77C5208A0045 and as specified herein. These drawings are end product drawings and no deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the regulator assembly. Any data (e.g., shop drawings, layouts, flowsheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

3.3.1 Ground rod assembly. Each regulator assembly shall be furnished with a ground rod conforming to W-R-550, type III, class B, 5/8-inch in diameter except that three 2-foot plus or minus 1/16-inch-long sections, three couplings, and one driving stud shall be furnished in lieu of the specified 3-foot sections, clamps, ground cable, and ground terminal.

3.3.2 Ground wire assembly. Each regulator assembly shall be provided with a ground wire assembly conforming to Figure 1.

3.3.3 Frame. The frame shall be constructed of aluminum and shall incorporate the following design requirements:

a. Shall provide rollover protection in all directions to all components.
b. Shall provide lifting capability for a gross weight of not less than 250 pounds.
c. Shall provide skidding capability.

The design requirements for providing lifting capability shall conform to MIL-STD-209, class 3, type IV. These attachments shall also be capable of being used as towing attachments. The frame shall have storage provisions for ground rod and ground wire assembly. Storage provisions shall prevent loss or damage to ground rod and ground wire assembly during lifting, skidding, and rollover testing (see 4.6.2.4, 4.6.2.5, and 4.6.2.6).

3.3.4 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. Interchangeable parts are defined as two or more like parts possessing such functional and physical characteristics as to be equivalent in performance and durability and capable of being exchanged one for the other without alteration of the parts themselves, or of adjoining parts, except for adjustment and without selection for fit or performance.

3.3.5 Castings and forgings. Cast and forged components of the regulator assembly shall be sound and free from blow holes, hard spots, porosity, and cracks. Castings shall not be repaired, plugged, impregnated, brazed, or burned. All fins and roughness shall be removed.

3.3.6 Metal fabrication. Metal used in the fabrication of the regulator assembly shall be free from kinks, ripples, and sharp bends. The straightening of material shall be done by methods that will not cause injury to the material. Methods of cutting that utilize heat shall not be used for aluminum. Sheared, chipped, and sawed edges shall be free from burrs and slivers. All bends shall be made with controlled means to insure uniformity of size and shape. Precautions shall be taken to avoid overheating, and heated metal shall be allowed to cool slowly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

Boltholes shall be accurately formed and have burrs removed. External surfaces shall be free from sharp edges and corners except where sharp edges or corners are required or where they are not detrimental to safety.

3.3.7 Aluminum welding. Aluminum welding shall be in accordance with MIL-W-8604.

3.3.8 Threaded connections and fasteners. All threaded connections and fasteners shall show no evidence of cross threading, mutilation, or detrimental or hazardous burrs. The length of screws and bolts installed with nuts shall be such that the exposed portion is a minimum of two threads. Maximum lengths shall be limited by the nearest standard screw length. Components shall be attached to the frame with capscrews conforming to MS90725 and nuts confirming to MS51967. Each capscrew used in attaching components to frame shall be provided with a flat washer conforming to MS27183 under the head and a toothed lockwasher conforming to MS45904 under the nut. All threaded fasteners shall be tight and there shall be no relative movement possible between the attached parts. Threaded fasteners shall be sealed with sealing compound conforming to MIL-S-7916.

3.3.9 Cleaning. The regulator assembly shall be cleaned and dried of all cutting oil, grease, residue from tests, dirt, metal chips, and other extraneous material in accordance with MIL-P-116.

3.4 Maintainability. Each component of the regulator assembly shall be accessible for adjustment, maintenance, repair, and replacement without removal of other major components, or the use of special tools.

3.5 Performance characteristics.

3.5.1 Hydrostatic pressure. The regulator assembly shall be capable of withstanding a hydrostatic pressure of not less than 225 pounds-force per square inch (lb_f/in^2) without evidence of leaks, damaged or broken components, and permanent deformation (see 4.6.2.2).

3.5.2 Pressure reducing capability. The regulator assembly shall be capable of reducing the outlet pressure of the fluid to any value from 30 lb_f/in^2 up to and including 100 lb_f/in^2 at any inlet pressure from 30 lb_f/in^2 to 150 lb_f/in^2 and a flow of 600 gallons per minute (gpm) without leaks or malfunction of any component (see 4.6.2.3).

3.5.3 Lifting. The regulator assembly shall be capable of being lifted and quick-dropped without sustaining cracks, stress damage, or permanent deformation (see 4.6.2.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

3.5.4 Skidding. The regulator assembly shall be capable of being skidded without sustaining cracks or permanent deformation (see 4.6.2.5).

3.5.5 Rollover. The regulator assembly shall be capable of being rolled over in any direction without sustaining cracks or permanent deformation (see 4.6.2.6)

3.6 Treatment and painting. All exterior surfaces shall be cleaned, treated, and painted in accordance with MIL-T-704, type B, except that finish coat shall be in accordance with MIL-E-52798 (forest green). In lieu of painting, aluminum surfaces may be anodized in accordance with MIL-A-8625, type optional, class 1. The directional arrow integrally cast on the body of the pressure reducing valve shall be highlighted with a contrasting color in accordance with MIL-T-704.

3.7 Indentification and instruction plates.

3.7.1 Identification marking. Each regulator assembly shall be identified in accordance with MIL-STD-130. The marking shall be applied to the regulator assembly on plates conforming to MIL-P-514, type I, style 1, composition C, of type optional, grade B, class 1 material. The plate shall be attached to the regulator assembly by adhesive, screws, rivets, or bolts in a place where the plate will be visible and legible but will not interfere with the operation and maintenance of the assembly. Adhesive shall conform to MMM-A-122.

3.7.2 Instruction plate. Unless otherwise specified (see 6.2.1), each regulator assembly shall be equipped with an instruction plate conforming to MIL-P-514, type III, composition C, of type optional, grade B, class 1 material. The plate shall include all warnings and cautions describing any special or important procedures to be followed in assembling, operating, or servicing the regulator assembly. The plate shall include the warning "NO SMOKING WITHIN 50 FEET." The plate shall be attached to the regulator assembly with adhesive, screws, rivets, or bolts, in a place where the plate will be visible and legible but will not interfere with the operation and maintenance of the assembly. Adhesive shall conform to MMM-A-122.

3.8 Workmanship. All parts, components, and assemblies of the regulator assembly shall be free from extraneous material such as sand, dirt, pits, sprues, scale, flux, grease, or oils that would render the regulator assembly unsuitable for its intended use. All parts, components, and assemblies of the regulator assembly shall be free from misalinement, incomplete welds, leaks, or other defects that could impair the operation and safety of the regulator assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Component and material inspection (see 4.3).
b. First article inspection (see 4.4).
c. Quality conformance inspection (see 4.5).
d. Packaging inspection (see 4.7).

4.3 Component and material inspection. Components and materials used in the manufacturing, testing, and packaging of the regulator assemblies shall be inspected in accordance with the applicable referenced documents. Nonconformance to the applicable referenced documents shall be cause for rejection.

4.4 First article inspection.

4.4.1 Examination. The first article shall be examined as specified in 4.6.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. The first article shall be tested as specified in 4.6.2.1 through 4.6.2.6. Failure of any test shall be cause for rejection.

4.5 Quality conformance inspection.

4.5.1 Sampling. Sampling shall be in accordance with MIL-STD-105.

4.5.2 Examination. Samples selected in accordance with 4.5.1 shall be examined as specified in 4.6.1. Acceptable quality level (AQL) shall be 1.5 percent defective for major defects and 4.0 percent defective for minor defects.

4.5.3 Tests.

4.5.3.1 Individual. Each regulator assembly shall be tested as specified in 4.6.2.2. Failure of test shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

4.5.3.2 Samples. Samples selected in accordance with 4.5.1 shall be tested as specified in 4.6.2.3 through 4.6.2.6. AQL shall be 2.5 percent defective.

4.6 Inspection procedures.

4.6.1 Examination. The regulator assembly shall be examined for the following defects.

Major

101. Components missing, damaged, or not in accordance with referenced specifications, standards, and drawings.
102. Ground rod missing, damaged, or not as specified.
103. Ground wire assembly missing, damaged, or not as specified.
104. Frame not as specified.
105. Gaskets missing or not as specified.
106. Workmanship not as specified.

Minor

201. Thread sealing compound missing or not as specified.
202. Treatment and painting not as specified.
203. Identification plate not as specified.
204. Instruction plate not as specified.

4.6.2 Tests.

4.6.2.1 Test fluid. Test fluid shall conform to TT-S-735, type III.

4.6.2.2 Hydrostatic pressure. Each regulator shall be tested as follows:

a. Disconnect copper tube from pressure taps on pressure reducing valve and close taps with threaded plugs.
b. Connect the regulator assembly to a source of test fluid, using compatible fittings.
c. Seal the outlet with the dust cap.
d. Fill the regulator assembly with test fluid in a manner to eliminate entrapping air.
e. Position reducing valve adjustment and flow control adjustment to extreme open position.
f. Raise inlet pressure to not less than 225 lb_f/in^2 and maintain this pressure for not less than 5 minutes.
g. During and after test, examine the regulator assembly for evidence of leaks, damaged or broken components, and permanent deformation.
h. Reconnect copper tube to pressure taps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

Nonconformance to 3.5.1 shall constitute failure of this test.

4.6.2.3 Pressure reducing capability. The regulator assembly shall be tested as follows:

a. Connect the regulator assembly to a source of test fluid using compatible fittings. The source must be capable of delivering test fluid at a flow rate of not less than 600 gpm at any pressure from 30 lb_f/in^2 up to and including 150 lb_f/in^2. Rate of flow may be determined by any liquid meter defined in the test code for centrifugal pumps in the Hydraulic Institute Standards.
b. Install one test gage on the upstream side of the regulator assembly and one test gage on the downstream side of the regulator assembly. The test gages shall have a scale range of zero to 200 lb_f/in^2 and an accuracy of 0.25 percent of full scale range at 77° F (25° C). All inlet and outlet test pressures shall be measured by the test gages.
c. Turn the plug cock on the regulator assembly to read the inlet pressure. At zero inlet pressure, if the gage does not read zero, adjust the gage to read zero using the micrometer-type pointer.
d. Turn the plug cock on the regulator assembly to read the outlet pressure. At an inlet pressure of not less than 125 lb_f/in^2 and a flow of not less than 600 gpm, adjust the pressure reducing assembly so that the outlet pressure stabilizes at the following pressures (plus or minus 2 lb_f/in^2):

   (1) 50 lb_f/in^2
   (2) 65 lb_f/in^2
   (3) 85 lb_f/in^2
   (4) 100 lb_f/in^2

e. Reduce the inlet pressure to 85 plus or minus 2 lb_f/in^2. Adjust the pressure reducing assembly and flow control assembly until the outlet pressure stabilizes at not more than 30 lb_f/in^2. Turn the plug cock so that the pressure gage on the regulator assembly will measure the inlet pressure. Vary the inlet pressure from 30 lb_f/in^2 to 125 lb_f/in^2 and return to 85 plus or minus 2 lb_f/in^2. Repeat for 2 additional cycles.
f. At an inlet pressure of 125 lb_f/in^2 plus or minus 2 lb_f/in^2 and a flow of not less than 600 gpm, adjust the flow control assembly and the pressure reducing assembly so that the outlet pressure stabilizes at 65 lb_f/in^2 plus or minus 2 lb_f/in^2.

Nonconformance to 3.5.2 shall constitute failure of this test. Failure to stabilize at any outlet pressure or failure of pressure gage on the regulator assembly to measure inlet and outlet pressures within gage accuracy shall constitute component failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

4.6.2.4 Lifting. The regulator assembly, ballasted to an evenly distributed gross weight of not less than 250 pounds, shall be lifted by the lifting attachments to a height not less than 6 feet and held suspended for not less than 15 minutes. At the end of 15 minutes, the assembly shall be dropped for not less than 4 feet, nor more than 5 feet, and quick-stopped and reexamined. Nonconformance to 3.5.3 shall constitute failure of this test. Upon completion of this test the regulator assembly shall again be hydrostatically tested (see 4.6.2.2).

4.6.2.5 Skidding. The regulator assembly, with the dust cap and plug in place, and the assembly filled with test fluid, shall be towed by the lifting attachment for not less than 400 feet across a hard surface at not less than 5 miles per hour. Nonconformance to 3.5.4 shall constitute failure of this test. Nicks, dents, scrapes, and marred finishes shall not be considered as defects.

4.6.2.6 Rollover. The regulator assembly shall be balanced on one longitudinal edge and then allowed to fall over. The assembly shall then be inspected for damaged or broken components. Nonconformance to 3.5.5 shall constitute failure of this test. Nicks, dents, scrapes, and marred finishes shall not be considered as defects.

4.7 Packaging inspection.

4.7.1 Quality conformance inspection of pack.

4.7.1.1 Unit of product. For the purpose of inspection a completed pack prepared for shipment shall be considered a unit of product.

4.7.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.7.1.3 Examination. Samples selected in accordance with 4.7.1.2 shall be examined for the following major defects. AQL shall be 2.5 percent defective.

107.	Unprotected metal surfaces not preserved as specified for level A.
108.	Containers not as specified for level A or B.
109.	Strapping not as specified for level A.
110.	Marking missing, illegible, incorrect, or incomplete for level A, B, or commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial as specified (see 6.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Unprotected metal surfaces of the regulator assembly requiring the application of a preservative in accordance with the requirements of MIL-P-116 shall be coated with a preservative. The preservative shall be at the option of the contractor but shall conform to the applicable specification listed in, and shall be applied in accordance with, MIL-P-116.

5.1.2 Commercial. The regulator assembly shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2.1).

5.2.1 Level A. Each complete regulator assembly, preserved as specified in 5.1, shall be packed in a close fitting box conforming to PPP-B-601, overseas type, style optional or PPP-B-621, class 2, style optional. Box closure and strapping shall be in accordance with the appendix to the applicable box specification. Strapping shall conform to QQ-S-781, class I, type I or IV, size as applicable. Unless otherwise specified (see 6.2.1), strapping shall be finish B. When specified (see 6.2.1) strapping shall be finish A.

5.2.2 Level B. Each complete regulator assembly, preserved as specified in 5.1, shall be packed as specified in 5.2.1 for level A, except the box shall be domestic type or class as applicable. Box closure shall be in accordance with the appendix to the applicable box specification.

5.2.3 Commercial. Each complete regulator assembly, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packages, intermediate packages, and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The regulator assembly is intended for use in fuel transfer lines to prevent excessive pressure buildup on downhill grades. The regulator assembly is a component of an amphibious fuel system that receives, stores, transfers, and dispenses gasoline, diesel fuel, and jet fuel.

6.2 Ordering data. Procurement documents should specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

6.2.1 Procurement requirements.

a. Title, number, and date of this specification.
b. When first article is required for inspection and approval (see 3.1, 4.4, and 6.3).
c. When instruction plate is not required (see 3.7.2).
d. Level of preservation and packing required (see 5.1 and 5.2).
e. Where other than finish B strapping is required (see 5.2.1).

6.2.2 Data requirements. When this specification is used in a procurement which incorporates a Contract Data Requirements List (DD Form 1423) and invokes the provisions of 7-104.9(n) of Armed Services Procurement Regulations, the data requirements identified below will be developed as specified by an approved Data Item Description (DID) (DD Form 1664) and delivered in accordance with the approved DD Form 1423 incorporated into the contract. When provisions of ASPR-7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph	Data Requirement	Applicable DID
4.4	First Article Inspection Procedures.	DI-T-4901
4.4	First Article Inspection Report.	DI-T-4902
4.5	Production/Acceptance Inspection Procedures.	DI-T-4903
4.6	Inspection System Program Plan.	DI-R-4803
4.6	End Item Final Inspection Report.	DI-R-4809

(Copies of data item descriptions required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

6.3 First article. When a first article is required, it shall be tested and approved under the appropriate provisions of 7-104.55 of the Armed Services Procurement Regulations. The first article should be the first produced item. The first article should consist of one regulator assembly. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examination, test, and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

6.4 Recycled material. It is encouraged that recycled or reclaimed material be used, when practical, as long as it meets the requirements of this specification (see 3.2).

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:

Navy - MC

Project 4930-N217

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

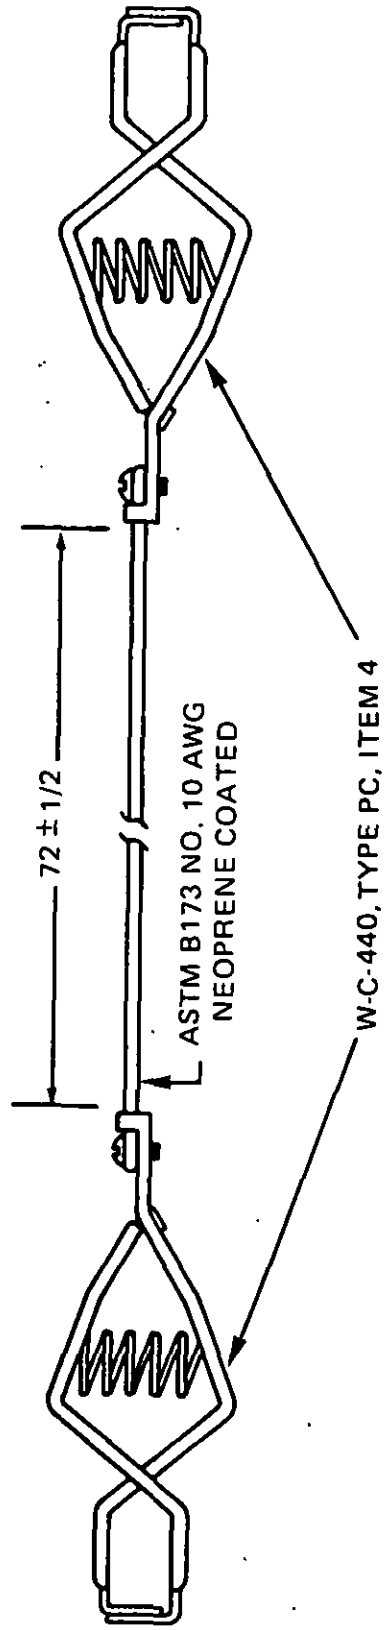


FIGURE 1. Ground wire assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-R-82184A(MC) Regulator Assembly, Skid-Mounted: 6-Inch

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commandant of the Marine Corps
Headquarters U. S. Marine Corps
Code LMA-1
Washington, D. C. 20380

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:54Z
Check the source to verify that this is the current version before use.