INCH-POUND


MIL-PRF-39016/10G
8 November 2004
SUPERSEDING
MIL-PRF-39016/10F
20 July 1988

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, SPDT, LOW LEVEL TO 1.0 AMPERE (SENSITIVE, 40 MILLIWATTS, COIL OPERATE POWER AT 25°C)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the relays described herein shall consist of this specification sheet and the latest issue of MIL-PRF-39016.

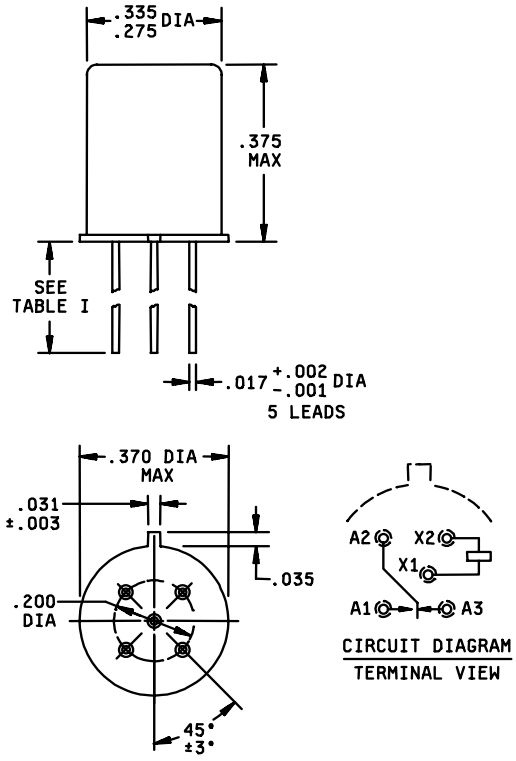


Inches	mm
.001	0.03
.002	0.05
.003	0.08
.017	0.43
.031	0.79
.035	0.89
.200	5.08
.275	6.99
.335	8.51
.370	9.40
.375	9.53

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Terminal numbers shown above for reference only. Numbers do not appear on relays.
5. Coil symbol optional in accordance with MIL-STD-1285.
6. Circuit diagram shown on part is the terminal view.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:34Z
Check the source to verify that this is the current version before use.

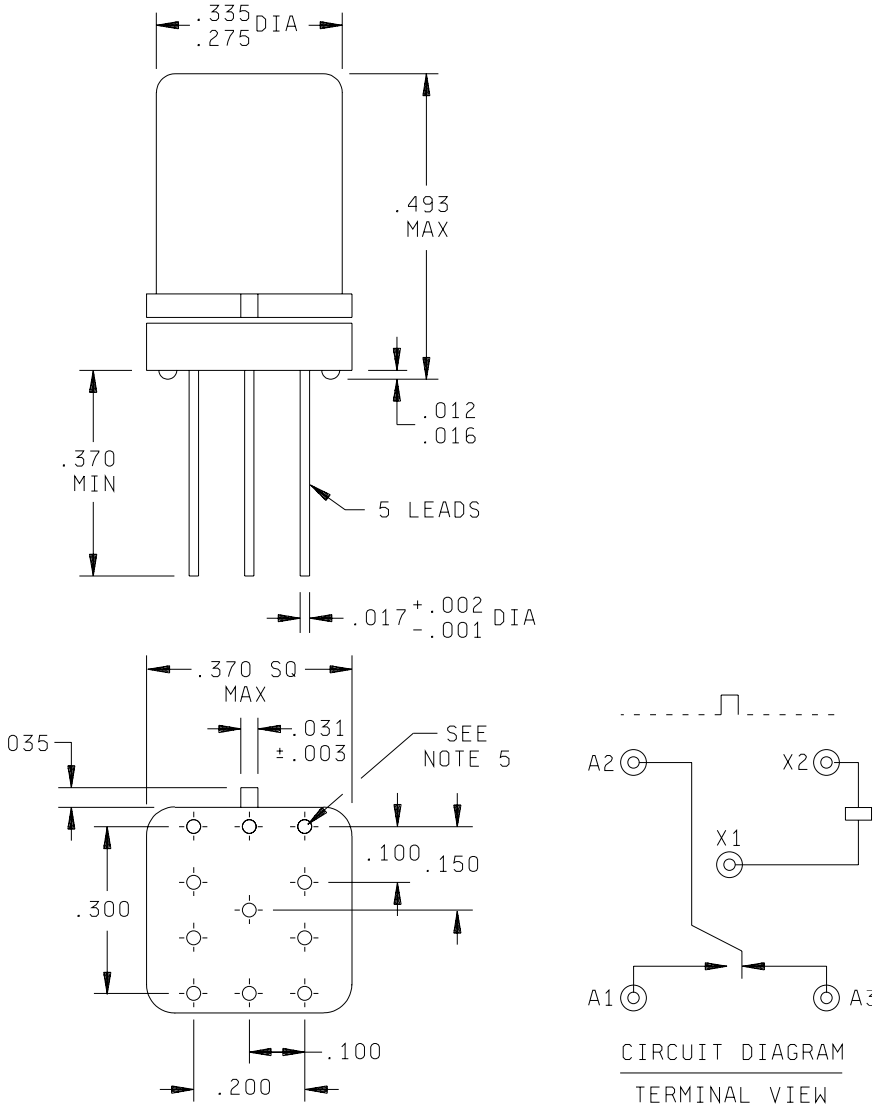

Inches	mm
.001	0.03
.002	0.05
.003	0.08
.012	0.30
016	0.41
.017	0.43
.031	0.79
.035	0.89
.100	2.54
.150	3.81
.200	5.08
.275	6.99
.300	7.62
.335	8.51
.370	9.40
..493	12.52

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Spreader mounting pads shall comply with the requirements of A-A-55485, A-55485/05-004.
5. Dimensions and tolerance shown for the bottom view of the spreader mounting pad are for the center-to-center locations of the holes in the spreader mounting pad.
6. Shape optional within the envelope dimension.
7. Coil symbol optional in accordance with MIL-STD-1285.
8. Terminal numbers shown above for reference only. Numbers do not appear on relay.
9. Circuit diagram shown on part is the terminal view.

FIGURE 2. Dimensions and configuration relay with spreader mounting pad attached.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CONTACT DATA:

Load ratings:

High level (relay case grounded):

Resistive:
1.0 ampere at 28 V dc.
250 milliamperes at 115 V ac 60 and 400 Hz case not grounded.
100 milliamperes at 115 V ac 60 and 400 Hz case grounded.

Inductive load: 0.2 ampere at 28 V dc with 0.32 henry inductance.

Lamp: 0.10 ampere at 28 V dc.

Low level: 10 to 50 μA at 10 to 50 mV dc or peak ac.

Intermediate current: Applicable.

Contact resistance or voltage drop:

Initial: 0.10 ohm maximum (0.125 ohm maximum with spreader mounting pad attached).

High level:

During life: Not more than 5 percent of open circuit voltage.

After life: 0.20 ohm maximum (0.225 ohm maximum with spreader mounting pad attached).

Low level:

During: 33 ohms maximum.

After: 0.15 ohm maximum (0.175 ohm maximum with spreader mounting pad attached).

Intermediate current:

During: 1 ohm maximum.

After: 0.20 ohm maximum (0.225 ohm maximum with spreader mounting pad attached).

Contact bounce: 1.5 milliseconds maximum (applicable to failure rate level “L”).

Contact stabilization time: 2.0 milliseconds maximum (applicable to failure rate levels “M”, “P”, and “R”).

Overload (high level only): Two times rated current. Not applicable to ac load ratings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:34Z
Check the source to verify that this is the current version before use.

COIL DATA: See table I.

Operate time: 4.0 ms maximum over temperature range with rated coil voltage.
Release time: 2.5 ms maximum over temperature range from rated coil voltage.

ELECTRICAL DATA:

Insulation resistance: 10,000 megohms minimum at 500 V dc, except the resistance between coil and case at high temperature shall be 1,000 megohms minimum.

Dielectric withstanding voltage:

	Sea level V rms (60 Hz)	Post intermediate current life test Sea level V rms (60 Hz)	Altitude V rms (60 Hz)
Between case, frame, or enclosure and all contacts in the energized and de-energized positions.	500	500	300
Between case, frame, or enclosure and coils.	500	500	All terminals
Between all contacts and coils.	500	500	to case
Between open contacts in the energized and de-energized positions.	500	375	
Between contact poles.	N/A	N/A	
Between coils of dual coil relays.	N/A	N/A	

ENVIRONMENTAL DATA:

Temperature range: -65°C to +125°C.

Vibration (sinusoidal): MIL-STD-202, method 204. Contact chatter shall not exceed 10 microseconds maximum for closed contacts, and 1 microsecond maximum closure for open contacts.

Vibration (random): MIL-STD-202, method 214, test condition IG. Contact chatter shall not exceed 10 microseconds maximum for closed contacts, and 1 microsecond maximum closure for open contacts. Applicable to qualification and group C testing only.

Shock (specified pulse): MIL-STD-202, method 213, test condition B (75 g's). Contact chatter shall not exceed 10 microseconds maximum for closed contacts, and 1 microsecond maximum closure for open contacts.

Magnetic interference: Applicable.

Resistance to soldering heat: Applicable.

Acceleration: Applicable.

Salt atmosphere (corrosion): In accordance with MIL-STD-750, method 1041.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:34Z
Check the source to verify that this is the current version before use.

PHYSICAL DATA:

Terminal strength: MIL-STD-202, method 211.

Pull test: Test condition A, 1 pound pull.

Bend test: Test condition C, ½ pound load.

Twist test: As specified in MIL-PRF-39016.

Solderability: Applicable.

Dimensions and configuration: See figures 1 and 2.

Weight: 2.84 grams (0.10 ounce) maximum, 3.09 grams (0.109 ounce) maximum with spreader mounting pad attached.

Seal: Hermetic.

Minimum marking: Military part number, “J” with the date code (example J0430), circuit diagram, manufacturer’s name or source code.

LIFE TEST REQUIREMENTS:

High level: 100,000 cycles per relay.

Low level: 100,000 cycles plus 900,000 cycles mechanical life.

Part or Identifying Number (PIN): M39016/10- (dash number from table I and suffix letter designating failure rate level).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:34Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics. 1/

Dash numbers 2/				Coil voltage (V dc) 3/		At 25°C				Over temperature range		
Lead length 1.500 min 4/	Lead length .187 ±.010	Lead length .500 min	Spreader mounting pads (fig. 2) 5/	Rated	Max	Coil resistance ohms ±10%	Specified pickup value (voltage) (V dc)	Specified hold value (voltage) (V dc)	Specified dropout value (voltage) (V dc)	Specified pickup value (voltage) (V dc)	Specified hold value (voltage) (V dc)	Specified dropout value (voltage) (V dc)
017	018	033	041	5.0	8.0	125	2.8	1.4	0.23	3.7	2.0	0.15
019	020	034	042	6.0	11	255	3.5	2.0	0.28	4.5	2.8	0.18
021	022	035	043	12.0	22	1,025	7.0	4.0	0.63	9.0	5.6	0.40
023	024	036	044	26.5	45	4,000	14.2	8.0	1.37	18	10.4	0.89
025	026	037	045	32	57	6,500	18.7	10.6	1.59	24	15	1.0
027	028	038	046	40	75	11,000	23.3	13.3	2.0	30	18.7	1.3
029	030	039	047	9.0	12	630	5.3	3.0	0.54	6.8	4.2	0.35
031	032	040	048	18	24	2,300	10.5	6.0	0.91	13.5	8.4	0.58

1/ Each relay possesses high level and low level capabilities. However, relays previously tested or used above 10 mA resistive at 6 V dc maximum or peak ac open circuits are not recommended for subsequent use in low level applications.
2/ The suffix letter L, M, P, or R, to designate the applicable failure rate level, shall be added to the applicable listed dash number. Failure rate level (percent per 10,000 cycles): L, 3.0; M, 1.0; P, 0.1; R, 0.01. Example, 017L - - - - - -018R.
3/ CAUTION: The use of any voltage less than the rated voltage will compromise the operation of the relay.
4/ 1.500 leads are inactive for new design.
5/ Relays supplied with spreader mounting pads (-041 through -048) shall have the spreader mounting pad rigidly attached.

QUALIFICATION INSPECTION:

Qualification inspection and sample size: See table II.

TABLE II. Qualification inspection and sample size. 1/

Single submission	Group submission	
18 units plus 1 open unit for level L at C = 0 2/ 33 units plus 1 open unit for level M at C = 0 2/ Qualification inspection as applicable	M39016/10-036	18 units plus 1 open unit for level L at C = 0 2/ 33 units plus 1 open unit for level M at C = 0 2/ Qualification inspection as applicable
	M39016/10-033 M39016/10-034 M39016/10-035 M39016/10-037 M39016/10-038 M39016/10-039 M39016/10-040	2 units each PIN Qualification inspection, Q1.

See footnotes following page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:34Z
Check the source to verify that this is the current version before use.

1/ For retention of qualification or extension of qualification to lower failure rate levels, all life test data accumulated on MIL-PRF-39016/11, /16, /21, /25, and /26 may be used in addition to MIL-PRF-39016/10 data. Prior to performance of retention of qualification testing, the relay manufacturer shall preselect the sampling plan.

2/ The number of units required for qualification testing shall be increased as required in Q5, MIL-PRF-39016, if the contractor elects to test the number of units permitting one or more failures. Prior to performance of qualification testing, the relay manufacturer shall preselect the sampling plan.

Initial qualification of relays supplied with spreader mounting pads (-041 through -048) shall be tested as specified below:

Perform the following tests as specified in the qualification inspection table of MIL-PRF-39016, in the order shown below:

Before installation of spreader mounting pad: Screening, visual and mechanical examination (internal), thermal shock, resistance to solvents, vibration (sinusoidal), vibration (random), shock (specified pulse), acceleration, terminal strength, magnetic interference (when specified), capacitance (when specified), coil life (applicable to continuous duty relays only), resistance to soldering heat, salt spray (corrosion), overload (applicable to high level relays only), life, terminal strength, and intermediate current.

After installation of spreader mounting pad, perform the following tests as specified in the qualification inspection table of MIL-PRF-39016, in the order shown below:

Insulation resistance, dielectric withstanding voltage, static contact resistance, specified pickup, hold, or dropout values (voltages), coil resistance, operate and release time, contact dynamic characteristics, coil transient suppression (when specified), solderability, seal, visual and mechanical inspection (external).

Qualification inspection (reduced testing for previously qualified relays) for relays supplied with spreader mounting pads (-041 through -048): Two units of the 26.5-volt rated coil voltage (-044) shall be tested as specified below:

Before installation of spreader mounting pad, perform the following tests as specified in the qualification inspection table of MIL-PRF-39016 in the order shown below:

For failure rate level L only: Screening.

For failure rate levels M, P, and R: Vibration (sinusoidal) test duration shall be 10 minutes, vibration (random), and screening.

After installation of spreader mounting pad, perform the following tests as specified in the qualification inspection table of MIL-PRF-39016 in the order shown below:

Insulation resistance, dielectric withstanding voltage, static contact resistance, specified pickup, hold, and dropout values (voltages), coil resistance, operate and release time, contact dynamic characteristics, coil transient suppression (when specified), solderability, seal, visual and mechanical inspection (external).

Group A testing for relays supplied with spreader mounting pads (-041 through -048), shall be tested as specified below:

Perform seal test immediately, preceding the A2 electrical tests. Relay leads shall be formed and the spreader mounting pad removed before the seal test. After the seal test, the spreader mounting pad shall be rigidly attached to the relay and the remaining group A tests performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:34Z
Check the source to verify that this is the current version before use.

Qualification inspection (reduced testing) and sample size: See table III.

If the relays produced for MIL-PRF-39016/10 are similar in construction and design except for the diodes, and headers, as applicable, to the relays produced for MIL-PRF-39016/11, /16, /21, /25, or /26, then reduced testing for qualification of MIL-PRF-39016/10 relays may be performed concurrent with or subsequent to successful qualification of MIL-PRF-39016/11, /16, /21, /25, or /26. For reduced testing, see table III.

TABLE III. Qualification inspection (reduced testing).

Inspection
2 units each coil voltage – Q1 of qualification inspection table. 1 unsealed sample unit for internal examination.

SUPERSESSION DATA:

Supersession data: See table IV.

TABLE IV. Supersession data. 1/

Superseded PIN M5757/69-	New PIN M39016/10- 2/		Superseded PIN M39016/10-	New part no. M39016/10- 2/
001	019		001	017
002	021		002	018
003	023		003	019
004	025		004	020
005	027		005	021
006	020		006	022
007	022		007	023
008	024		008	024
009	026		009	025
010	028		010	026
011	017		011	027
012	018		012	028
013	029		013	029
014	030		014	030
015	031		015	031
016	032		016	032

1/ Dash numbers -017, -019, -021, -023, -025, -027, -029, and -031 are inactive for new design and are for support of existing designs only.
2/ Complete part number shall contain suffix letter L, M, P, or R to designate failure rate level (see 2/ of table I). A part with any failure rate supersedes the applicable MIL-R-5757 part.

Cross-reference for Government logistical support: See table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:34Z
Check the source to verify that this is the current version before use.

TABLE V. Cross-reference for Government logistical support.

Superseded PIN M5757/69-	New PIN M39016/10-	Support with PIN M39016/10-		Superseded PIN M39016/10-	New PIN M39016/10-	Support with PIN M39016/10-		New PIN M39016/10-	Support with PIN M39016/10-
001	019	019		001	017	017		033	033
002	021	021		002	018	033		034	034
003	023	023		003	019	019		035	035
004	025	025		004	020	034		036	036
005	027	027		005	021	021		037	037
006	020	034		006	022	035		038	038
007	022	035		007	023	023		039	039
008	024	036		008	024	036		040	040
009	026	037		009	025	025		041	041
010	028	038		010	026	037		042	042
011	017	017		011	027	027		043	043
012	018	033		012	028	038		044	044
013	029	029		013	029	029		045	045
014	030	039		014	030	039		046	046
015	031	031		015	031	031		047	047
016	032	040		016	032	040		048	048

Referenced documents. In addition to MIL-PRF-39016, this document references the following:

A-A-55485, /5
MIL-PRF-39016/11, /16, /21, /25, or /26
MIL-STD-202
MIL-STD-750
MIL-STD-1285

Changes from previous issue: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR
Navy - AS, OS, SH
Air Force - 19, 99
NSA – NS

(Project 5945-1249)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:34Z
Check the source to verify that this is the current version before use.