The requirement to comply with changes implemented in this Revision must be completed by 6 months from the date of this document.

INCH-POUND

MIL-PRF-39016/6N
13 August 2026
SUPERSEDING
MIL-PRF39016/6M
w/AMENDMENT 1
27 January 2025

PERFORMANCE SPECIFICATION SHEET

RELAYS, ELECTROMAGNETIC, ESTABLISHED RELIABILITY, DPDT, LOW LEVEL TO 2 AMPERES (0.200-INCH TERMINAL SPACING)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the relays described herein shall consist of this specification sheet and the latest issue of MIL-PRF-39016.

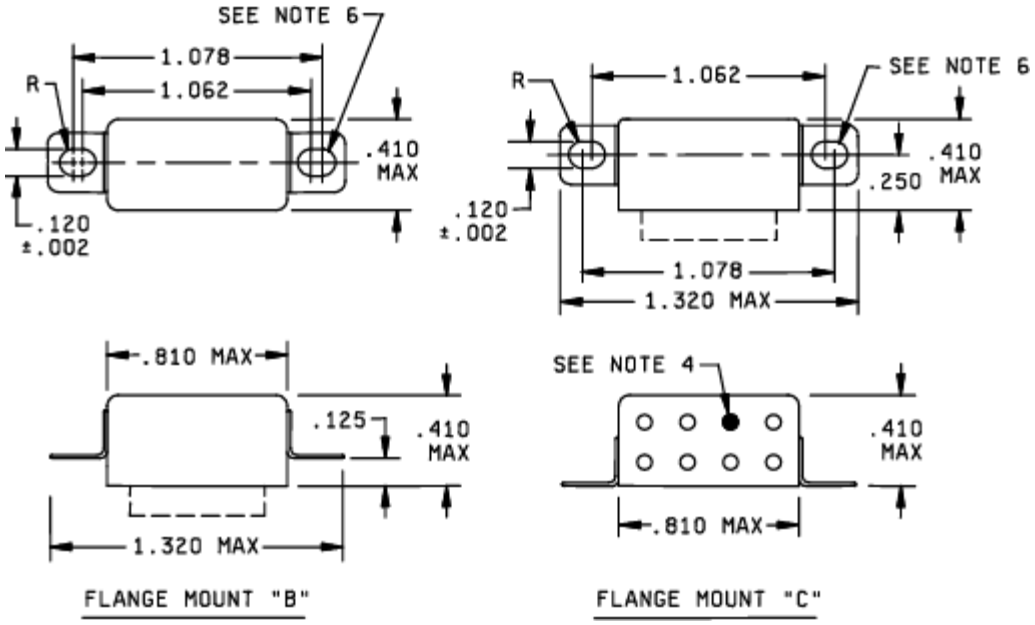


FIGURE 1. Dimensions and configuration.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

FSC 5945

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.



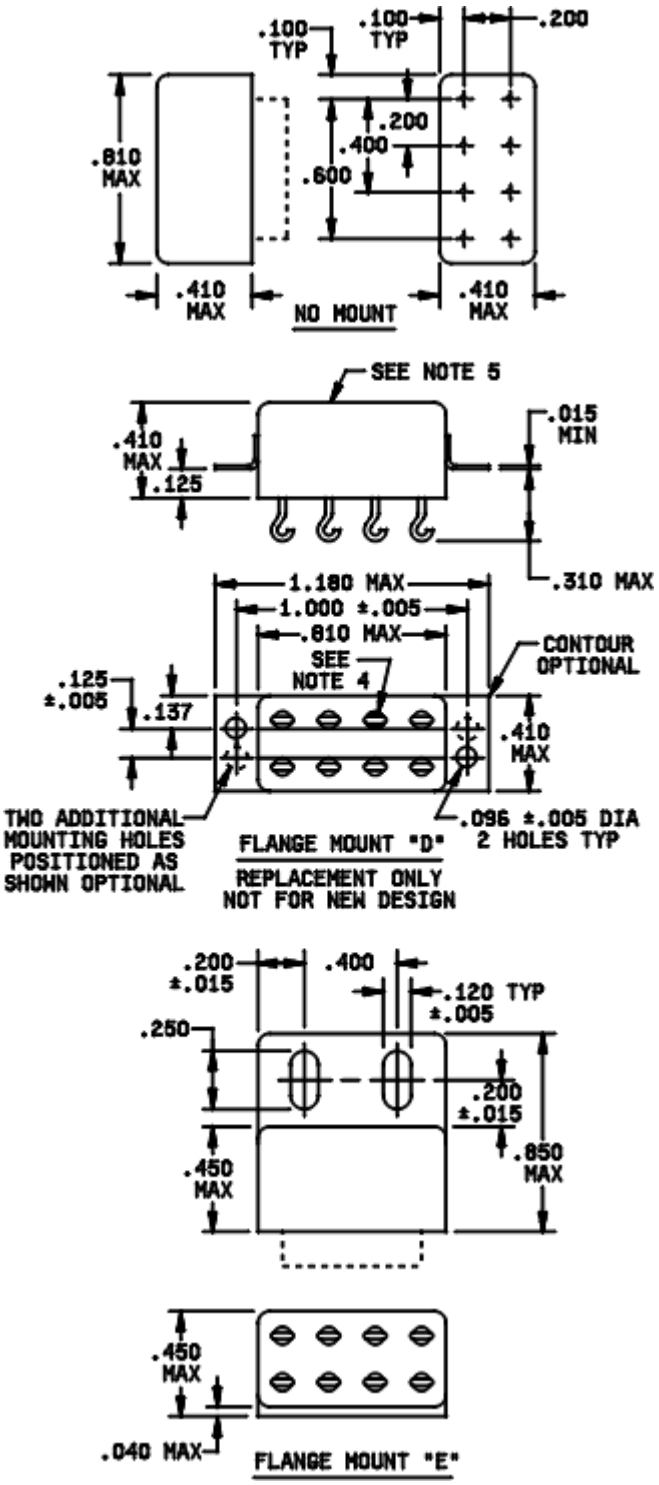


FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.

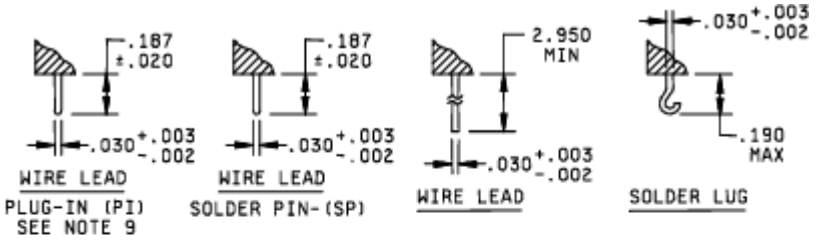



CIRCUIT DIAGRAM
TERMINAL VIEW
DEENERGIZED POSITION

Inches	mm	Inches	mm	Inches	mm
.002	0.05	.125	3.18	.600	15.24
.003	0.08	.137	3.48	.810	20.57
.005	0.13	.187	4.75	.850	21.59
.015	0.38	.190	4.83	1.000	25.40
.020	0.51	.200	5.08	1.062	26.97
.030	0.76	.250	6.35	1.078	27.38
.040	1.02	.310	7.87	1.180	29.97
.096	2.44	.400	10.10	1.320	33.53
.100	2.54	.410	10.41	2.950	74.93
.120	3.05	.450	11.43		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 (0.25 mm).
4. Indicated terminal shall be marked with a contrasting bead.
5. Circuit diagram (including terminal designations) shall be marked on top if legible from the mounted position, otherwise marking surface is optional.
6. Mounting screw head clearances are based on use of .112 diameter fillister head screws.
7. Coil symbol shall be in accordance with MIL-STD-1285.
8. Mounting surface finish shall be compatible with aluminum (duralumin type) as defined by MIL-STD-889.
9. Finish: Finish shall provide the operational, environmental, and interface characteristics to provide a reliable interconnect to gold plated contacts. One system for gold plating that may be used is ASTM-B488, type 3, class 1.25, knoop hardness 130 to 240, nickel underplate 50 to 150 microinches thick. The gold plating shall enable the product to meet the performance requirements of this specification and shall be approved by the qualifying activity.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

CONTACT DATA:

Load ratings:	Type 1 1/	Type 2 1/
High level (relay case grounded):		
Resistive:	2 A at 28 V dc 0.3 A at 115 V ac (60 and 400 Hz)	2 A at 28 V dc 0.1 A at 115 V ac (60 and 400 Hz)
Inductive:	0.75 A at 28 V dc with 0.200 H inductance	0.5 A at 28 V dc with 0.200 H inductance
Lamp:	0.160 A at 28 V dc	0.160 A at 28 V dc
Low level:	10 to 50 μA at 10 to 50 mV dc or peak ac	10 to 50 μA at 10 to 50 mV dc or peak ac
Intermediate current:	Applicable	Applicable

Contact resistance or voltage drop:

High level:

Before life: 0.050Ω maximum.
During life: Not more than 5 percent of open circuit voltage.
After life: 0.100Ω maximum.

Low level:

Before life: 0.050Ω maximum.
During life: 33Ω maximum.
After life: 0.150Ω maximum.

Intermediate current:

Before: 0.050Ω maximum.
During: 1Ω maximum.
After: 0.100Ω maximum.

Contact bounce: 2.0 ms maximum (applicable to failure rate level L).

Contact stabilization time: 2.5 ms maximum (applicable to failure rate levels M, P, and R).

Overload (high level only): Two times rated current.

COIL DATA: See table I.

Operate time: 4 ms maximum over temperature range with rated coil voltage.

Release time: 4 ms maximum over temperature range from rated coil voltage.

1/ Original equipment manufacturers (OEM's) should use type 2 relays whenever the ac resistance or dc inductive load ratings are satisfactory.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.

ELECTRICAL DATA:

Insulation resistance: 10,000 MΩ minimum.

Dielectric withstanding voltage:

	Sea level V rms (60 Hz)	Altitude V rms (60 Hz)
Between case, frame, or enclosure and all contacts in the energized and de-energized positions.	1,000	350
Between case, frame, or enclosure and coil.	500	All terminals
Between all contacts and coil	1,000	to case
Between open contacts in the energized and de-energized positions	500	
Between contact poles	1,000	

ENVIRONMENTAL DATA:

Temperature range: -65°C to +125°C.

Vibration (sinusoidal): MIL-STD-202-204. Contact chatter shall not exceed 10 microsecond maximum for closed contacts, and 1 microsecond maximum closure for open contacts.

Vibration (random): MIL-STD-202-214, test condition IG. Contact chatter shall not exceed 10 microsecond maximum for closed contacts, and 1 microsecond maximum closure for open contacts. (Applicable to qualification and group C testing only).

Shock (specified pulse): MIL-STD-202-213, test condition C (100 G). Contact chatter shall not exceed 10 microsecond maximum for closed contacts, and 1 microsecond maximum closure for open contacts.

Magnetic interference: Applicable.

Resistance to soldering heat: Applicable.

Acceleration: Applicable.

PHYSICAL DATA:

Terminals: See figure 1 and table I.

Terminal strength: 3 ±0.3 pounds pull.

Terminal solderability: Applicable.

Terminal twist test: Applicable to wire lead terminals.

Dimensions and configuration: See figure 1.

Weight: 13 grams (0.46 ounce) maximum.

Identification marking (full): Applicable.

Seal: Hermetic.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.

LIFE TEST REQUIREMENTS:

High level: 100,000 cycles.

Low level: 100,000 cycles plus 900,000 cycles mechanical life.

Part or Identifying Number (PIN): M39016/6- (plus dash number from table I and suffix letter designating failure rate level).

TABLE I. Dash numbers and applicable characteristics. 1/

Dash number 2/				Mount	Load rating	Coil voltage 4/ (V dc)		At +25°C				Over temperature range 3/		
Wire lead (PI) 6/	Solder lug	Wire lead (SP)	Wire lead			Rated	Max	Coil Resistance ohms ±10%	Specified pickup voltage (V dc) max 3/	Specified hold voltage (V dc) 3/	Specified dropout (V dc) max 3/	Specified pickup voltage (V dc) max	Specified hold voltage (V dc)	Specified dropout voltage (V dc)
141	104	105	106	B	Type 1	26.5	32.0	700	13.5	8.0	1.5	18.0	14.0	1.0
---	107	125	108	C										
---	128	---	---	D 5/										
142	129	109	110	None										
---	149	---	---	E										
241	204	205	206	B	Type 2									
---	207	225	208	C										
---	228	---	---	D 5/										
242	229	209	210	None										
---	249	---	---	E										
143	111	112	113	B	Type 1	12.0	15.0	160	6.4	4.0	0.7	9.0	5.8	0.50
---	114	126	115	C										
144	130	116	117	None										
---	150	---	---	E										
243	211	212	213	B	Type 2									
---	214	226	215	C										
244	230	216	217	None										
---	250	---	---	E										
145	118	119	120	B	Type 1	6.0	7.5	40	3.2	2.0	0.35	4.5	2.9	0.25
---	121	127	122	C										
146	131	123	124	None										
---	151	---	---	E										
245	218	219	220	B	Type 2									
---	221	227	222	C										
246	231	223	224	None										
---	251	---	---	E										

See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.

TABLE 1. Dash numbers and applicable characteristics - Continued. 1/

Dash number 2/						Coil voltage 4/ (V dc)		At +25°C				Over temperature range 3/		
Wire lead (PI) 6/	Solder lug	Wire lead (SP)	Wire lead	Mount	Load rating	Rated	Max	Coil resistance ohms ±10%	Specified pickup voltage (V dc) max 3/	Specified hold voltage (V dc) 3/	Specified dropout voltage (V dc) max 3/	Specified pickup voltage (V dc) max	Specified hold voltage (V dc)	Specified dropout voltage (V dc)
147	132	133	134	B	Type 1	5.0	6.0	27	2.7	1.65	0.29	3.8	2.4	0.21
---	135	136	137	C										
148	138	139	140	None										
---	152	---	---	E										
247	232	233	234	B	Type 2									
---	235	236	237	C										
248	238	239	240	None										
---	252	---	---	E										

1/ Each relay possesses high level and low-level capabilities. However, relays previously tested or used above 10 mA resistive at 6 V dc maximum, or peak ac open circuit, are not recommended for subsequent use in low level applications.
2/ The suffix letter L, M, P, or R, to designate the failure rate level, shall be added to the applicable dash number. Failure rate level (percent per 10,000 operations): L, 3.0, M, 1.0; P, 0.1; R, 0.01. Example, 204M---------- 204R.
3/ Pick-up, hold and dropout voltages as shown are for test purposes only and are not to be used as design criteria.
4/ Caution: The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.
5/ Not for new design.
6/ Solderability for plug-in relays is not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.

QUALIFICATION INSPECTION AND SAMPLE SIZE: See table II.

TABLE II. Qualification inspection and sample size.

Single submission	Group Submission		
	Type 1	Type 2	Sample Size
33 units plus 1 open unit for level M at C = 0 1/ Qualification inspection as applicable.	M39016/6-104	M39016/6-204	33 units plus 1 open unit for level M at C = 0 1/ Qualification inspection as applicable.
	M39016/6-115 M39016/6-149	M39016/6-215 M39016/6-249	2 units, qualification inspection Q1, and shock, vibration, acceleration, terminal strength, and seal.
	M39016/6-141 M39016/6-142	M39016/6-241 M39016/6-242	2 units, qualification inspection Q1, shock, and vibration.
	M39016/6-123 M39016/6-132	M39016/6-223 M39016/6-236	2 units, qualification inspection Q1.
	For extension of qualification to type 2	For extension of qualification to type 1	
	M39016/6-204	Not applicable	1 unsealed sample unit.

1/ The number of units required for qualification testing shall be increased as required in qualification inspection Q5, MIL-PRF-39016, if the relay manufacturer elects to test the number of units permitting one or more failures. Prior to performance of qualification inspection testing the relay manufacturer shall preselect the sample size.

QUALIFICATION INSPECTION (REDUCED TESTING) AND SAMPLE SIZE: See table III. If the relays produced for MIL-PRF-39016/6 are similar in construction and design to the relays produced for MIL-PRF- 39016/55 (except for the diodes and coils, as applicable), then reduced testing for qualification of MIL-PRF- 39016/6 relays may be performed concurrent with or subsequent to successful qualification of MIL-PRF- 39016/55.

TABLE III. Qualification inspection (reduced testing) and sample size.

Inspection
2 units each coil voltage - Q1 of qualification inspection table. 1 unsealed sample unit for internal examination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.

SUPERSESSION DATA: See table IV.

TABLE IV. Supersession data. 1/

Dash number (type 1) PIN M39016/6-	Dash number (type 2) PIN M39016/6-	Superseded PIN MIL-DTL-5757/10-
104	204	005, 011, 017
105	205	006, 012, 018
106	206	---
107	207	001, 007, 013
108	208	002, 008, 014
109	209	062
110	210	---
111	211	---
112	212	---
113	213	---
114	214	---
115	215	---
116	216	---
117	217	---
118	218	---
119	219	---
120	220	---
121	221	---
122	222	---
123	223	061
124	224	---
125	225	---
126	226	---
127	227	---
128	228	019, 021
129	229	---
130	230	---
131	231	---
132	232	---
133	233	---
134	234	---
135	235	---
136	236	---
137	237	---
138	238	---
139	239	---
140	240	---
141	241	---
142	242	---
143	243	---
144	244	---
145	245	---
146	246	---
147	247	---
148	248	---
149	249	---
150	250	---
151	251	---
152	252	---

1/ The listed M39016/6-100 series PIN's may be substituted for the M39016/6-200 series, M5757/10 PIN's. However, the M39016/6-200 series, M5757/10 PIN's shall not be substituted for the M39016/6-100 series PIN's.

CROSS REFERENCE FOR GOVERNMENT SUPPORT: See table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.

TABLE V. Cross reference for Government logistical support.

Superseded PIN M5757/10-	Superseded PIN M39016/6-	Support with PIN M39016/6-
005, 011, 017	204	104
006, 012, 018	205	105
---	206	106
001, 007, 013	207	107
002, 008, 014	208	108
062	209	109
---	210	110
---	211	111
---	212	112
---	213	113
---	214	114
---	215	115
---	216	116
---	217	117
---	218	118
---	219	119
---	220	120
---	221	121
---	222	122
061	223	123
---	224	124
---	225	125
---	226	126
---	227	127
019, 021	228	128
---	229	129
---	230	130
---	231	131
---	232	132
---	233	133
---	234	134
---	235	135
---	236	136
---	237	137
---	238	138
---	239	139
---	240	140
---	241	141
---	242	142
---	243	143
---	244	144
---	245	145
---	246	146
---	247	147
---	248	148
---	249	149
---	250	150
---	251	151
---	252	152

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-PRF-39016, this document references the following:

ASTM-B488
MIL-PRF-39016/55
MIL-DTL-5757/10
MIL-STD-202-204
MIL-STD-202-213
MIL-STD-202-214
MIL-STD-889
MIL-STD-1285

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - AR
Navy - AS, MC, OS, SH
Air Force - 19

(Project 5945-2026-034)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T17:32Z
Check the source to verify that this is the current version before use.