NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

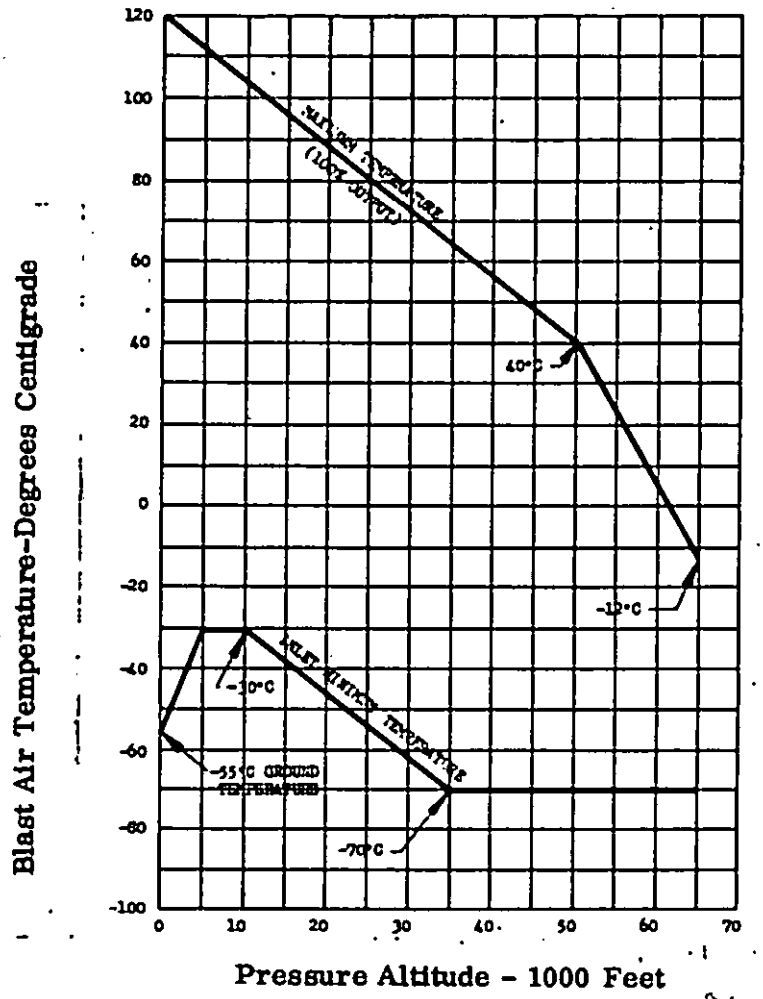

Pressure Altitude is Measured at Equipment Exit.
Air Temperature is Measured at Equipment Inlet.
Pressure Head and Test Conditions Per Detail Specification

(A) **Declassified.**

APPROVED 13 Jul 53 REVISED (A) 27 Nov 53

THIS IS A DESIGN STANDARD. NOT USED AS A PART NUMBER

CUSTODIANS Navy - Bu Aer Air Force	OTHER INT. A - B - AF -	MILITARY STANDARD	MS33542 (ASG)
		CRITERIA-TEMPERATURE AND ALTITUDE RANGE BLAST COOLED ELECTRIC EQUIPMENT	
PROCUREMENT SPECIFICATION ZONE		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1
1 OCT 52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:04Z
Check the source to verify that this is the current version before use.