INCH-POUND

MS33660D
22 November 1999
SUPERSEDING
MS33660C
13 January 1995

DETAIL SPECIFICATION SHEET

TUBING END, HOSE CONNECTION, STANDARD DIMENSIONS FOR

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

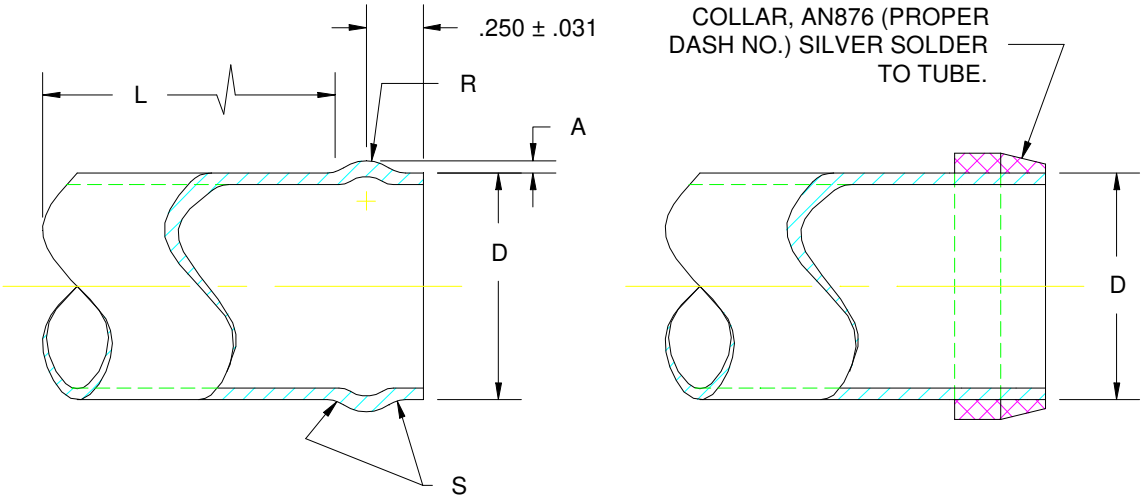

TYPE A TYPE B

FIGURE 1. Tubing end.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:06Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

SIZE NO.	D 1/ TUBE OD	D 1/ TOLERANCE FOR LENGTH L TYPE A END	A ±.003 BEAD HEIGHT	L MIN LENGTH	R MAX RAD	S MAX RAD	COLLAR CORROSION RESISTANT STEEL	COLLAR BRASS
4	.250	+.003/–.010	.031	.750	.125	.062		
5	.313		.033					
6	.375		.035					
8	.500		.038					
10	.625							
12	.750	+.004/–.010					AN876-12	AN876-12B
16	1.000	+.005/–.010	.062		.156	.093	AN876-16	AN876-16B
20	1.250						AN876-20	AN876-20B
24	1.500		.072				AN876-24	AN876-24B
28	1.750						AN876-28	AN876-28B
32	2.000		.082				AN876-32	AN876-32B
36	2.250	+.006/–.010						
40	2.500						AN876-40	AN876-40B
44	2.750							
48	3.000						AN876-48	AN876-48B
52	3.250		.088					
56	3.500	+.008/–.010						
60	3.750							
64	4.000							
68	4.250							
72	4.500							
76	4.750							
80	5.000							
84	5.250							
88	5.500	±.010						
92	5.750							
96	6.000							

1/ TUBE OD FOR TYPE A END, AFTER BEADING, SHALL BE CONTROLLED FOR DISTANCE L WITHIN SPECIFIED TOLERANCES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:06Z
Check the source to verify that this is the current version before use.

NOTES:

1. Type B tubing end shall not be used with MIL-C-25014 type flexible couplings that may still be in use.
2. Use of type A and B optional on corrosion resistant steel and brass tubing .750 and over.
3. Break all sharp edges and remove all burrs and slivers.
4. All dimensions are in inches, unless otherwise specified.
5. This is a design standard. Not to be used as a part number.
6. Tube diameters in excess of 6 inches shall be coded by suffixing the nominal tube OD in sixteenths of an inch to the basic design standard number. Dimensions for these sizes shall be the same as MS33660-96. Example of size number: MS33660-184 tube end bead for 11.50 OD tube.
7. Referenced government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.
8. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.
9. In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification sheet shall take precedence.

Custodians:
Army - CR4
Navy - AS
Air Force - 99
DLA - CC

Review activities:
Army - MI
Air Force - 82

Preparing activity:
DLA - CC

(Project 4730-1062)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:06Z
Check the source to verify that this is the current version before use.