MIL-C-46746D(AT)
6 September 1978
SUPERSEDING
MIL-C-46746C(AT)
8 November 1971

MILITARY SPECIFICATION

CARRIER, COMMAND POST, LIGHT TRACKED: M577 AND M577A1 PROCESSING FOR STORAGE AND SHIPMENT OF

This specification is approved for use by US Army Tank-Automotive Materiel Readiness Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the processing of the M577 and M577A1 Light Tracked, Carrier, Command Post for storage outside of buildings; for immediate use shipment; and for domestic or overseas shipment, including carloading; meeting the requirements of Levels A and B processing (see 6.1).

1.2 Classification. Processing shall be of the following levels, as specified (see 6.2).

Level A - Maximum military protection.

Level A is the processing required for the protection of vehicle during shipment, handling, and storage exceeding 90 days from date of actual processing. This level does not provide for driveaway capability. It does provide for domestic or overseas shipment, including open deck loading.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Tank-Automotive Materiel Readiness Command, ATTN: DRSTA-GSS, Warren, MI 48090, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

FSC PACK

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

Level B - Minimum military protection.

Level B is the limited processing required for the protection of vehicle during shipment, handling, and storage not to exceed 90 days from date of actual processing. This level provides for driveaway capability, when specified, and domestic or overseas shipment (excluding open deck loading).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
O-I-490	- Inhibitor, Corrosion, Liquid Cooling System.
O-S-576	- Sodium Bicarbonate, Technical.
P-D-220	- Detergent, General Purpose.
GG-T-250	- Tester, Antifreeze Solutions.
QQ-S-781	- Strapping, Steel, Flat and Seals.
TT-E-529	- Enamel, Alkyd, Semi-gloss.
TT-I-1795	- Ink, Marking, Stencil, Opaque (Porous and Nonporous Surfaces).
TT-V-121	- Varnish, Spar, Water-resisting.
UU-P-268	- Paper, Kraft, Wrapping.
UU-T-81	- Tags, Shipping and Stock.
VV-F-800	- Fuel Oil, Diesel.
VV-L-800	- Lubricating Oil, General Purpose, Preservative (Water-displacing, Low Temperature).
ZZ-T-416	- Tire, Pneumatic, Retread and Repair Materials.
MMM-A-178	- Adhesive, Paper Label, Water-resistant.
PPP-B-566	- Box, Folding, Paperboard.
PPP-B-636	- Box, Shipping, Fiberboard.
PPP-P-291	- Paperboard, Wrapping and Cushioning.
PPP-T-42	- Tape, Packaging/Masking, Paper.
PPP-T-97	- Tape, Pressure-sensitive Adhesive, Filament Reinforced.
PPP-T-60	- Tape, Packaging, Waterproof.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-117	- Bag, Sleeve and Tubing - Interior Packaging.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-S-207	- Sulfuric Acid, Electrolyte, Packaging, Packing, and Marking for Shipment and Storage of.
MIL-C-450	- Coating Compound, Bituminous Solvent Type, Black (for Ammunition).
MIL-G-3056	- Gasoline, Automotive, Combat.
MIL-C-5501	- Cap and Plug, Protective, Dust and Moisture Seal.
MIL-C-5501/7	- Cap and Plug, Protective, Dust and Moisture Seal (Cap Plug, General Purpose).
MIL-H-6083	- Hydraulic Fluid, Petroleum Base, for Preservation and Operation.
MIL-G-10924	- Grease, Automotive and Artillery.
MIL-B-11188	- Battery, Storage, Lead Acid.
MIL-A-11755	- Antifreeze, Arctic-type.
MIL-B-12841	- Basic Issue Items for Military Vehicles, Carriages and Equipment, Preparation for Shipment and Storage of.
MIL-P-13983	- Paint, Temporary, Lusterless, Gasoline Removable.
MIL-P-14232	- Parts, Equipment and Tools for Army Material, Packaging and Packing of.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold Application.
MIL-D-16791	- Detergent, General Purpose (Liquid, Nonionic).
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Break-in.
MIL-T-22085	- Tape, Adhesive, Preservation and Sealing.
MIL-B-22191	- Barrier Materials, Transparent, Flexible, Heat Sealable.
MIL-P-46002	- Preservative Oil, Contact and Volatile Corrosion Inhibited.
MIL-A-46153	- Antifreeze, Ethylene Glycol Inhibited, Heavy Duty, Single Package.
MIL-T-50036	- Talc, Technical, Tl.
MIL-D-81298	- Dye, Liquid Red, for the Detection of Leaks in Aircraft Fuel Systems.

STANDARDS

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T06:50Z
Check the source to verify that this is the current version before use.

PUBLICATIONS

TB ORD 392 - Tank Automotive, Gasoline Engines, Lubrication Before Use.

PACKAGING DATA SHEETS

8736419 - BII M577 Packaging of.
8736577 - BII M577A1 Packaging of.

(Copies of specifications, standards and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASSOCIATION OF AMERICAN RAILROADS PUBLICATIONS

Section No. 1 - General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6 - Rules Governing the Loading of Department of Defense Material on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago, Illinois 60605.)

DEPARTMENT OF TRANSPORTATION

Hazardous Materials Regulations

(Application for copies should be addressed to the Department of Transportation, Hazardous Materials Regulations Board, Washington, D.C. 20590.)

DEPARTMENT OF TRANSPORTATION

Federal Motor Carrier Safety Regulations

(Application for copies should be addressed to the Department of Transportation, Bureau of Motor Carrier Safety, Washington, D.C. 20590.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Level A.

3.1.1 One of the first ten production processed vehicles. Unless otherwise specified (see 6.2), one of the first ten production processed vehicles shall be subjected to the inspection specified in 4.2. Approval of one of the first ten production processed vehicles shall not relieve the contractor of his obligation to process all vehicles in accordance with this specification. Except as otherwise specified by the procuring activity, any change to materials or design after approval of one of the first ten production processed vehicles shall require an additional production processed vehicle be inspected as specified in 4.2. Government representative shall select the vehicle to be inspected.

3.1.2 Government furnished equipment. Unless previously accomplished, government furnished equipment (GFE) (other than installed) shall be packaged, packed and marked in accordance with the individual document for the specific item. GFE shall be stowed with basic issue items (BII).

3.1.3 Preservatives and atomized spray equipment. When atomized spraying of preservative oils is specified, equipment shown in figures 2 and 3, or equivalent, shall be used. Compressed air supply lines shall be equipped with moisture separators every 50 feet or fraction thereof.

3.1.4 Processing records. Records of vehicle processing shall be maintained and shall be readily available for review by Government representative.

3.1.5 Disassembly. Projecting parts whose removal will accomplish desired cube reduction and parts susceptible to damage and pilferage shall be removed from the vehicle. Removed bolts, nuts, screws, pins, and washers shall be placed in one of the mating parts and secured. Removed parts shall be preserved, packaged, and packed. Packed parts shall be identified and stowed securely within the vehicle.

3.1.5.1 Matchmarking. Parts removed from the vehicle shall be matchmarked when necessary to facilitate reassembly. Matchmarking information shall be put on cloth shipping tags conforming to Type A of UU-T-81, or on metal tags marked with soluble paint, and attached to mating parts. The marked cloth shipping tags shall be waterproofed with varnish conforming to TT-V-121 or adhesive conforming to MMM-A-178.

3.1.6 Record forms. Two copies of DD Form 1397 shall be provided. Information on forms shall include preservation accomplished and depreservation instructions. The Equipment Log Book Binder and one copy of DD Form

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

1397 (see 6.4) shall be placed in a bag conforming to Type I, Class B, Style 2, 6 mil of MIL-B-117; bag shall be closed by heat sealing and securely attached in driver's compartment of the vehicle. The other copy of DD Form 1397 shall be waterproofed with adhesive conforming to MMM-A-178, or sealed in a plastic bag and securely attached in a conspicuous location on the exterior of the vehicle.

3.1.7 Cleaning and drying (see 4.5.2.1).

3.1.7.1 Interior of vehicle. Interior surfaces of vehicle shall be cleaned with a solution of detergent conforming to P-D-220 or Type 1 of MIL-D-16791 and warm water. Water or other liquid under pressure or steam cleaning shall not be used. After cleaning, cleaned surfaces shall be rinsed with clean water and dried. Care shall be taken during cleaning and rinsing to assure that no liquids enter instruments, connections, or other components susceptible to water damage and that water does not accumulate in areas where it cannot drain or be dried.

3.1.7.1.1 Cleaning and drying of battery supports and retainers. Battery supports and retainers shall be cleaned with a solution of one-half pound of sodium bicarbonate conforming to O-S-576 per gallon of water. After cleaning, cleaned surfaces shall be flushed with clean water, then thoroughly dried. Dried surfaces shall then be preserved in accordance with 3.1.8.2.

3.1.7.1.2 Cleaning and drying of backrests and seats. Backrest and seat cushions shall be cleaned with a solution of detergent conforming to P-D-220, or Type 1 of MIL-D-16791, in warm water. After cleaning, cushions shall be wiped with cloths saturated with clean water to remove cleaning solution. Care shall be taken not to saturate the cushions with cleaning solution or water. After rinsing, cushions shall be dried, then protected in accordance with 3.1.9.3.

3.1.7.2 Exterior of vehicle. Exterior of vehicle shall be cleaned using a solution of detergent conforming to P-D-220, or Type 1 of MIL-D-16791, in warm water or steam. Cleaning shall remove all foreign matter. After cleaning, cleaned surfaces shall be rinsed with clean water or steam and thoroughly dried. Care shall be taken to avoid entry of water or steam into driver's or engine compartments.

3.1.8 Preservation.

3.1.8.1 Relubrication. If vehicle has been operated more than 50 miles since lubrication, or after vehicle has been cleaned in accordance with 3.1.7.2, the vehicle shall be relubricated using materials conforming to

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

drawings, specifications, or lubrication order applicable to the vehicle. All exposed oil can points such as, but not limited to, levers, locking levers, locking bars, locking pins, pintle pins, hinge pins, hinges, strikers, wing nuts, door locks, hand-operated locking knobs, latches, linkage, and threaded ends of yokes and related clevis pins shall be coated with lubricant conforming to VV-L-800. Excess lubricant shall be removed after coating.

3.1.8.2 Preservation of battery supports and retainers. Top battery supports and retainers shall be preserved with compound conforming to MIL-C-450.

3.1.8.3 Transmission, transfer assembly, control differential and final drives. Transmission shall contain lubricating oil conforming to Type 1, Grade 10 of MIL-L-21260 filled to operating level. Transfer assembly, control differential, and final drives shall contain lubricating oil conforming to Type 1, Grade 10 or 30, as applicable, of MIL-L-21260 filled to operating level. DD Form 1397 shall be annotated with type and grade of lubricant used (see 3.1.6).

3.1.8.4 Cooling system. Cooling system shall be protected by one of the following procedures:

a. For shipment to, and storage in, areas where the temperature drops below minus 40 degrees Fahrenheit (-40°F), systems shall be protected as specified in 3.1.8.4.3.
b. For shipment and storage within the bounds of 30 degrees north latitude and 20 degrees south latitude, except continental United States, systems shall be protected as specified in 3.1.8.4.2.
c. For all other shipments, cooling systems shall be protected as specified in 3.1.8.4.1.

NOTE: DD Form 1397 (see 3.1.6) shall be completed to indicate coolant used.

3.1.8.4.1 Water and antifreeze procedure. Cooling system shall be filled to operating level with a clean solution consisting of equal parts by volume of antifreeze (ethylene glycol) conforming to MIL-A-46153, and water. Engine shall be operated until a temperature has been reached that causes thermostat to open, to assure complete mixing and even distribution of the antifreeze solution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH WATER AND ANTIFREEZE SOLUTION (ETHYLENE GLYCOL) IN EQUAL PARTS BY VOLUME - DO NOT DRAIN", shall be securely attached to radiator filler neck.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

3.1.8.4.2 Water and corrosion inhibitor procedure. Cooling system shall be filled with clear water up to, but not including the radiator upper tank. A corrosion inhibitor conforming to O-I-490 shall be added in the proportion of five ounces of the inhibitor for each ten quarts of water. The inhibitor shall be dissolved in two quarts of warm water and poured into the radiator while the engine is idling. More water shall be added, if necessary, to fill the radiator to operating level. A warning tag, bearing the information "COOLING SYSTEM DOES NOT CONTAIN ANTIFREEZE - FILLED WITH WATER AND INHIBITOR", shall be securely attached to radiator filler neck.

3.1.8.4.3 Antifreeze compound procedure. Cooling system shall be filled to operating level with antifreeze compound conforming to MIL-A-11755. The compound shall be used without dilution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH ANTIFREEZE (ARCTIC-TYPE) - DO NOT DRAIN", shall be securely attached to radiator filler neck.

3.1.8.5 Engine crankcase preservation. Crankcase of compression or spark ignition engine shall be filled to operating level with lubricating oil conforming to Type 1 of MIL-L-21260 of the seasonal grade specified in the applicable drawing, specification, or lubrication order. DD Form 1397 shall be annotated with type and grade of lubricant used.

3.1.8.6 Spark ignition engine. Spark ignition engine preservation shall be in accordance with 3.1.8.6.2 through 3.1.8.6.3 in an uninterrupted sequence, except for the cooling period specified in 3.1.8.6.3.

3.1.8.6.1 Spark plugs. Spark plugs shall be removed, individually packaged in accordance with Method IA-8 of MIL-P-116, and packed together in a box conforming to Style II, Type D, Class A of PPP-B-566. Box shall be closed with tape conforming to Type III, Class 1 of PPP-T-60, identified as to contents, and securely stowed in a conspicuous location within the engine compartment. Slave spark plugs shall be installed. Engine shall be preserved in accordance with 3.1.8.6.2 and 3.1.8.6.3.

3.1.8.6.2 Preservation through fuel system and carburetor. One compartment of a two compartment container shall be filled with lubricating oil conforming to Type I, Grade 10 of MIL-L-21260, and the other with gasoline conforming to MIL-G-3056. The container shown in figure 1 has proven satisfactory for engine preservation. The container shall be positioned to provide gravity feed. The fuel line shall be disconnected from the fuel tank side of the fuel filter sediment bowl and the line from the auxiliary container shall be connected to the filter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

Container selector valve shall be turned to fuel position. Engine shall be started and operated at 1200 revolutions per minute (rpm), without load, until running smoothly, but for not more than four minutes, then accelerated to 2500 rpm for two minutes. Then the container selector valve shall be turned to "oil" position. The instant engine begins to misfire, ignition switch shall be turned off. The line from the auxiliary container shall be disconnected, and the vehicle fuel line shall be reconnected. Fuel filter shall then be drained.

3.1.8.6.3 Preservation through spark plug openings. After preservation in accordance with 3.1.8.6.2, engine shall be cooled until cylinder head temperature does not exceed 100°F measured at spark plug gasket surface of all cylinders. Cooling shall be accomplished by forced air currents, by circulation of engine coolant, or by waiting the period of time necessary for the cylinder heads to cool to 100°F. When ambient temperature exceeds 100°F, the engine shall be cooled to ambient temperature. Slave spark plugs shall be removed. While the engine is being turned over with the starter, a quantity of lubricating oil conforming to Type I, Grade 10 of MIL-L-21260 shall be atomized through each spark plug opening to assure complete coverage of all surfaces within the combustion chamber. The amount of oil to be used per cylinder per application shall not exceed one ounce unless a greater quantity is necessary to obtain the required coverage. After completion of the first application, a second application shall be made to each cylinder without cranking the engine. The equipment shown in figures 2 and 3 has proven satisfactory for engine preservation.

NOTE: If the 3-7/8 inch nozzle extension shown in figure 2 is too short to enter spark plug openings, a longer extension may be used.

Female threads of spark plug ports shall be coated with lubricating oil conforming to Type I, Grade 10 of MIL-L-21260, and each port shall be sealed immediately with a plastic plug conforming to MIL-C-5501. A red warning tag, bearing the information "ENGINE PRESERVED FOR STORAGE: DO NOT CRANK - FOR DEPRESERVATION WITH OR WITHOUT PRE-OILING, INSTALL SLAVE PLUGS AND OPERATE ENGINE TO BURN OFF EXCESS OIL. AFTER BURN OFF, REMOVE SLAVE PLUGS AND INSTALL PLUGS STOWED IN ENGINE COMPARTMENT", shall be attached securely in a conspicuous location within driver's compartment. DD Form 1397 shall be annotated with the type and grade of lubricating oil used.

3.1.8.6.4 Gasoline auxiliary engine. Gasoline auxiliary engines shall be processed in accordance with the provisions of 3.1.8.6.2 and 3.1.8.6.3, except 3 ounces of preservative oil conforming to Type 1, Grade 10, of MIL-L-21260 shall be atomize sprayed into the crankcase, instead of the amount specified in 3.1.8.6.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

3.1.8.7 Compression ignition engine. Compression ignition engine preservation shall be in accordance with 3.1.8.7.1 through 3.1.8.7.3 in an uninterrupted sequence.

3.1.8.7.1 Fuel system and combustion chamber. Prior to processing, engine shall be cooled to assure that cylinder head temperature, measured at injector nozzle flange surface of all cylinders, is not more than 100°F. Cooling shall be accomplished by induced air currents, circulation of engine coolant, or by waiting the period of time required to arrive at the above specified temperature. When ambient temperature exceeds 100°F, engine shall be cooled to ambient temperature.

3.1.8.7.1.1 Fuel system preservation. After the engine has been cooled, the fuel supply system from the fuel tank shall be shut off. A portable container with two compartments shall be positioned to provide gravity feed to the engine. One compartment shall be filled with preservative oil conforming to Grade 1 of MIL-P-46002 to which has been added an oil soluble red dye conforming to MIL-D-81298, in a concentration sufficient to impart a marked coloring to the oil. The second compartment shall be filled with diesel fuel conforming to VV-F-800. (The container shown in figure 1 has proven satisfactory for engine preservation.)

3.1.8.7.1.2 Fuel injector lines. Disconnect the fuel line between the primary fuel filter and fuel pump at the primary fuel filter outlet. Drain the diesel fuel from the secondary fuel filter. Remove filter can and remove filter element. Fill filter can with preservative oil, Grade 1, MIL-P-46002 and replace. Connect fuel line from auxiliary fuel container to fuel pump supply line. Disconnect vehicle fuel return line at quick disconnect coupling. Connect a transparent plastic fuel line to the engine end of the disconnected fuel return line, insert the other end of plastic fuel line into a recovery container to collect the returned oil.

3.1.8.7.1.3 Restricted air intake. Disconnect air cleaner hose from the air inlet elbow. An air restrictor boot shall be installed on air inlet elbow and secured to assure that air to the engine is completely cut off. (The air restrictor boot shown in figure 5 has proven satisfactory for engine preservation.) The regulator valve on the auxiliary fuel container shall be turned to the preservative oil position (Grade 1, MIL-P-46002). Place engine fuel control in RUN position. Crank engine with starter (NOTE: Engine may fire for approximately five seconds.) for a minimum period of 30 seconds and not exceeding a maximum of 45 seconds. The regulator valve on the auxiliary fuel container shall be turned to the off position. Remove the filter can from the secondary fuel filter. Drain the preservative oil, Grade 1, MIL-P-46002, from can. Wipe clean with lint free cloth. Replace element, fill can with diesel fuel oil VV-F-800, and replace filter can (see 4.5.2.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

CAUTION: Special precautions shall be taken to assure that time limits specified shall not be exceeded, or the engine starter or starter solenoid may be damaged. Also, excessive cranking could cause hydrostatic lock.

3.1.8.7.2 Engine purging. Purge fuel return lines of all preservative oil, Grade 1, MIL-P-46002, by turning the auxiliary fuel tank valve to the diesel fuel position and closing engine fuel control shut off. Crank engine with starter for a period of time to remove all traces of red colored lubricating oil from the plastic return line.

CAUTION: Do not operate starter for a period exceeding 45 seconds.

If preservative oil has not been purged, rest starter for three minutes and repeat purge procedure. Turn the auxiliary fuel container valve to the off position. Remove fuel line and reconnect to the outlet side of primary fuel filter. Turn on vehicle fuel supply system. Remove air restrictor boot. Disconnect plastic fuel return line, and reconnect vehicle fuel return line at the quick disconnect coupling (see 4.5.2.4).

3.1.8.7.3 Preservation through air intake and exhaust system. After preservation in accordance with 3.1.8.7.1 and 3.1.8.7.2, one ounce of preservative oil conforming to Grade 1 of MIL-P-46002 shall be atomized into exhaust opening. Opening shall then be sealed with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085. The hose shall be disconnected at the air intake, and one ounce of preservative oil, conforming to Grade 1, MIL-P-46002, shall be atomized into the air intake opening. The air intake opening and the engine crankcase breathers shall be sealed with plastic plugs conforming to MIL-C-5501 or with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085. A red warning tag, bearing the information "ENGINE PRESERVED WITH VCI - DO NOT CRANK" and "BEFORE CRANKING, REMOVE CAPS, TAPE, OR PLUGS, AND REINSTALL HOSE", shall be placed in a conspicuous location within driver's compartment. DD Form 1397 shall be annotated to show engine is preserved with VCI and oil (see 4.5.2.4).

3.1.8.7.4 Preservation through oil level gage rod opening. After preservation in accordance with 3.1.8.7.1 and 3.1.8.7.2, the oil level gage rod shall be removed, and six ounces of preservative oil conforming to Grade 1 of MIL-P-46002 shall be atomized into the crankcase through the oil level gage rod opening. An extension of sufficient length to permit the spray nozzle to be within the crankcase shall be used. Spray nozzle shall not be submerged in the crankcase oil. After spraying has been accomplished, oil level gage rod shall be reinstalled. All openings to the engine interior, including oil level gage rod opening and oil filler cap, shall be sealed with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085 (see 4.5.2.4).

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

3.1.8.7.5 Preservation through flywheel housing. Two ounces of preservative oil conforming to Grade 1 of MIL-P-46002 shall be atomized into the flywheel housing (see 4.5.2.4).

3.1.8.7.6 Air cleaner. Air cleaner openings shall be sealed with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085.

3.1.8.8 Personnel and engine compartment heaters and lines. Personnel and engine heaters shall have the fuel supply shut off valve located at the inlet side of fuel filters turned to the OFF position. The main fuel line supplying fuel to the heaters shall be disconnected at a point closest to shut off valves. Fuel from the fuel lines shall be allowed to drain. Seal ends of disconnected fuel lines and shut off valves with plastic plugs/caps conforming to MIL-C-5501, with tape conforming to Type IV, Class 1 of PPP-T-60, or with Type II of MIL-T-22085. External exhaust stack shall have opening sealed with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085 or plastic plug/cap conforming to MIL-C-5501. Four warning tags, each bearing the information "HEATER FUEL LINES DISCONNECTED AND SEALED. PRIOR TO PLACING PERSONNEL OR ENGINE HEATERS IN OPERATION, REMOVE PLUGS/CAPS OR TAPE FROM FUEL LINES, EXHAUST STACK AND SHUT OFF VALVES. OPERATED HEATER FUEL PUMP AND DRAIN A MINIMUM OF ONE QUART OF FUEL THROUGH THE FUEL LINES INTO A PORTABLE CONTAINER. RECONNECT HEATER FUEL LINES.", shall be prepared. One tag each shall be secured to the personnel and engine heater operating switches and one each to the personnel and engine heaters.

3.1.8.9 Fuel tank preservation. Fuel tank shall be drained to the maximum extent possible. Fuel tank cap and filler screen shall be removed and coated with lubricating oil conforming to Type 1, Grade 30 of MIL-L-21260. One quart of lubricating oil conforming to Type 1, Grade 10 of MIL-L-21260 shall be added to each five gallons or portion thereof of fuel. The contractor shall maintain a written procedure used to ascertain the amount of fuel. Tank cap and filler screen shall be reinstalled (see 4.5.2.2).

3.1.8.9.1 Fuel tank security. After processing the fuel tank as specified in 3.1.8.9, the armored fuel cap shall be secured with the combat lock.

3.1.8.9.1.1 Auxiliary engine fuel tank. Fuel tank shall be drained to the maximum extent possible. Fuel tank cap and filler screen shall be removed and coated with lubricating oil conforming to Type I, Grade 30 of MIL-L-21260. Fuel tank shall be coated internally by fogging with lubricating oil conforming to Type I, Grade 10 of MIL-L-21260 of sufficient quantity as to assure complete coverage. Tank cap and filler screen shall be reinstalled, and after completion of engine processing,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

filler cap breather vent shall be sealed with tape conforming to Type IV, of PPP-T-60 or Type II of MIL-T-22085.

3.1.8.9.1.2 Auxiliary fuel tank security. After processing the auxiliary engine fuel tank as specified in 3.1.8.9.1, the fuel tank cap shall be secured with tape conforming to Type IV, Class 1 of PPP-T-60 or Type II of MIL-T-22085.

3.1.8.10 Ramp winch assembly. All unpainted metal surfaces of the ramp winch assembly, excluding cylinder rod, shall be coated with preservative conforming to Grade 4 of MIL-C-16173.

3.1.8.10.1 Ramp hydraulic reservior. Ramp hydraulic reservoir shall be filled with hydraulic fluid conforming to MIL-H-6083.

3.1.8.11 Antenna guards. Antenna guards and related hardware shall be removed for shipment and packaged in a Type CF, Class Weather-Resistant, box conforming to PPP-B-636. The box shall be closed with tape conforming to PPP-T-60, Type III, Class 1, identified as to contents, and securely stowed within the personnel compartment.

3.1.8.12 Hatches and doors. Rubber seals around hatches and doors shall be coated with powdered talc conforming to Type IV, Class C of ZZ-T-416 or talc, technical, MIL-T-50036. For shipment, hatches and doors shall be closed and locked from the inside. Driver's hatch shall be locked with a bolt and nut, with nut welded to bolt. For storage, hatches and doors shall be locked from the inside, except that the ramp door shall be secured in open position for ventilation.

3.1.8.13 Ventilation.

3.1.8.13.1 Engine compartment access plate. Engine compartment access plate and gasket, attaching hardware, and drain plugs shall be removed for ventilation. Bare metal surfaces of drain plugs shall be preserved with compound conforming to Grade 4 of MIL-C-16173. Plate, gasket, preserved drain plugs, and four access plate mounting screws and washers shall be packaged as specified in 3.1.9.7. A screen conforming to figure 4 shall be installed in access plate opening and secured with four of the existing mounting screws and washers. The information "REMOVE SCREEN, INSTALL ACCESS PLATE AND GASKET, AND DRAIN PLUGS BEFORE VEHICLE OPERATION", shall be stenciled on the exterior of the vehicle using white or yellow paint conforming to MIL-P-13983. Stenciling shall be in characters not less than 3/4 inch high.

3.1.8.13.2 Engine access compartment panels. The engine compartment panels in crew compartment shall be removed, and stowed securely in crew compartment. A warning tag bearing the information "ENGINE COMPARTMENT PANELS REMOVED: LOWER RAMP OR OPEN HATCHES WHEN OPERATING ENGINE" shall be attached in a conspicuous location within the driver's compartment.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T06:50Z
Check the source to verify that this is the current version before use.

3.1.8.13 Miscellaneous preservation. Except as otherwise specified herein, all exposed, unpainted metal surfaces on the exterior of the vehicle, except the track shoes, shall be coated with compound conforming to Grade 1 of MIL-C-16173. All exposed, unpainted, unplated metal surfaces on the interior of the vehicle shall be coated with compound conforming to Grade 4 of MIL-C-16173.

3.1.9 Packaging.

3.1.9.1 Dry charged batteries and cables. Dry charged batteries shall be installed and secured in the vehicle battery carrier. Battery cables shall be secured to battery carrier with 3/4-inch tape conforming to Type IV of PPP-T-97. Battery filler cap openings shall be sealed by placing a 2-inch wide by 3-mil thick piece of film conforming to Type II of MIL-B-22191 over each filler cap opening with cap removed. The sheet shall be of sufficient length to allow it to be depressed into the opening to the same depth as the filler plug. Filler caps shall be screwed or inserted into openings to form a complete seal without damaging the sheet. If batteries have been processed in accordance with MIL-B-11188, they need not be reprocessed as above.

3.1.9.2 Electrolyte. Electrolyte shall be packaged, packed, and marked as specified for Type IV, Class 1, in accordance with MIL-S-207. The packed electrolyte shall be stowed with the BII and secured independently to permit separate removal.

3.1.9.3 Packaging of backrests and seats. Cushions of backrests and seats (see 3.1.7.1.2) shall be covered with paper conforming to Grade B of UU-P-268 with a minimum basis weight of 60 pounds. Paper shall be secured with tape conforming to Type I of PPP-T-42.

3.1.9.4 Periscopes. If installed, periscopes shall be removed from vehicle, cleaned, dried, and immediately packaged and packed in accordance with Level A requirements of MIL-P-116 and MIL-P-14232, then securely stowed within personnel compartment.

3.1.9.5 Fire extinguishers. Fire extinguishers shall contain a minimum of 90 percent of rated full charge. All seals shall be intact. DA Form 253 shall be completed and attached securely to each extinguisher (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

3.1.9.8 Basic issue items. Unless otherwise specified (see 6.2), BII shall be processed, packaged and packed in accordance with MIL-B-12841. BII shall be stowed and secured in accordance with 3.1.9.6.1.

3.1.6.1 Stowage and securement of BII. BII and items removed for shipment shall be identified to pertinent vehicle by serial number. BII shall be stored inside buildings, except during shipment. Packed BII and removed items shall be placed within the personnel compartment of vehicle. Large wooden boxes shall be placed on the vehicle floor and shall be secured with 1-1/4 inch wide strapping conforming to Type I, Class B of QQ-S-781. Strapping shall be secured to holding devices within the compartment. Smaller wooden boxes shall be secured to the larger boxes with 3/4 inch wide strapping conforming to Type I, Class B of QQ-S-781. All boxes shall be secured in such a manner as to prevent any movement during transit and to prevent damage to containers or vehicle interiors. Corner protectors shall be used under all strapping.

3.1.9.7 Access plate, gasket, and drain plugs. Access plate, gasket and preserved drain plugs (see 3.1.8.13.1) shall be packaged in a box conforming to Type CF, Class Weather-Resistant of PPP-B-636. Box shall be closed with tape conforming to Type III, Class 1 of PPP-T-60, identified as to contents, and securely stowed within personnel compartment.

3.1.9.8 Packaging of tow hooks. Tow hooks and related hardware shall be removed for shipment and packaged in a Type CF, Class Weather-Resistant box conforming to PPP-B-636. Box shall be closed with tape conforming to Type III, Class 1, of PPP-T-60, identified as to contents, and securely stowed within personnel compartment.

3.1.10 Vehicle closure.

3.1.10.1 Closure kit. Unless otherwise specified (see 6.2), each vehicle shall be provided with a vehicle protective closure kit. Closure kit shall be fabricated, assembled, and installed in accordance with Appendix A and figures 6 through 44.

3.1.10.1.1 Closure marking. The information "TO LIFT VEHICLE FOR LOADING, UNFASTEN AND ROLL COVER FROM FRONT AND REAR BOWS EXPOSING LIFTING EYES - AFTER LOADING, SECURE COVER IN THE ORIGINAL POSITION" shall be stenciled on the front and rear of the closure in characters a minimum of 3/4 inch high using white enamel conforming to TT-E-529.

3.1.10.1.2 Closure disposition marking. The following information shall be stenciled on the outside, front and rear of the cover: "REUSABLE CLOSURE (COVER AND FRAMEWORK) - DO NOT DESTROY - WHEN REMOVED AND NO

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

LONGER REQUIRED FOR PROTECTION, PACKAGE AND SHIP PER INSTRUCTIONS ON INSIDE OF COVER." The following information shall be stenciled on the inside, front and rear of the cover:

PACKAGING AND SHIPPING INSTRUCTIONS

1. DEPOT BII CONTAINER MAY BE USED AS A SHIPPING BOX.
2. SECURELY BUNDLE LIKE ITEMS.
3. PACKAGE HARDWARE IN CLOTH BAGS.
4. GROUP LARGEST, HEAVIEST ITEMS IN BOTTOM OF BOX.
5. PLACE OTHER ITEMS IN VOID BETWEEN ABOVE ITEMS.
6. FOLD COVER - PLACE ON TOP OF ABOVE ITEMS.
7. IMMOBILIZE ALL ITEMS AND SECURE COVER.
8. SHIP TO (address to be furnished by contracting officer).

All stenciled characters are to be a minimum of 3/4 inch high using white enamel conforming to TT-E-529.

3.1.10.1.3 Depot BII box marking. The information "DO NOT DESTROY - USE FOR RETURN SHIPMENT OF VEHICLE CLOSURE KIT" shall be stenciled on the depot BII box in lettering a minimum of 3/4 inch high with a contrasting color of enamel conforming to TT-E-529.

3.1.10.2 Covered extension. Covered extension shall be packaged and packed according to figure 45, sheets 1 thru 9.

3.2 Level B. Vehicles shall be processed in the same manner as specified for Level A, with the following exceptions:

3.2.1 Transmission, transfer assembly, control differential, and final drives. Transmission, transfer assembly, control differential, and final drives shall contain operational lubricant as specified on applicable drawings, specifications, or lubrication order, filled to operating level. If, however, these units contain lubricating oil conforming to Type I, Grade 10 or 30 of MIL-L-21260, an additional amount of the same oil shall be added to attain operating level. Operating lubricants shall not be mixed with MIL-L-21260 except in an emergency. DD Form 1397 shall be annotated to indicate grade of operational lubricant or preservative oil used.

3.2.2 Engine crankcase. Engine crankcase shall contain normal operational lubricant as specified in lubrication order, filled to operational level. DD Form 1397 shall be annotated to indicate grade of lubricant used (see 3.1.8.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

3.2.3 Engine preservation. The engine shall require no preservation for Level B shipment and storage.

3.2.4 Personnel heater and fuel pump. Personnel heater and fuel pump shall be in ready-to-use condition. Heater exhaust opening shall be closed with a plastic plug conforming to MIL-C-5501/7 (see figure 47). A warning tag, bearing the information "HEATER EXHAUST OPENINGS CLOSED, REMOVE PLUG BEFORE OPERATING" shall be attached to the heater controls.

3.2.5 Residual fuel. Unless otherwise specified (see 6.2), vehicle shall be shipped without draining residual fuel from the fuel tank.

3.2.6 Backrests and seats. Cushions of backrests and seats shall not be covered. If cushions are received packaged, they shall be stowed as received in the crew compartment.

3.2.7 Vehicle closure. Vehicle closure kits shall not be provided for Level "B" shipment and storage.

3.2.8 Tow hooks. Two hooks shall be removed for overseas shipment only (see 3.1.9.8).

3.2.9 Hatches and doors. For Level "B" the driver's hatch shall be locked with a bolt and nut with the bolt threads deformed.

3.2.10 Engine compartment access panels. Engine compartment access panels in crew compartment shall not be removed.

3.2.11 Vision block openings. Plugs conforming to PPP-C-1752, Type I, Class 2, 2 inches thick, 8 1/4 + 1/8 - 0 inches long and 2 1/4 + 1/8 - 0 inches wide shall be installed in the vision block openings (see figure 46).

3.2.12 Bilge pump outlets. Bilge pump outlets shall be closed with plastic plugs conforming to MIL-C-5501/7 (see figure 46). A warning tag bearing the information "BILGE PUMP OUTLETS CLOSED PRIOR TO OPERATING BILGE PUMP, REMOVE PLUGS FROM OUTLETS" shall be secured to the bilge pump operating switch.

3.2.13 Auxiliary power unit compartment. If the auxiliary power unit compartment is not provided with PN 10932720 cover for shipment, the compartment shall be closed by means of a shroud conforming to Type I of L-P-378, 9 to 10 mils thick. The top of the shroud shall be supported by 2 pieces of hardboard conforming to figure 46, detail 2, taped to each other and to the auxiliary power unit compartment top with tape conforming to Type I of MIL-T-22085 or Class 1 of PPP-T-60. The shroud shall be secured in place with the same tape (see figure 46).

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

3.3 Materials. Materials shall be as specified herein and in referenced specifications and drawings. Material shall be free from all defects and imperfections that might affect the serviceability and appearance of the finished product (see 4.5.1 and 6.5).

3.4 Loading.

3.4.1 Loading flat cars. Loading of vehicles on open top railroad cars shall be in accordance with applicable requirements of Section 1, General Rules Governing the Loading of Commodities on Open Top Cars, and Figure 87 or 87A, Section 6, Rules Governing the Loading of Department of Defense Material on Open Top Cars, publication of the Association of American Railroads.

3.4.2 Highway shipment. Loading of vehicles for shipment by haulaway and rules for shipment by driveaway or towaway shall be in accordance with Department of Transportation publication "Federal Motor Carrier Safety Regulations", and applicable military publications.

3.4.3 Reprocessing engine after loading.

3.4.3.1 Level A. If engine is operated in connection with the moving of vehicle to loading area or during the loading itself, the engine shall be reprocessed as specified in 3.1.8.6 through 3.1.8.6.3 and 3.1.8.7 through 3.1.8.7.6, as applicable. Vehicle cover shall be rolled clear of engine intake and exhaust to provide air circulation and to prevent damage to cover. After reprocessing of engine, vehicle cover shall be replaced in its original position.

3.4.3.2 Level B. If engine is operated in connection with movement of vehicle for loading or unloading, there shall be no additional processing of engine.

3.5 Marking. In addition to any special marking required in the contract (see 6.2), vehicle shall be marked in accordance with MIL-STD-129.

3.5.1 Lifting points. The legend "LIFT HERE" with arrow pointing to the lifting eye shall be stenciled adjacent to each lifting eye using black ink conforming to TT-I-1795.

3.5.3 Preserved gasoline engine - Level A. Two red warning tags, bearing the legend "DO NOT OPERATE ENGINE UNTIL PROVISONS OF TB ORD 392 HAVE BEEN COMPLIED WITH", shall be provided for each preserved gasoline engine. One tag each shall be attached securely to the preserved gasoline engine and the other shall be attached in a conspicuous location within the driver's compartment.

3.5.3 Preserved gasoline engine - Level B. The provisions of 3.5.2 do not apply.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

3.6 Drive-on - drive-off capability. When vehicle is to be operated for loading or unloading, the following provisions shall apply.

3.6.1 Additional fuel. When specified (see 6.2), additional fuel shall be added, as required, to accomplish movement of vehicle.

3.6.2 Batteries and electrolyte. New batteries with electrolyte added and fully charged will be installed in the vehicle and battery cable properly connected.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection records. Contractor shall maintain records of all inspections performed and such records shall be readily available for review by the Government representative.

4.2 One of the first ten production processed vehicles. One of the first ten production processed vehicles (see 3.1.1) shall be subjected to the inspection and tests specified in 4.5.

4.3 Production processed vehicles. Unless otherwise specified (see 6.2), all production processed vehicles shall be subjected to the inspection and tests specified in 4.5.2 through 4.5.2.3.

4.4 Rejection. Failure of one of the first ten, or any production processed vehicle to conform to the applicable requirements of this specification shall be cause for rejection of the vehicles by the Government. No vehicles shall be accepted until objective evidence that the contractor has corrected the condition causing the rejection has been provided to the Government.

4.5 Quality conformance inspection.

4.5.1 Materials. Except for materials that have been inspected by the Government at source, all materials to be used in processing of vehicles shall be inspected in accordance with the material specification; or certified inspection and laboratory test reports shall be provided which show that furnished materials conform to the applicable material specification

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

(see 6.5). When materials are listed on a Qualified Products List, they shall be obtained from one of the approved sources indicated.

4.5.2 Processing. Except as otherwise specified herein, vehicle processing shall be inspected to determine conformance to this specification. Inspection of processing shall include all items specified in table I and 4.5.2.1 through 4.5.2.4.

4.5.2.1 Cleaning. To determine conformance to 3.1.7.1, interior of vehicles shall be examined for cleanliness. One vehicle each day shall be tested for cleanliness in accordance with the applicable provisions of MIL-P-116. To determine conformance to 3.1.7.2, exterior of vehicle shall be examined for cleanliness. Surfaces on which tape is to be applied shall be examined for cleanliness before application.

4.5.2.2 Fuel tank. To determine conformance to 3.1.8.9, visual inspection of preservative application shall be accomplished to assure addition of the correct amount of oil, based upon a known amount of residual fuel.

4.5.2.3 Cooling system. To determine conformance to 3.1.8.4, one processed vehicle shall be selected at random from each day's production. The engine coolant shall be tested using a hydrometer-thermometer type tester, with a range of minus 60°F to plus 160°F, conforming to GG-T-250.

4.5.2.4 Engine. To determine conformance to 3.1.8.6.1 through 3.1.8.6.3 or 3.1.8.7.1 through 3.1.8.7.6, as applicable, interior of the engine from one of the first ten production processed vehicles shall be examined for surface coverage. Engine shall be disassembled to the extent necessary to permit visual examination of all surfaces within the combustion chamber. The combustion chamber is all surfaces within the cylinder from and including the surface of the head within the cylinder. All surfaces within the combustion chamber shall have a "wet" coating of preservative oil such as is obtained when the item is dipped or flushed with the oil. The processing method of the approved preserved engine shall be submitted in writing for use in processing engines in all subsequent production vehicles.

5. PACKAGING

This section is not applicable to this specification.

6. NOTES

6.1 Intended use. Vehicle processing covered by this specification is intended to protect the vehicles for storage outside of buildings, for immediate use shipment, and for domestic or overseas shipment, including carloading.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number, and date of this specification.
b. Applicable level of processing (see 1.2).
c. If inspection of one of the first ten production processed vehicles is not required (see 3.1.1).
d. Applicable procedure for protection of cooling system (see 3.1.8.4).
e. If BII should be processed, packed or stored other than as specified (see 3.1.9.6).
f. If vehicle closure kit is not required (see 3.1.10.1).
g. If inspection and tests other than these specified are required (see 4.3).
h. If additional fuel shall be supplied (see 3.6.1).
i. If special marking is required (see 3.5).

6.3 Safety precautions. Caution should be exercised in handling carbon dioxide (CO_2) fire extinguisher cylinders. Cylinders should not be dropped, be permitted to strike each other, or be handled roughly. Extreme care should be exercised during the reinstallation operation to avoid tripping fire extinguisher control trigger (see 3.1.9.5).

6.4 Forms. A copy of the "Equipment Log Book" and all required forms (see 3.1.6) will be furnished to the contractor by the Government at least 30 days before shipment of the vehicles required by the contract delivery schedule.

6.5 Recycled materials. The use of recycled materials which meet the requirements of the applicable material specifications without jeopardizing the intended use of the item shall be encouraged (see 4.5.1).

6.6 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army - AT

Preparing activity:
Army - AT

Project No. 2320-AA35

☆U.S. GOVERNMENT PRINTING OFFICE: 1978—603-022/169

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection.
(See indicated paragraphs for Level A, B and C requirements)

Component	Cleaning	Preservation		Packaging/Stowage	
	Levels A & B	Level A	Level B	Level A	Level B
Processing records				3.1.4	3.1.4
Disassembly				3.1.5	3.1.5
Matchmarking				3.1.5.1	3.1.5.1
Interior of vehicle	3.1.7.1				
Battery supports & retainers	3.1.7.1.1	3.1.8.2	3.1.8.2		
Backrests & seats	3.1.7.1.2			3.1.9.3	3.2.6
Exterior of vehicle	3.1.7.2				
Relubrication		3.1.8.1	3.1.8.1		
Transmission, transfer assembly, control differential, and final drives 1/		3.1.8.3 3.1.8.5	3.2.1 3.2.2		
Engine crankcase 1/		3.1.8.6	3.2.3		
Spark ignition engine				3.1.8.6.1	
Spark plugs					
Preservation thru fuel system and carburetor		3.1.8.6.2	3.2.3		
Preservation thru spark plug openings 1/		3.1.8.6.3	3.2.3		
Gasoline auxiliary engine		3.1.8.6.4	3.1.8.6.4		
Compression ignition engine		3.1.8.7	3.2.3		
Preservation thru fuel system and combustion chamber		3.1.8.7.1	3.2.3		
Engine purging		3.1.8.7.2	3.2.3		
Preservation thru air intake and exhaust system 1/		3.1.8.7.3	3.2.3	3.1.8.7.3	
Preservation thru oil level gage rod opening		3.1.8.7.4	3.2.3	3.1.8.7.4	
Auxiliary engine unit compartment			3.2.13		

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection. - Continued
(See indicated paragraphs for Level A, B and C requiremnts)

Component	Cleaning	Preservation		Packaging/Stowage	
	Levels A & B	Level A	Level B	Level A	Level B
Preservation thru flywheel housing		3.1.8.7.5 3.1.8.7.6	3.1.8.7.6		
Air cleaner		3.1.8.8	3.2.4		
Personnel & engine compartment heaters & lines		3.1.8.9	3.2.5		
Fuel tank		3.1.8.9.1.1	3.1.8.9.1.1		
Auxiliary engine fuel tank		3.1.8.4	3.1.8.4		
Cooling system 1/		3.1.8.4.1	3.1.8.4.1		
Water & antifreeze procedure		3.1.8.4.3	3.1.8.4.3		
Arctic antifreeze procedure					
Water & corrosion inhibitor procedure		3.1.8.4.2	3.1.8.4.2		
Ramp winch assembly		3.1.8.10	3.1.8.10		
Ramp hydraulic reservior		3.1.8.10.1	3.1.8.10.1		
Antenna guards				3.1.8.11	3.1.8.11
Hatches & doors		3.1.8.12	3.1.8.12		
Ventilation & screen		3.1.8.13.1	3.1.8.13.1	3.1.9.9	3.1.9.9
Engine compartment access panels				3.1.8.13.2	3.1.8.13.2
Miscellaneous preservation		3.1.8.13	3.1.8.13.3	3.1.8.13.3	3.1.3.13.3
Dry charged batteries & cables		3.1.9.1	3.1.9.1	3.1.9.1	3.1.9.1
Electrolyte				3.1.9.2	3.1.9.2
Periscopes				3.1.9.4	3.1.9.4
Fire extinguishers				3.1.9.5	3.1.9.5
Record forms				3.1.6	3.1.6
Tow hooks				3.1.9.8	3.2.8
Basic issue items				3.1.9.6	3.1.9.6
Strapping				3.1.9.6.1	3.1.9.6.1

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T06:50Z
Check the source to verify that this is the current version before use.

TABLE I. Processing inspection. - Continued
(See indicated paragraphs for Level A, B and C requirements)

Component	Cleaning	Preservation		Packaging/Stowage	
	Levels A & B	Level A	Level B	Level A	Level B
Vehicle closure kit				3.1.10.1	3.2.7
Fuel tank security 1/				3.1.8.9.1	
Loading on flat cars				3.4.1	3.4.1
Highway shipment				3.4.2	3.4.2
Reprocessing engine after loading				3.4.3.1	3.4.3.2
Marking				3.5	3.5
Lifting points				3.5.1	3.5.1
Closure marking				3.1.10.1.1	
Closure disposition marking 1/				3.1.10.1.2	
Depot BII box marking				3.1.10.1.3	
Preserved gasoline engine				3.5.2	3.5.3

1/ Inspect DD Form 1397

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.


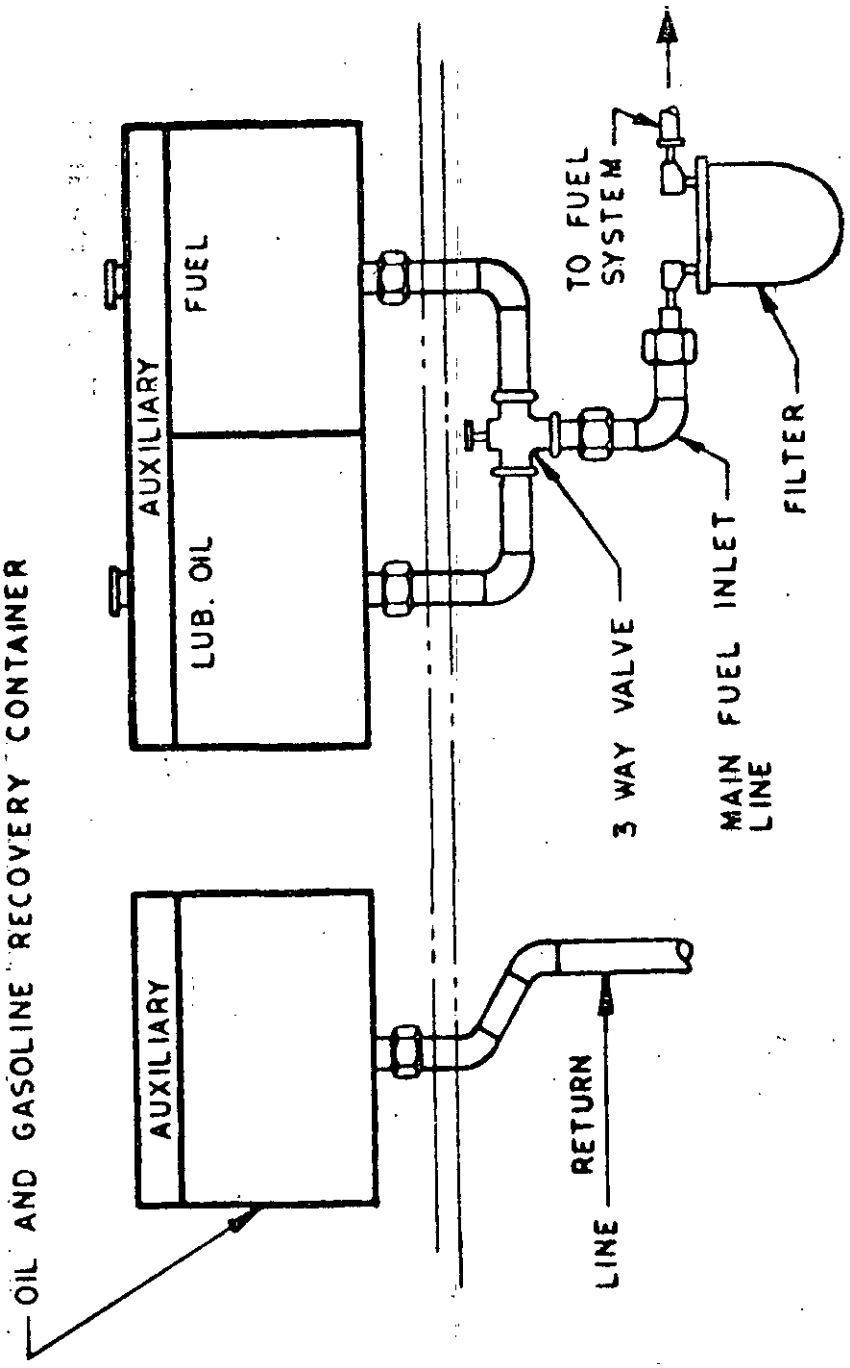


FIGURE 1. ENGINE PROCESSING.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

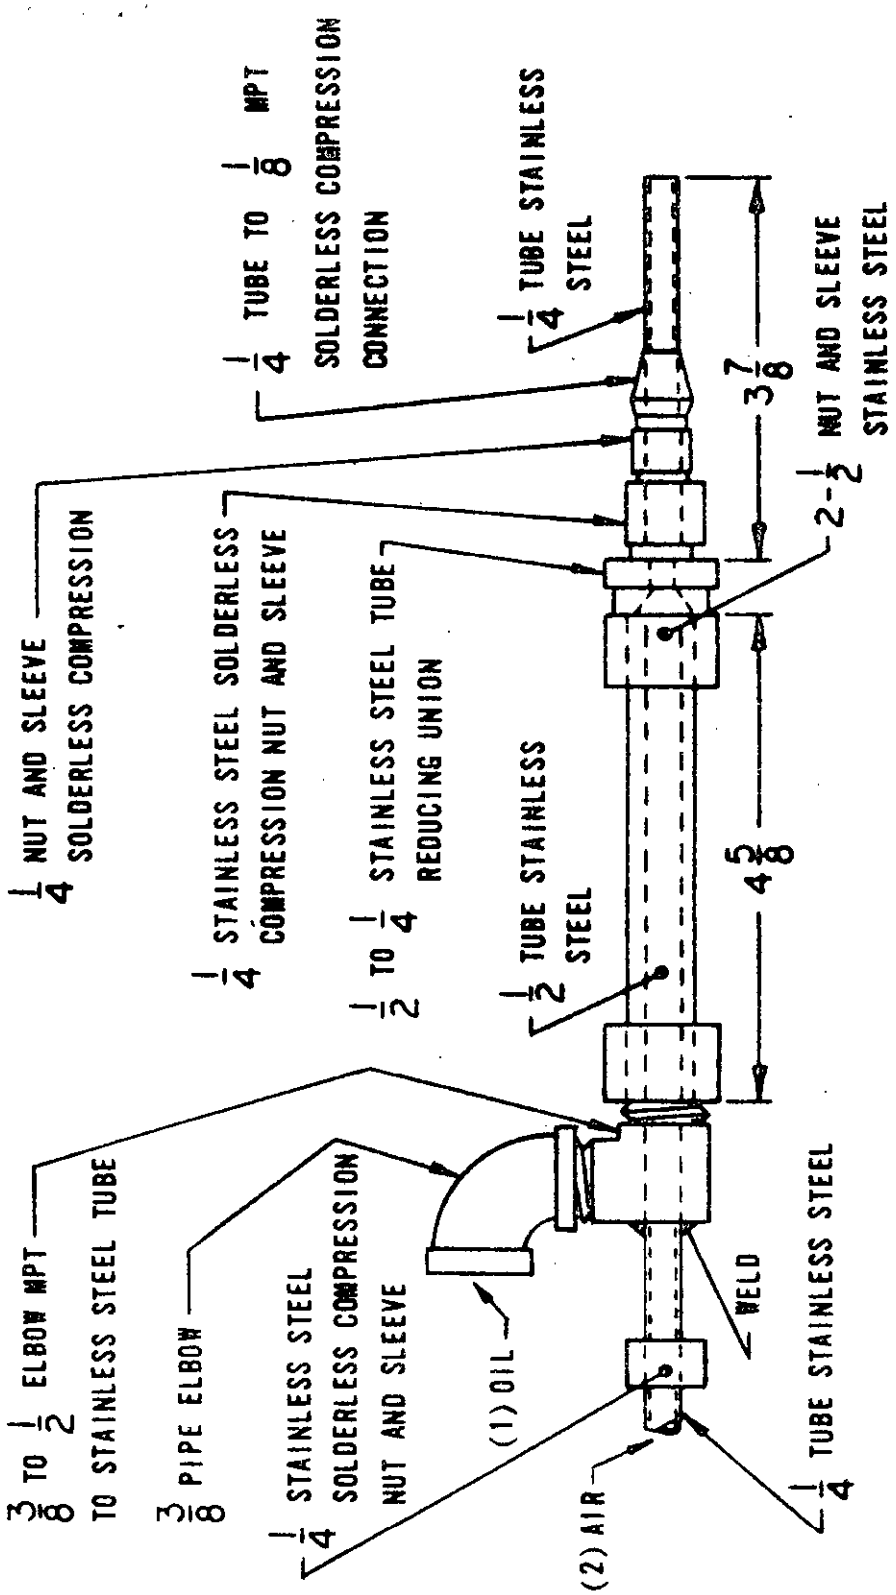


NOTE: (1) AND (2) CONNECT TO CORRESPONDING LINES ON FIGURE 3

FABRICATION DETAILS FOR OIL SPRAY ATOMIZING NOZZLE

FIGURE 2. INJECTION DEVICE.

Source: https://assist.dla.mil Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

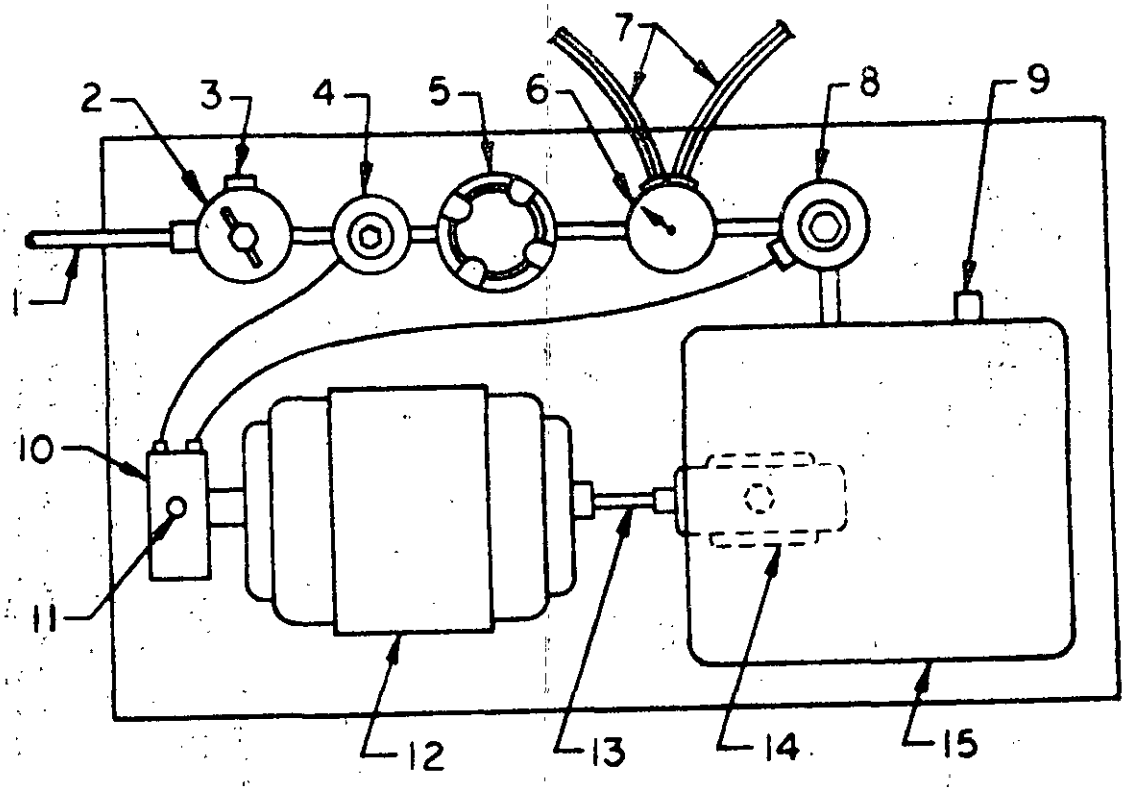

1. AIR LINE
2. AIR PRESSURE REGULATOR
3. AIR PRESSURE GAGE
4. SOLENOID VALVE
5. MOISTURE SEPARATOR
6. OIL PRESSURE GAGE
7. TWO DOUBLE TAPED LINES
8. SOLENOID VALVE
9. OIL TANK LEVEL GAGE
10. ELECTRIC JUNCTION BOX
11. ELECTRIC LINE
12. MOTOR 1/4 H.P
13. SHAFT
14. POSITIVE DISPLACEMENT OIL PUMP
15. OIL TANK

NOTE:
THIS EQUIPMENT HAS PROVEN SATISFACTORY FOR ATOMIZED SPRAYING OF PRESERVATIVE OIL IN CONJUNCTION WITH FIGURE 2.

FIGURE 3. PRESSURE PUMP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

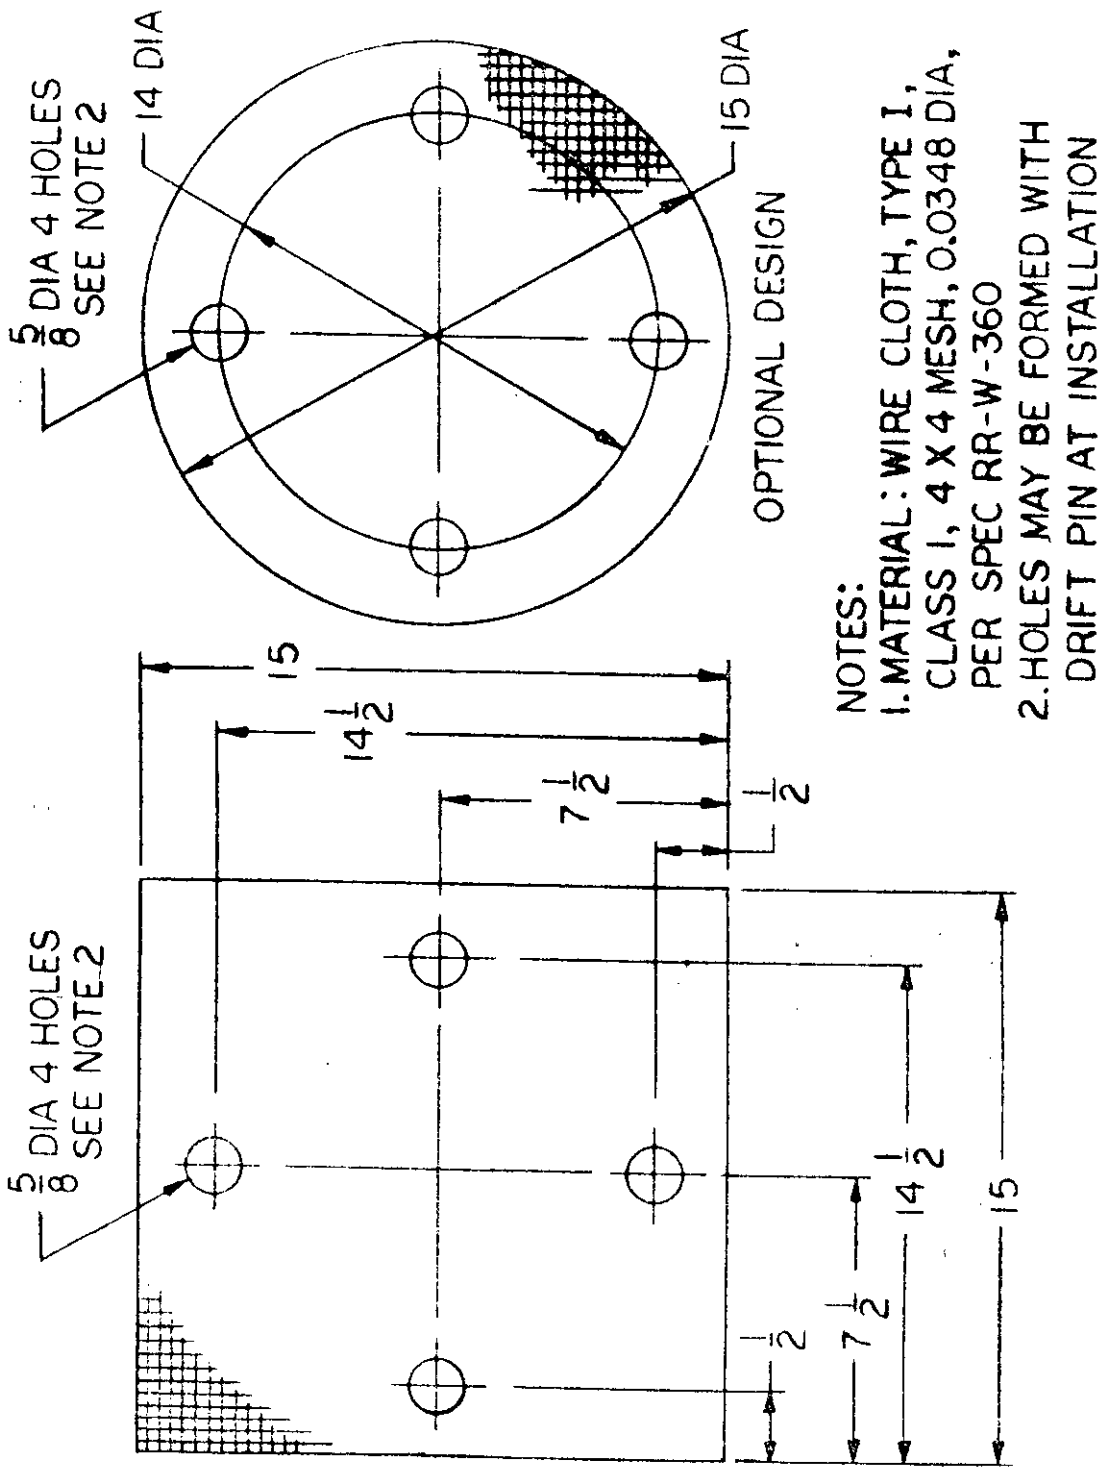


FIGURE 4. SCREEN.

Source: https://assist.dla.mil -- Downloaded: 202640-22T06:50Z
Check the source to verify that this is the current version before use.

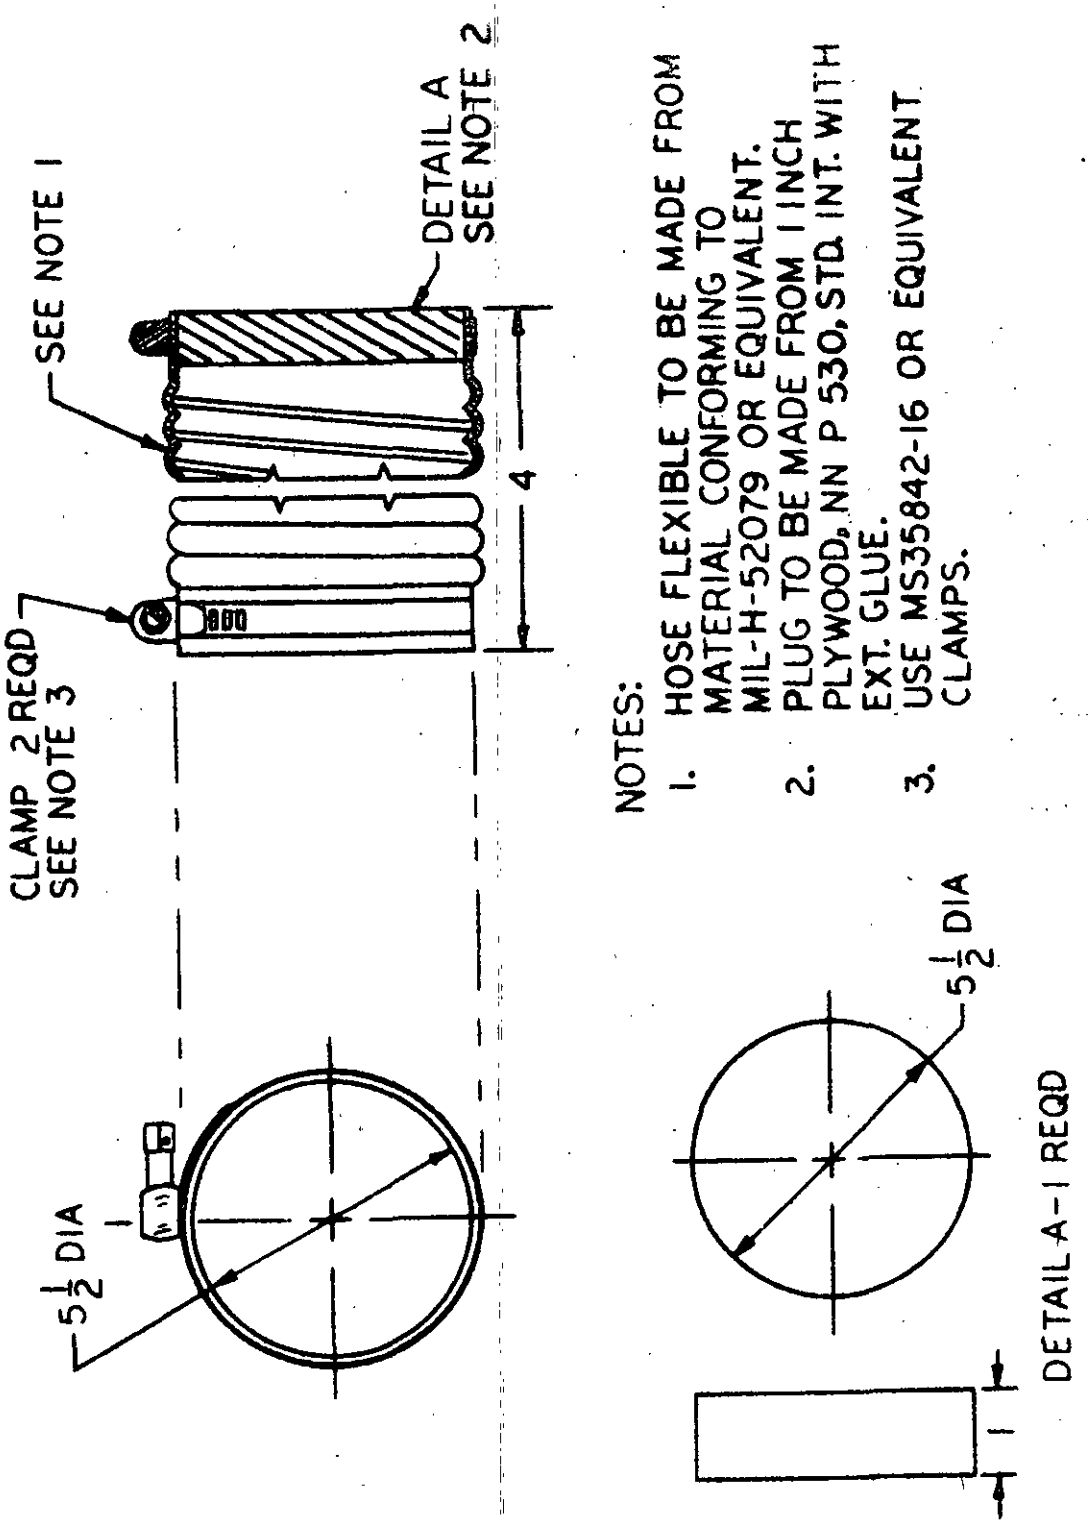


FIGURE 5. Boot air restrictor.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

APPENDIX A

REQUIREMENTS FOR FABRICATING, ASSEMBLING, INSTALLING, REMOVING, DISASSEMBLING, AND PRESERVING, PACKAGING, AND PACKING VEHICLE CLOSURE FOR M577 AND M577A1

10. SCOPE

10.1 Scope. This appendix covers the requirements for fabricating, assembling, installing, removing, and disassembling the vehicle closure and for preserving, packaging, and packing the disassembled vehicle closure for the M577 and M577A1.

20. APPLICABLE DOCUMENTS

20.1 Issues of documents. The following documents, of the issue in effect on the date of invitation for bid or request for proposal, form a part of this appendix to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-295	- Thread, Nylon.
QQ-A-200/4	- Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded.
QQ-A-200/5	- Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded.
QQ-A-200/8	- Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded.
QQ-A-200/9	- Aluminum Alloy Bar, Rod, Shapes, Tube and Wire, Extruded.
QQ-A-225/8	- Aluminum Alloy Bar, Rod Wire and Special Shapes, Rolled Drawn, or Cold Finished.
QQ-B-613	- Brass, Leaded and Nonleaded, Flat Products (Plate, Bar, Sheet, and Strip).
QQ-P-416	- Plating, Cadmium (Electrodeposited).
QQ-S-634	- Steel, Bar, Carbon, Cold Finished, (Standard Quality).
QQ-S-698	- Steel, Sheet and Strip, Low-Carbon.
QQ-S-741	- Steel, Carbon, Structural Shapes, Plates and Bars.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

QQ-T-830	- Tube, Steel, (Carbon, Mechanical, Seamless and Welded).
TT-C-490	- Cleaning Methods, and Pretreatment of Ferrous Surfaces and Organic Coatings.
TT-E-485	- Enamel, Semi-gloss, Rust-inhibiting.
TT-E-529	- Enamel, Alkyd, Semi-gloss.
TT-P-636	- Primer Coating, Alkyd, Wood and Ferrous Metal.
WW-T-700/4	- Tube, Aluminum Alloy, Round, Square, Rectangular, and other Shapes, Drawn, Seamless.
WW-T-700/5	- Tube, Aluminum Alloy, Drawn, Seamless.
WW-T-700/6	- Tube, Aluminum Alloy, Drawn, Seamless.
ZZ-T-351	- Tip, Cane Crutch, Rubber.
MMM-A-189	- Adhesive, Synthetic Rubber (Hot or Cold Bonding).

MILITARY

MIL-F-459	- Finish, Chemical, Black, for Copper Alloys.
MIL-P-15328	- Primer (Wash), Pretreatment, Blue (Formula No. 117-B for Metals).
MIL-E-16053	- Electrodes, Welding, Bare, Aluminum Alloys.
MIL-P-20689	- Plastic, Plastisol (for Coating Metallic Objects).
MIL-C-20696	- Cloth, Coated, Nylon, Waterproof.
MIL-W-45205	- Welding, Gas Metal-arc and Gas Tungsten-arc, Aluminum Alloys, Readily Weldable for Structures, Excluding Armor.

STANDARDS

FEDERAL

FED-STD-595	- Color.
FED-STD-751	- Stitches, Seams, and Stitching.

MILITARY

MIL-STD-8	- Dimensioning and Tolerancing.
MIL-STD-1261	- Welding Procedures for Constructional Steels.

Source: https://assist.dla.mil -- Downloaded: 20260-22T06:50Z
Check the source to verify that this is the current version before use.

MS21044	- Nut, Self-locking, Hexagon, Regular Height, 250°F, 125 Ksi Ftu and 60 Ksi Ftu.
MS21083	- Nut, Self-locking, Hexagon, Nonmetallic, Insert Low Height, 250°F.
MS27183	- Washer, Flat-round, Steel, Cadmium Plated, General Purpose.
MS35207	- Screw, Machine-pan Head, Cadmium Plated.
MS51922	- Nut, Self-locking, Hexagon-prevailing Torque, General Purpose, 250°F, UNC-2B and UNF-2B.
MS90725	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Medium Carbon Steel, Cadmium Plated, UNC-2A.
MS90726	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Medium Carbon Steel, Cadmium Plated, UNF-2A.

PUBLICATIONS

DRAWINGS

ARMY

114838	- Washer.
116263	- Double Stud.
116267	- Washer.
116268	- Eyelet.
7392987	- Grommets and Washers, Oblong.
7392993	- Grommets and Washers, Oblong.
10906339	- Tip, Cane and Crutch.
10922144	- Fastener.

PACKAGING DATA SHEETS

10918220	- Closure Kit, Vehicle Protective, M577 and M577A1.

30. REQUIREMENTS

30.1 Vehicle closure. The vehicle closure (figure 6) consists of a frame assembly (figure 7) and a cover assembly (figure 30). The lower frame is assembled and installed on the vehicle, then the upper frame is assembled and attached to the lower frame, finally, the cover is installed and attached to the frame assembly.

Source: https://assist.dla.mil -- Downloaded: 202640-22T06:50Z
Check the source to verify that this is the current version before use.

30.2 Fabrication of the frame sections. Frame sections shall be fabricated in accordance with figures 9 through 29. When permitted by optional material callouts, frame sections may be fabricated from either steel or aluminum. However, when mating a steel with an aluminum part, bare steel contact against aluminum shall not be permitted.

30.3 Fabrication of cover. Cover shall be fabricated in accordance with figures 30 through 44.

30.4 Assembly and installation.

30.4.1 Attitude of fasteners. Except for the 8 screws used to attach frame section figures 17, 18, and 19 to connectors figure 20, all screws in the frame assembly shall be installed with the threaded ends pointing down or toward center of the assembly.

30.4.2 Assembly of lower frame.

a. Form 2 angle assemblies by joining 3 frame sections, figure 29, using 2 connectors, figure 27, 12 screws, figure 8-2, and 12 nuts, figure 8-5, for each assembly (see detail D, figure 9).
b. Form an angle assembly by joining 1 frame section, figure 28-1 and 1 frame section figure 28-2 using 1 connector, figure 20, 6 screws, figure 8-2, and 6 nuts, figure 8-5 (see detail C, figure 9).
c. Form an angle assembly by joining 1 frame section, figure 12-1 and 1 frame section, figure 12-2, using connector, figure 20, 6 screws, figure 8-2, and 6 nuts, figure 8-5. Next attach 1 frame section, figure 10-1, and 1 frame section figure 10-2 to each end of this angle assembly using the mounting holes near the center of frame sections with 4 screws, figure 8-2, and 4 nuts, figure 8-5 (see figure 9 view BB).
d. Join the 4 angle assemblies formed in steps a, b, and c at corners using 4 connectors, figure 11, 16 screws, figure 8-2, and 16 nuts, figure 8-5 (see figure 9).
e. Form an angle assembly by joining 1 frame section figure 13, and 1 frame section, figure 14, using 1 connector, figure 20, 6 screws, figure 8-2, and 6 nuts, figure 8-5. Attach this angle assembly to assembly formed in step 30.4.2 (d), using 2 supports, figure 15, 8 screws, figure 8-2, and 8 nuts, figure 8-5 (see figure 9). This completes the lower frame assembly.

Source: https://assist.dla.mil -- Downloaded: 202640-22T06:50Z
Check the source to verify that this is the current version before use.

30.4.3 Installation of lower frame on vehicle.

a. Lower the trim vane.
b. Raise and lock the ramp.
c. Close all hatches.
d. Lift the lower frame assembly on the vehicle so that the slots in frame sections, figure 10, line up with holes in existing bracket on rear of vehicle (see figure 6, sheet 2, detail C). Attach lower frame frame to bracket using 2 screws, figure 8-10, 2 washers, figure 8-11, and 2 nuts, figure 8-12. Next attach 2 supports, figure 43, to support, figure 15, using 2 screws, figure 8-7, 2 washers, figure 8-8, and 2 nuts, figure 8-9. Remove the 2 track shroud bolts which will match holes in the supports. Place 3 washers figure 8-11 between shrouds using existing 2 washers and 2 screws (see section AA, figure 6, sheet 2).

30.4.4 Assembly of upper frame.

a. Form an angle assembly by joining 1 frame section, figure 17-1, 1 frame section, figure 18, and 1 frame section, figure 17-2, using 2 connectors, figure 20, 12 screws, figure 8-2, and 12 nuts, figure 8-5 (See 30.41 for position of screws).
b. Form an angle assembly by joining 1 frame section, figure 17-2, 1 frame section, figure 18, and 1 frame section, figure 19, using 2 connectors, figure 20, 12 screws, figure 8-2, and 12 nuts, figure 8-5 (See 30.4.1 for position of screws).
c. Form 2 angle assemblies by joining 1 frame section, figure 12-2, using 1 connector, figure 20, 6 screws, figure 8-2, and 6 nuts figure 8-5, for each assembly.
d. Join the 4 angle assemblies formed in steps a, b, and c at corners using 4 connectors, figure 11, 16 screws, figure 8-2, and 16 nuts, figure 8-5 (see figure 9).
e. Form an angle assembly by joining 1 frame section, figure 13, and 1 frame section, figure 14, using 1 connector, figure 20, 6 screws, figure 8-2, and 6 nuts, figure 8-5. Attach this angle assembly to assembly formed in step 30.4.2 (d), using 2 supports,

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the currentversion before use.

figure 15, 8 screws, figure 8-2, and 8 nuts, figure 8-5 (see figure 9). This completes the lower frame assembly.

f. Attach the tube assembly to inside of frame assembly formed in step (d) using 14 screws, figure 8-2, and 14 nuts, figure 8-5.

g. Position upper frame assembly, step (f), so that cutout in frame section figure 19 will be located at the right rear corner of the vehicle. Lift assembly onto vehicle and attach to frame sections, figure 10 using 4 screws, figure 8-2, and 4 nuts, figure 8-5. Then attach 1 frame section, figure 16-1, and frame section figure 16-2 between upper and lower frame using 8 screws, figure 8-2, and 8 nuts, figure 8-5.

h. Attach 26 fasteners, figure 8-6, to lower frame as shown on figure 6, using 26 screws, figure 8-1, and 26 nuts, figure 8-4. This completes the frame assembly.

30.5 Installation of cover.

a. Unfold the cover, figure 30, and install it over the frame assembly with vent covers and access openings on the outside.

b. Fold the cover flaps and insert 10 rods, figure 44 (see figure 6, sheet 2). Clamp rods using 26 fasteners, figure 8-6, which were attached in step 30.4.4 (h) (see detail B, figure 6, sheet 2).

c. Lower cover flaps.

d. Raise trim vane. This completes closure installation.

30.5.1 Removal of cover.

a. Lower the trim vane.

b. Fold up cover flaps and release 26 rod fasteners.

c. Withdraw 10 rods from cover.

d. Remove cover from frame.

30.5.2 Removal of frame.

a. Remove 9 screws at top of angles which hold the upper and lower frame together and remove upper frame.


Source: https://assist.dla.mil -- Downloaded: 202640-22T06:50Z
Check the source to verify that this is the current version before use.

b. Remove 2 screws and 8 washers which attach the frame tiedown supports to the track shroud. Replace the 2 screws and 2 of the washers in the track shroud.
c. Remove the 2 screws and nuts which attach the tiedown supports to the frame.
d. Remove the 2 screws and nuts which attach lower frame assembly to bracket on rear of vehicle.
e. Remove lower frame.
f. Raise trim vane.

30.5.3 Disassembly of frame. Disassemble frame by removing screws and nuts from all joints and connectors.

30.6 Preservation, packaging, and packing. The disassembled vehicle closure shall be preserved, packaged and packed in accordance with packaging data sheet 10918220.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

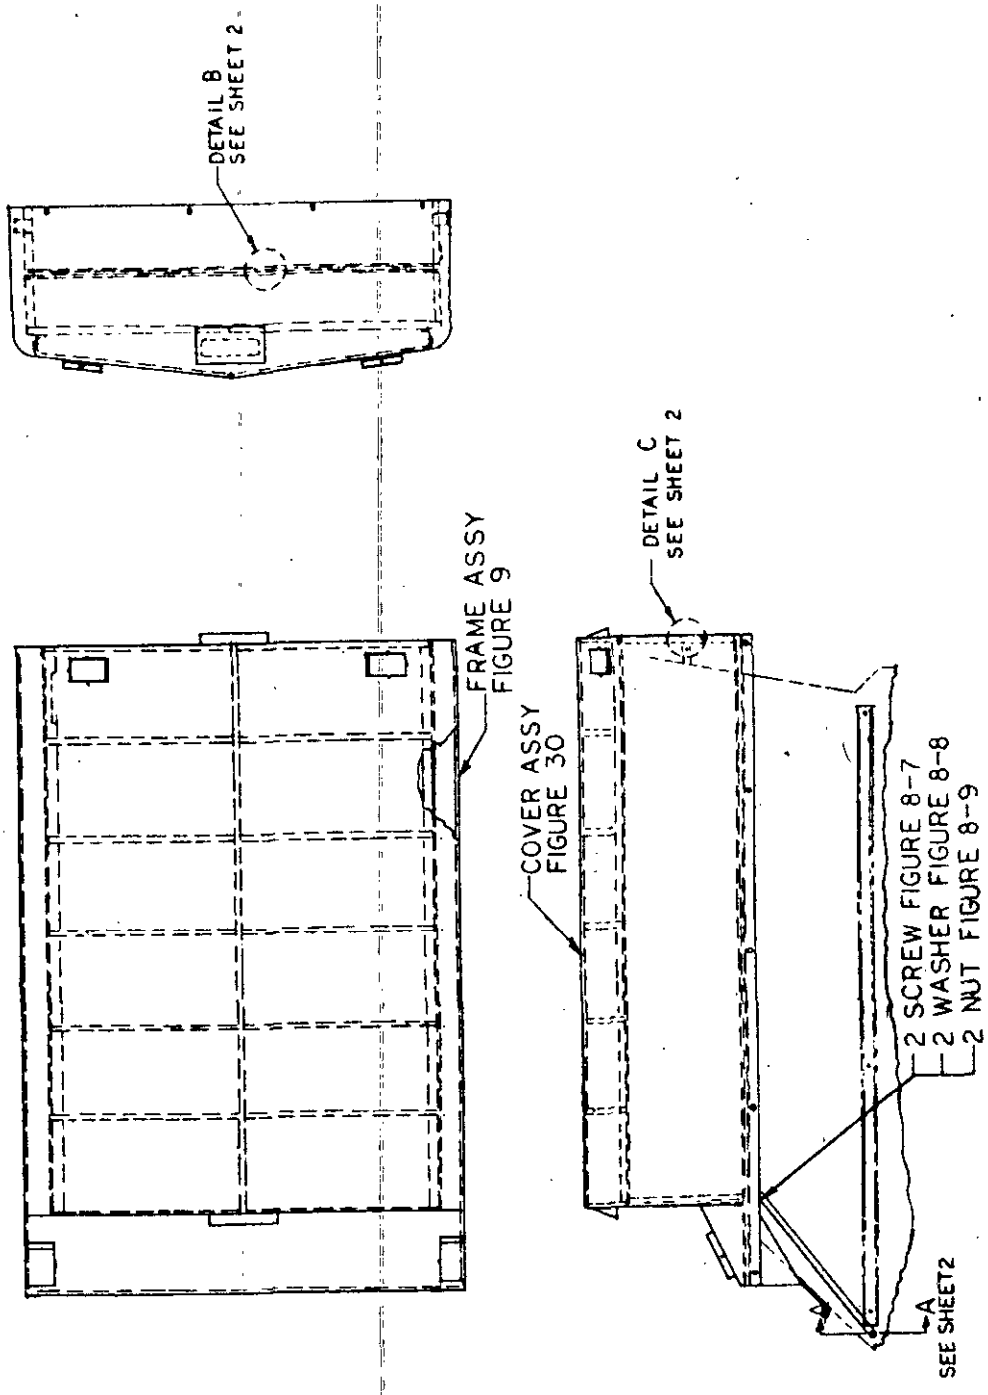



SHEET 1 OF 2


FIGURE 6. VEHICLE CLOSURE KIT.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

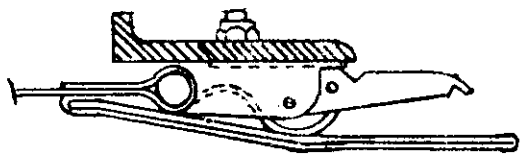

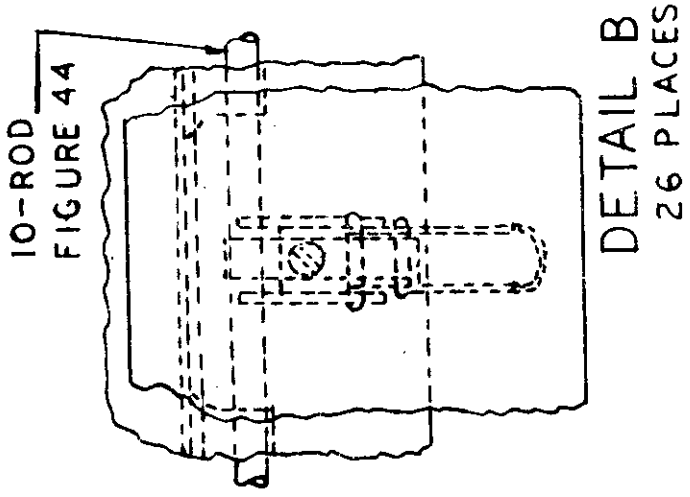

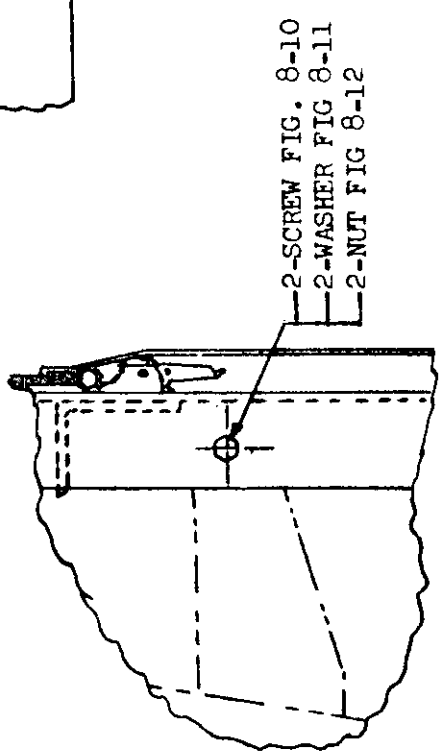

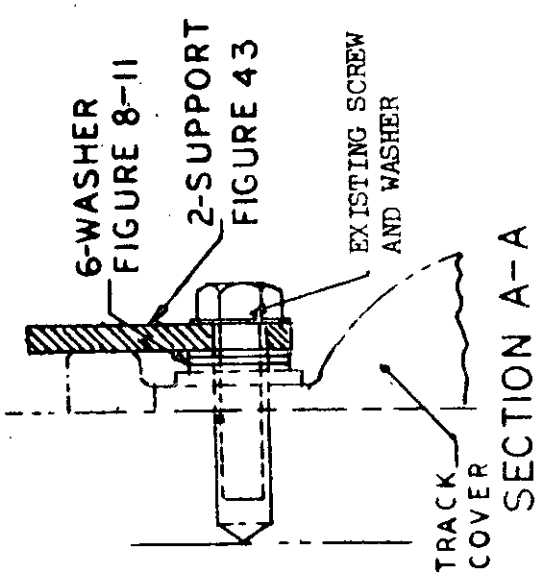

SHEET 2 OF 2

FIGURE 6. VEHICLE CLOSURE KIT. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

FIGURE NO.	DESCRIPTION	QTY REQ'D
6	Vehicle Closure Kit Consisting of:	1
43	Support	2
44	Rod	10
9	Frame Assembly Consisting of:	1
10-1	Angle, Frame Section	1
10-2	Angle, Frame Section	1
11	Connector, Lower Frame	4
12-1	Angle, Frame Section	3
12-2	Angle, Frame Section	3
13	Angle, Frame Section	1
14	Angle, Frame Section	1
15	Frame Support	2
16-1	Angle Frame Section	1
16-2	Angle Frame Section	1
17-1	Angle Frame Section	1
17-2	Angle Frame Section	2
18	Angle Upper Frame	1
19	Angle Upper Frame	1
20	Connector, Frame	2
21	Tube Metal	14
22-1	Tube Center Top	2
22-2	Tube Center Top	1
23	Connector Tube	7
24	Connector Tube	2
25	Tubing Section End Top	2
26	Tubing Section Center Top	1
27	Connector, Lower Frame	4
28-1	Angle Lower Front	1
28-2	Angle Lower Front	1
29	Angle Lower Frame	6

SHEET 1 OF 2

FIGURE 7. PARTS LIST-VEHICLE CLOSURE KIT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

FIGURE NO.	DESCRIPTION	QTY REQ'D
30	Cover Vehicle Closure Consisting of:	
31	Cover, Vehicle Cover	1
32-1	Flap, Cover	1
32-2	Flap, Cover	1
33-1	Flap, Cover	1
33-2	Flap, Cover	1
34	Reinforcing Strip	3
35	Vent, Cover	2
36	Cover, Vent	2
37	Stiffener, Vent Cover	2
38	Access, Opening	4
39	Flap, Extension	2
40	Access, Opening Assy	4
41	Insert, Access Opening	4
42	Access, Cover Opening	4

SHEET 2 OF 2


FIGURE 7. PARTS LIST-VEHICLE CLOSURE KIT. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

FIGURE NO.	QTY REQD.	PART NUMBER	DESCRIPTION
			FRAME ASSEMBLY
8-1	26	MS35207-65	SCREW, MACHINE, CROSS-RECESSED PAN HD, 10-32, UNF 2A X 3/4
8-2	140	MS90725-7	SCREW, CAP, HEX HD, 1/4-20 UNC 2A X 7/8
8-3	18	MS90725-12	SCREW, CAP, HEX HD, 1/4-20, UNC 2A X 1 1/2
8-4	26	MS21044N3	NUT, SELF-LOCKING, 10-32NF
8-5	158	MS51922-1	NUT, SELF-LOCKING, 1/4-20, UNC3B
8-6	26	10922144	FASTENER
			INSTALLATION
8-7	2	MS90725-62	SCREW, HEX HD, 3/8-16, UNC 2A X 1 1/4
8-8	2	MS27183-14	WASHER 3/8 DIA.
8-9	2	MS51922-17	NUT, SELF-LOCKING, 3/8-16, UNC 3B
8-10	2	MS90726-114	SCREW, HEX HD, 1/2-20, UNF 2A X 1 3/4
8-11	8	MS27183-18	WASHER, 1/2 DIA.
8-12	2	MS21044N3	NUT, SELF-LOCKING, 1/2-20 UNF 3B
			COVER
8-13	16	116263	FASTENER, TURN BUTTON TYPE
8-14	16	114838	WASHER
8-15	16	116268	EYELET
8-16	16	116267	WASHER
8-17	18	7392987	GROMMET
8-18	18	7392993	WASHER
8-19	4	10906339	TIP, RUBBER, SIZE 15, SPEC ZZ-T-351

FIGURE 8. HARDWARE LIST.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

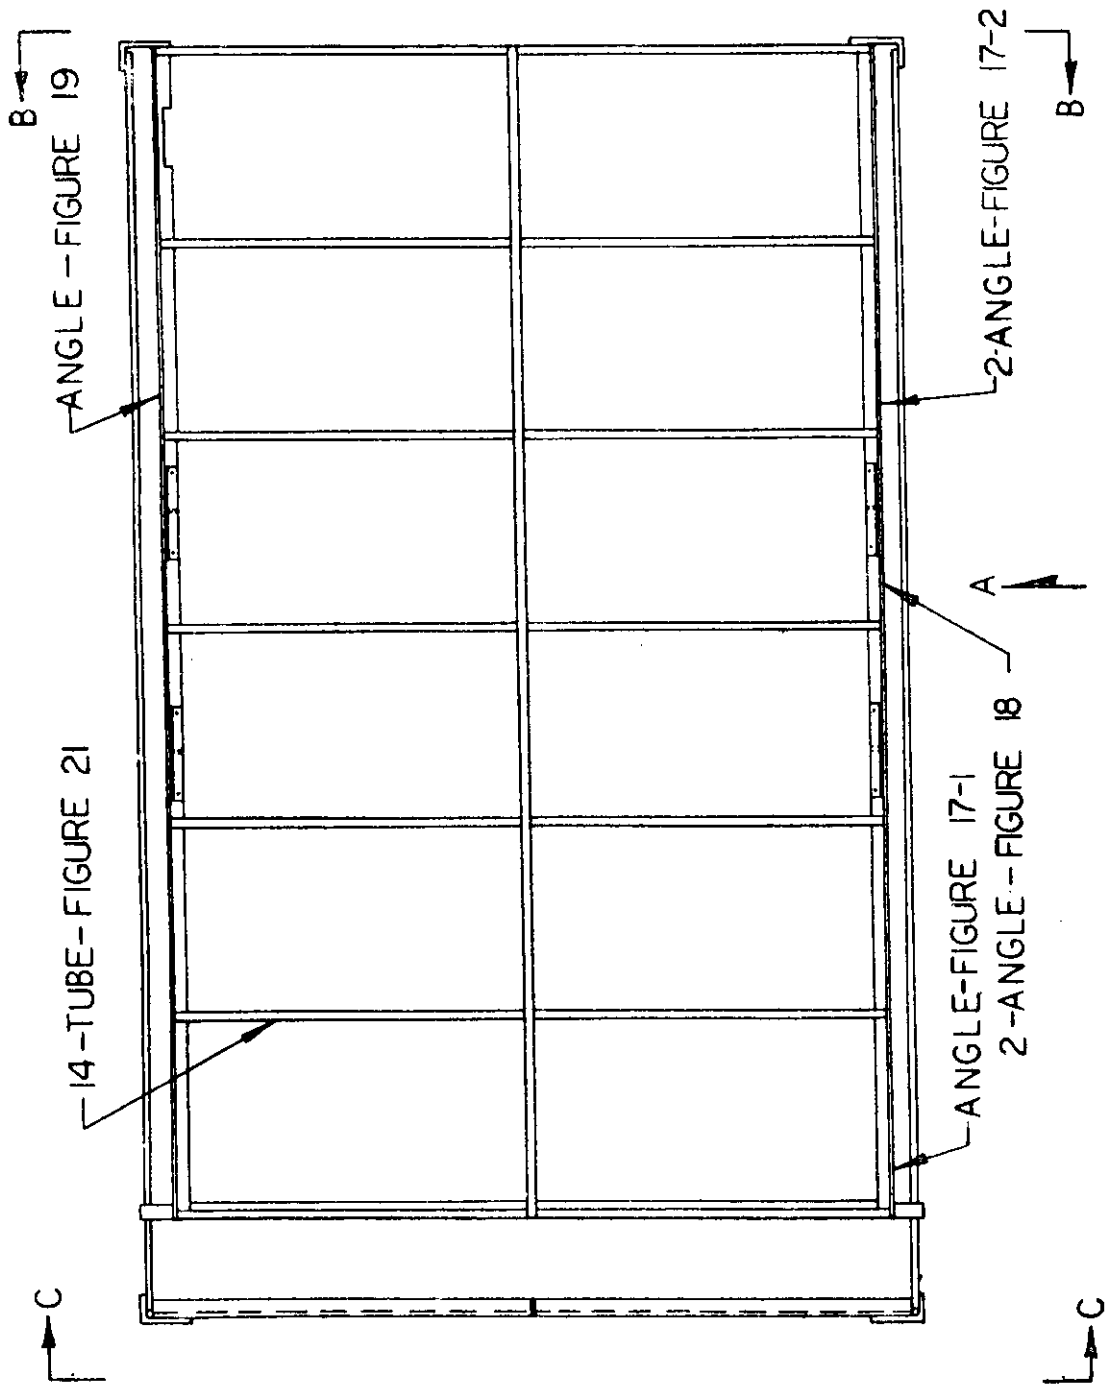

SHEET 1 OF 6

FIGURE 9. VEHICLE CLOSURE FRAME ASSEMBLY.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

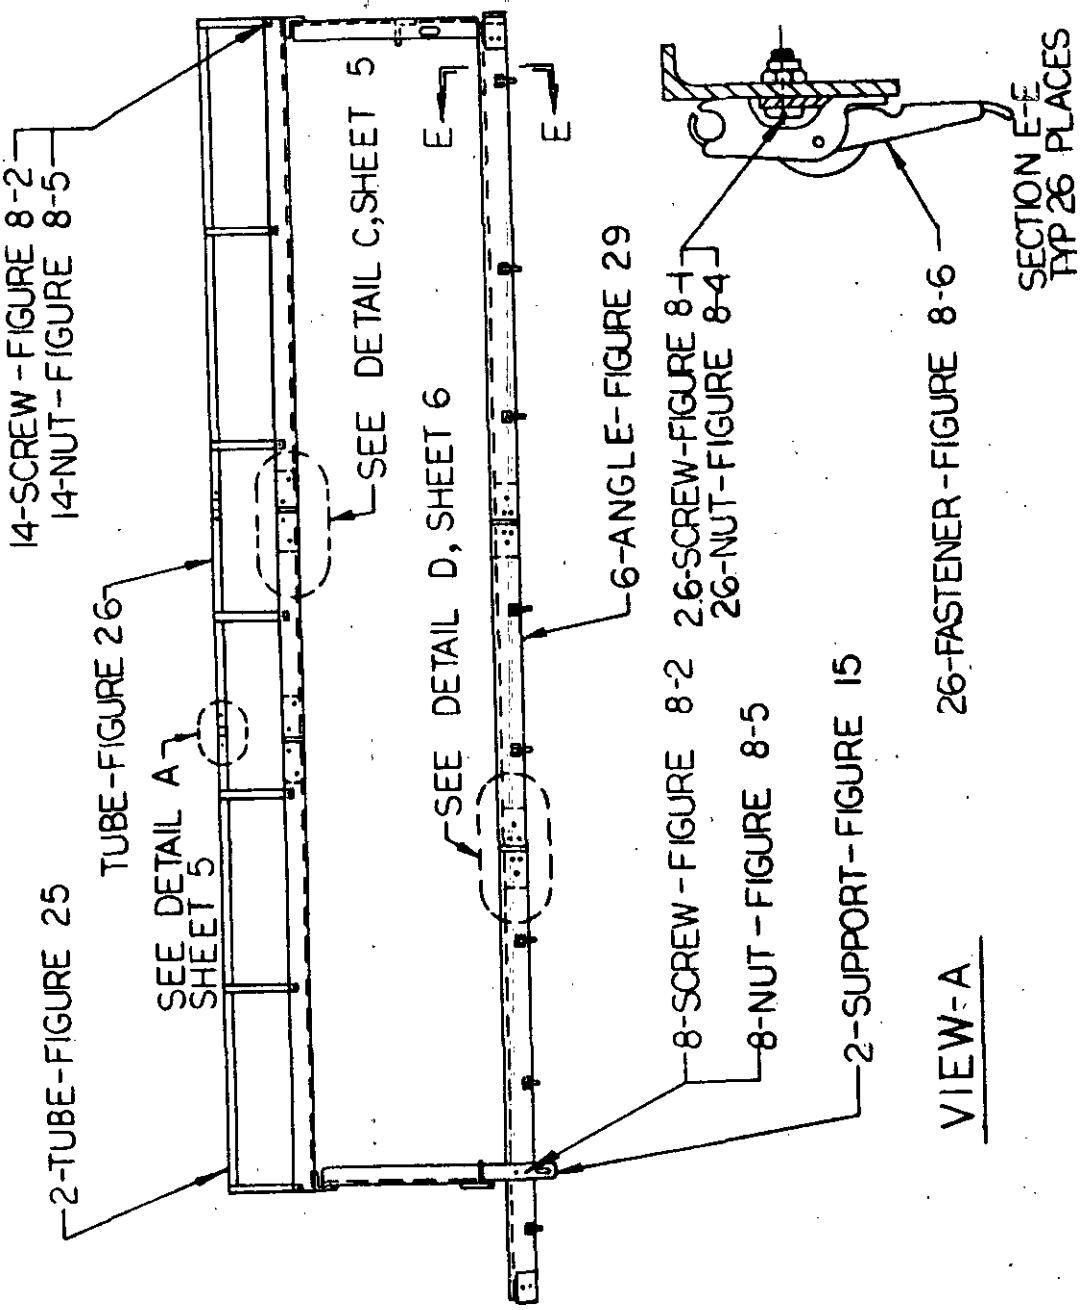

SHEET 2 OF 6

FIGURE 9. VEHICLE CLOSURE FRAME ASSEMBLY. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

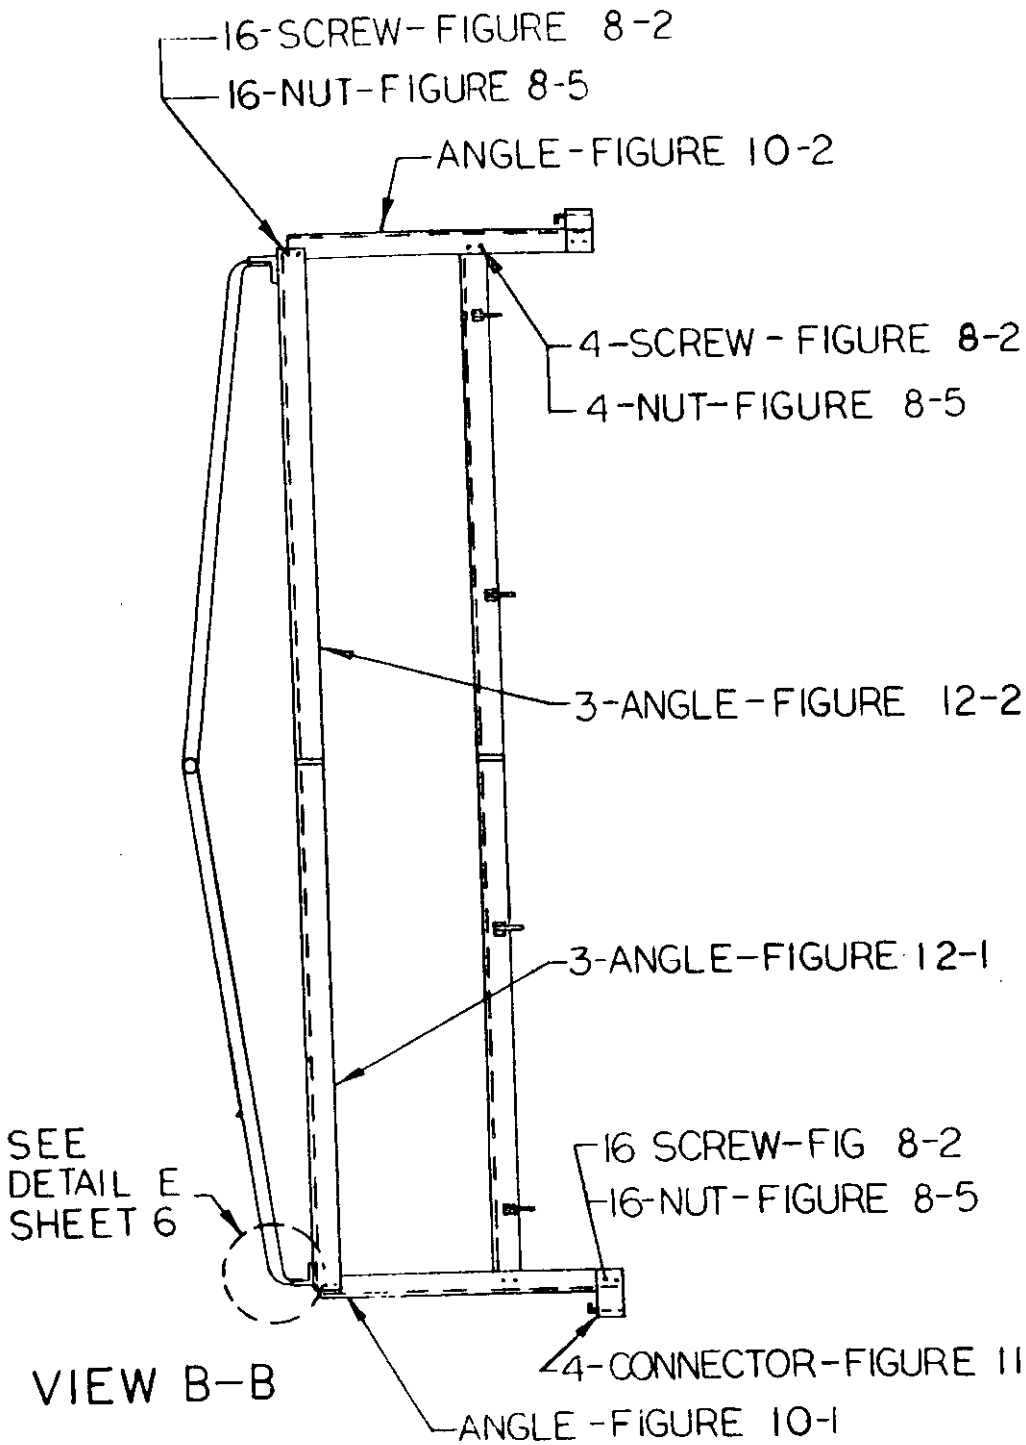

SHEET 3 OF 6

FIGURE 9. VEHICLE CLOSURE FRAME ASSEMBLY. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.


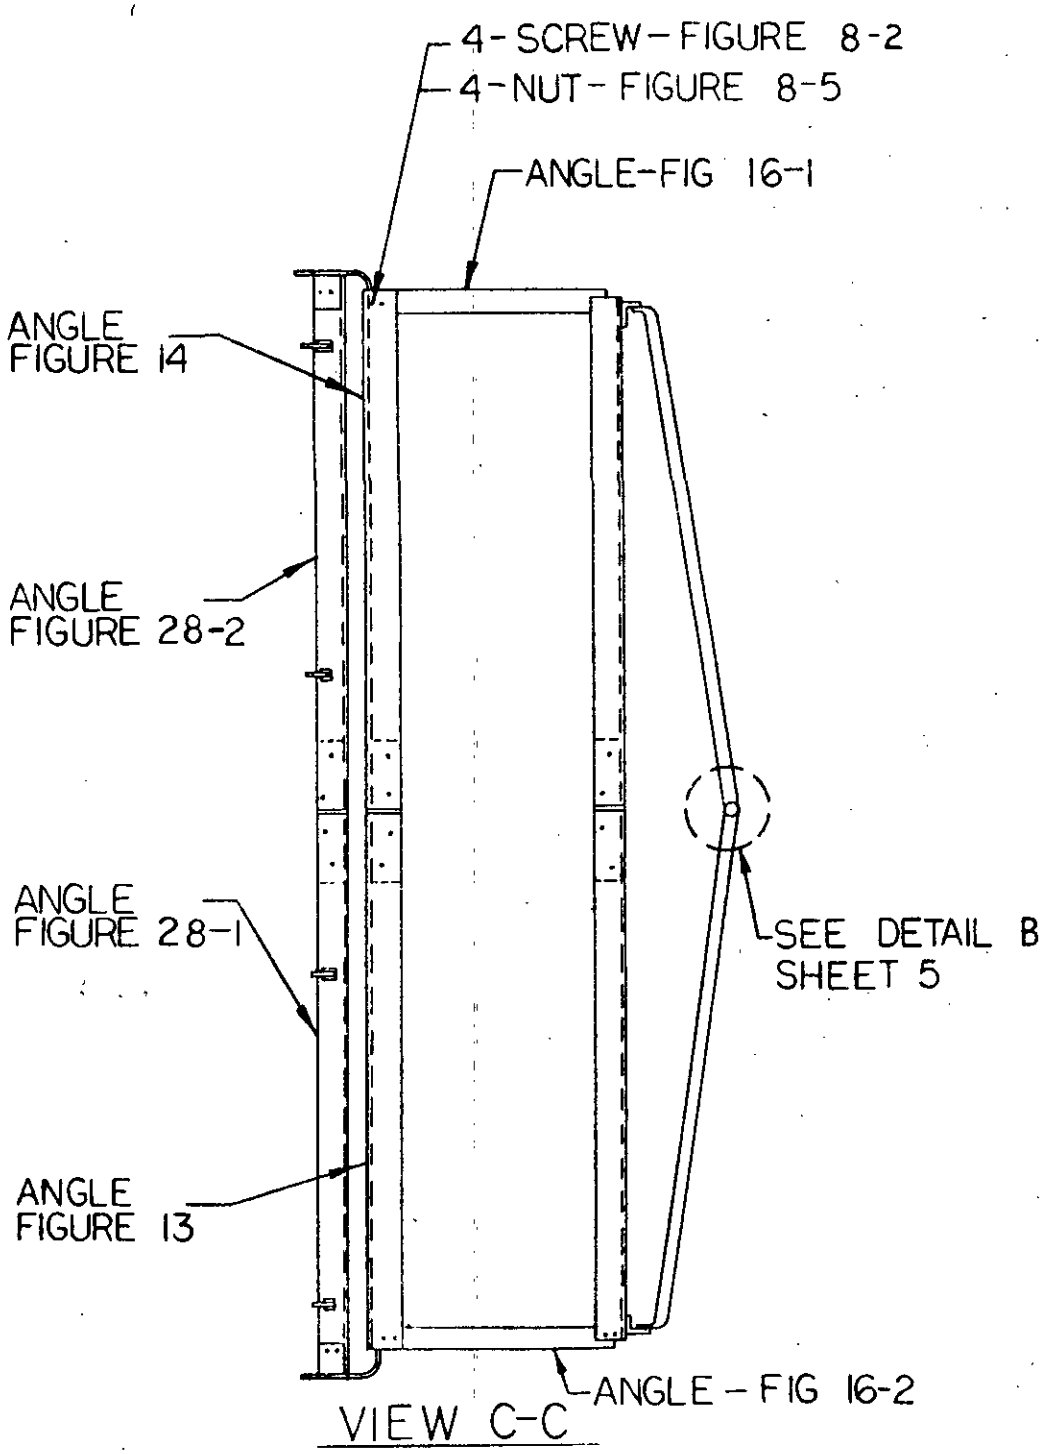


FIGURE 9. VEHICLE CLOSURE FRAME ASSEMBLY. - CONTINUED


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

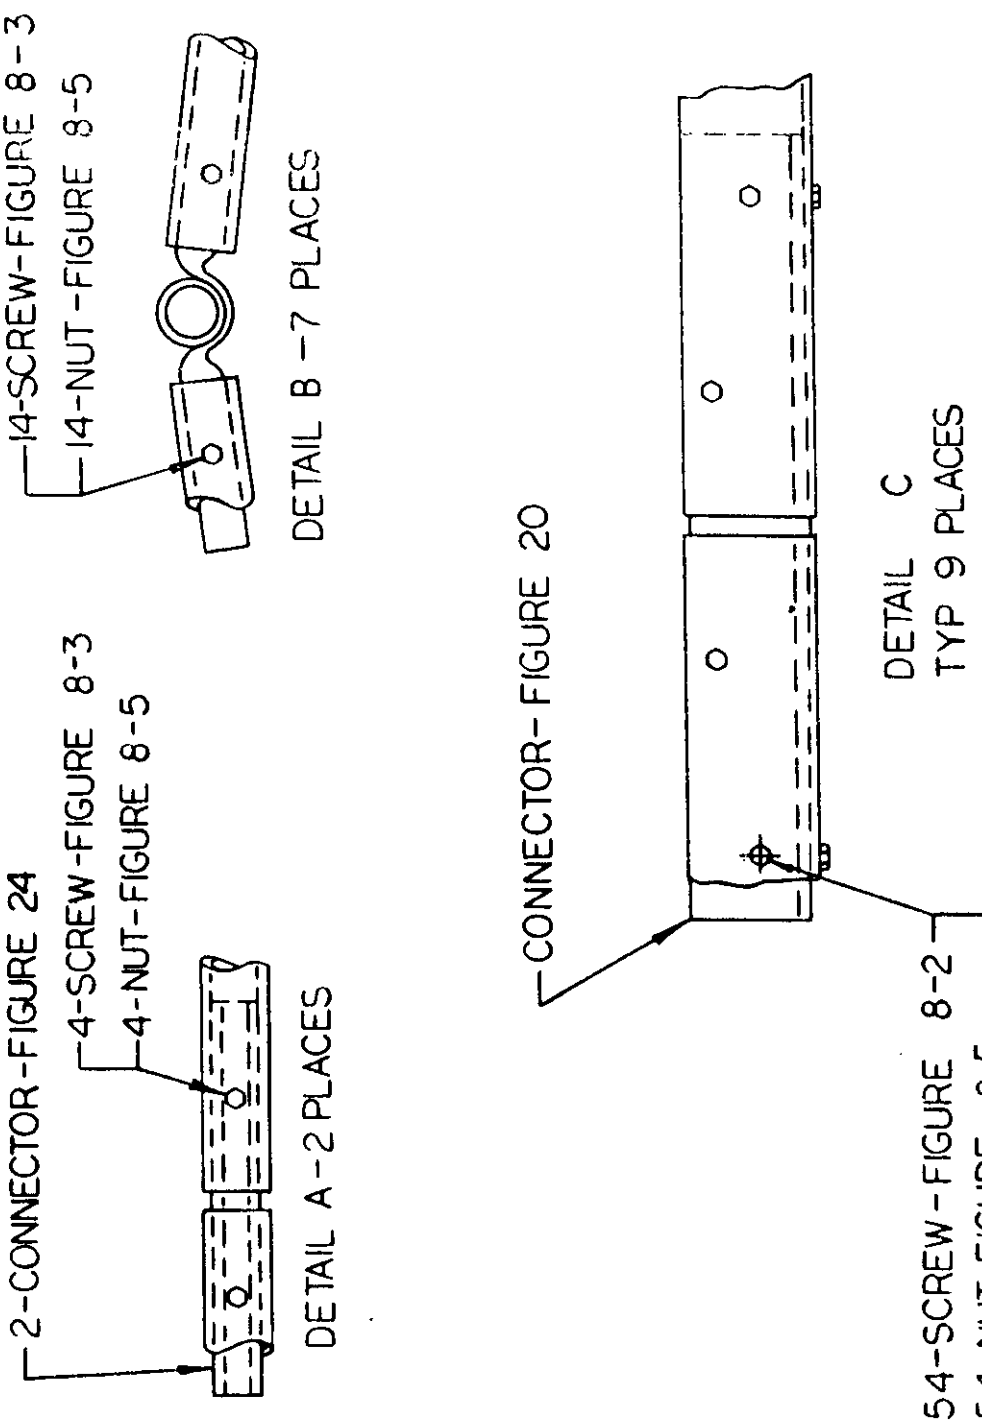

SHEET 5 OF 6

FIGURE 9. VEHICLE CLOSURE FRAME ASSEMBLY. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

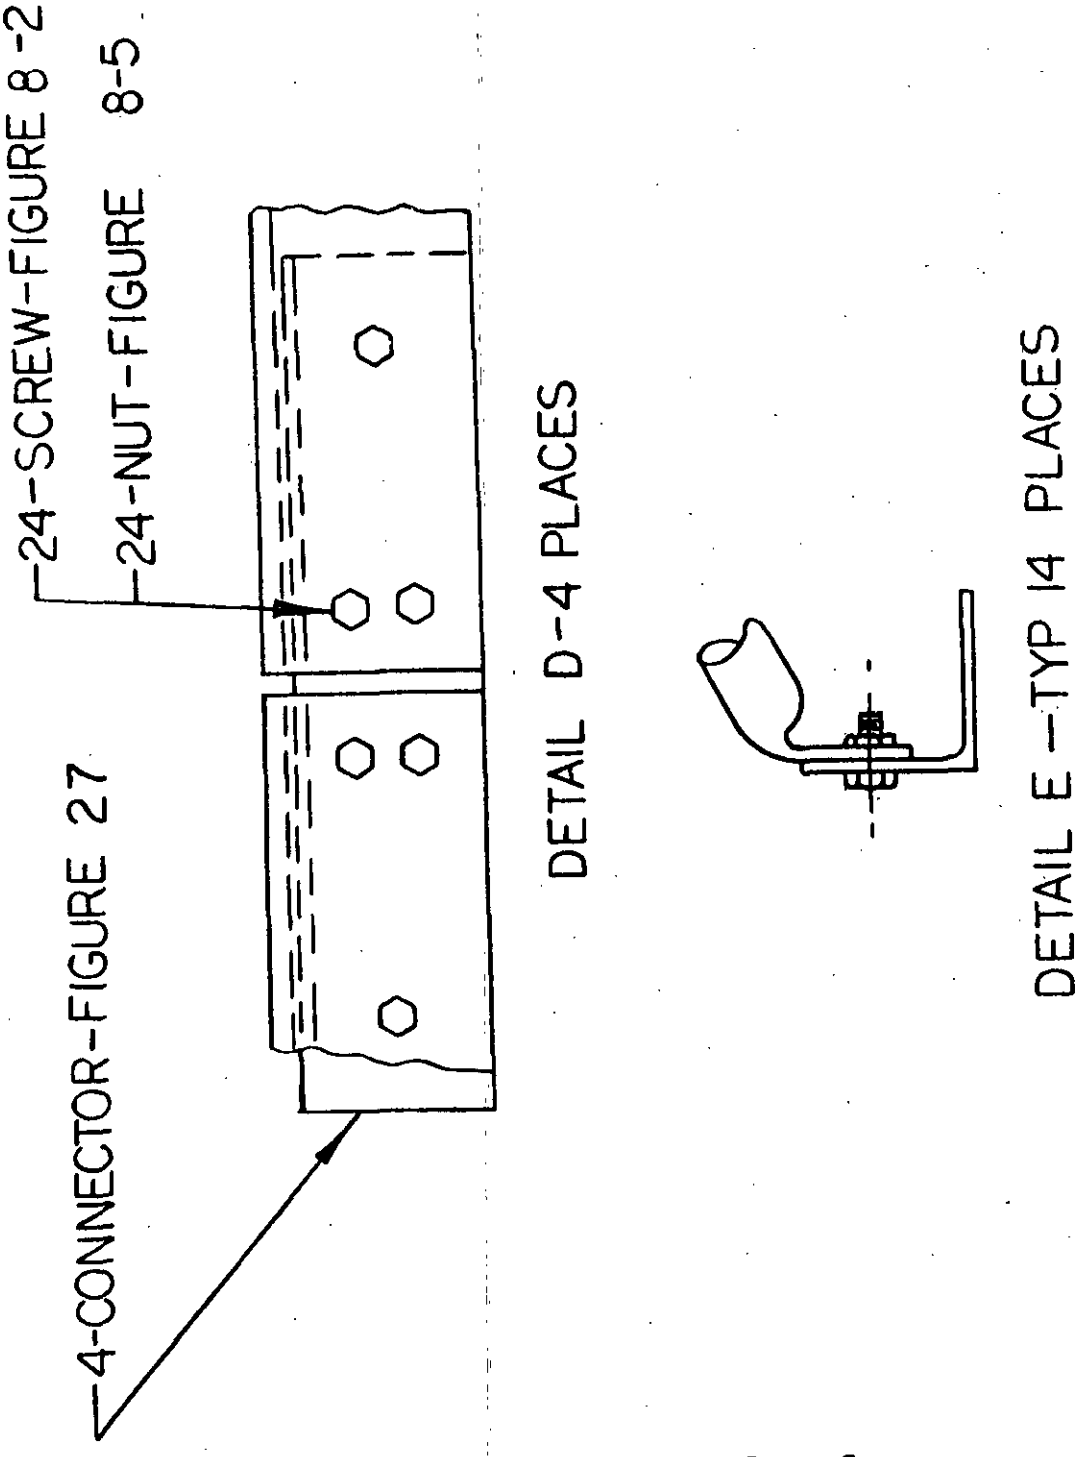

SHEET 6 OF 6

FIGURE 9. VEHICLE CLOSURE FRAME ASSEMBLY. - CONTINUED

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the currentversion before use.

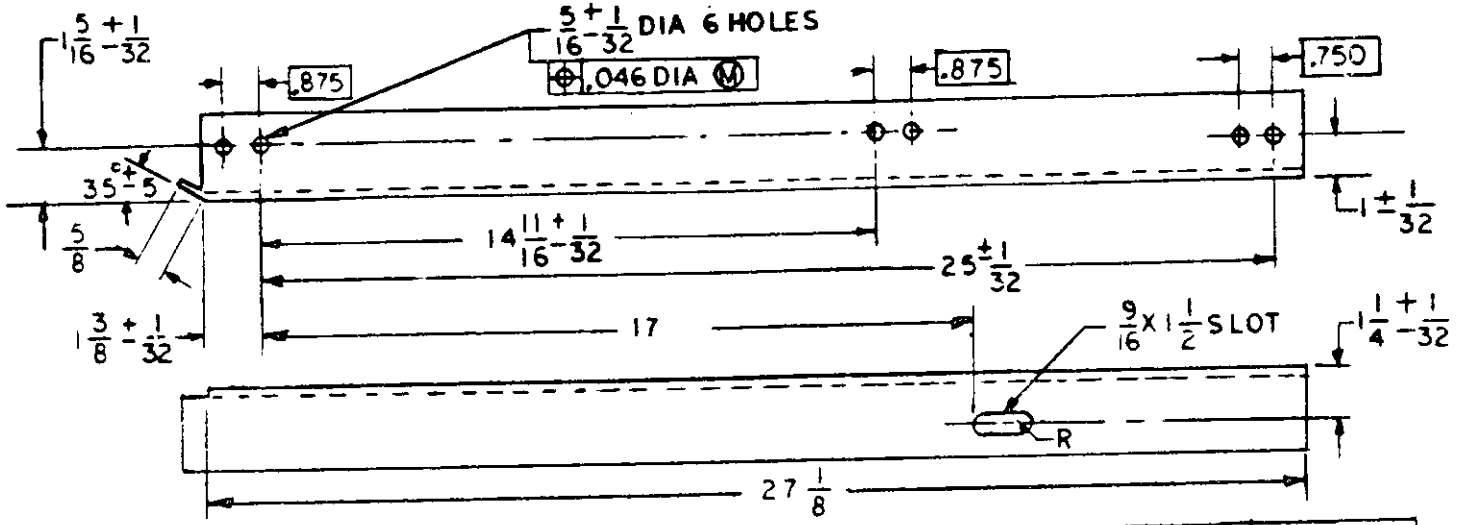


FIG NO	
10-1	SHOWN
10-2	OPPOSITE

NOTES:

1. MATERIAL: ALUMINUM, 6061-T6, SPEC QQ-A-200/8, OR
   ALUMINUM, 6061-T6, SPEC QQ-A-225/8 OR
   ALUMINUM, 5083-H111, SPEC QQ-A-200/4,
   2.000 X 2.000 X .188 ANGLE.

2. OPTIONAL MATERIAL: STEEL, CARBON, SPEC QQ-S-741, 2.000 X 2.000 X .125 ANGLE.

3. FINISH FOR STEEL ONLY:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490

   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR


   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK.

4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.

5. INTERPRET DIM. AND TOL. PER USASI Y14.5 - 1966

FIGURE 10. ANGLE, FRAME SECTION.

Source: https://assist.dla.mil -- Downloaded: 2020-10-22T06:50Z
Check the source to verify that this is the current version before use.

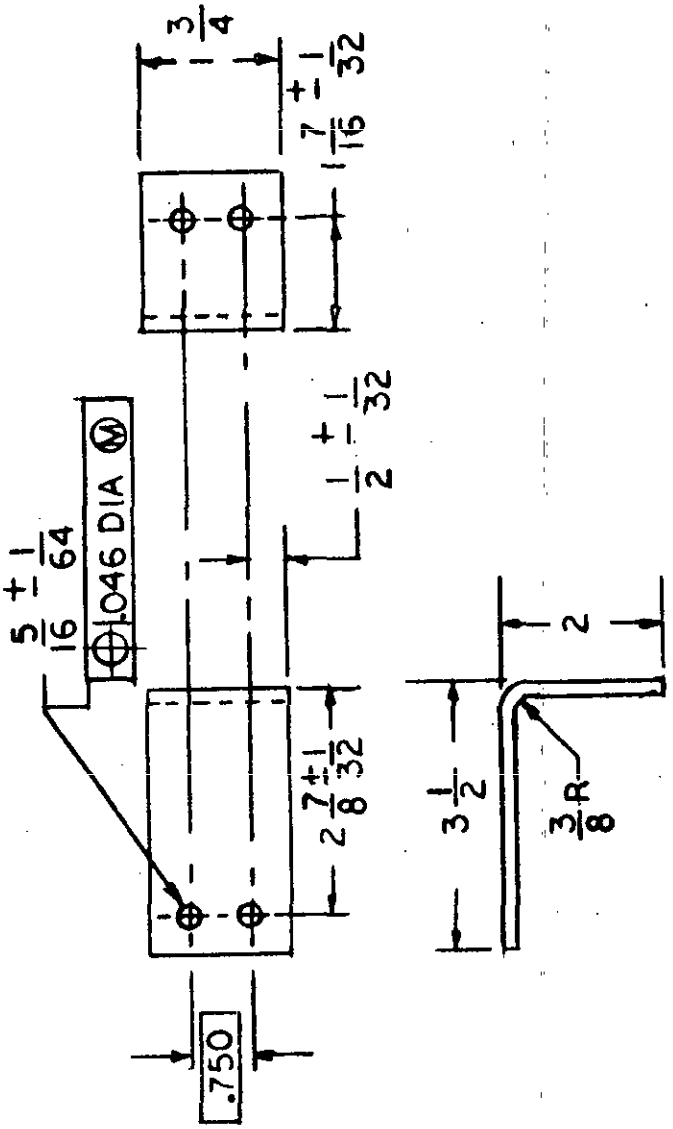

NOTES:

1. MATERIAL: CARBON STEEL, SPEC QQ-S-698, .1793 THICK SHEET OR .180 THICK STRIP.
2. FINISH:
   CAD PLATE, TYPE II, CLASS 3, SPEC QQ-P-416
3. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16, UNLESS OTHERWISE SPECIFIED.
4. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

FIGURE 11. CONNECTOR, LOWER FRAME.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

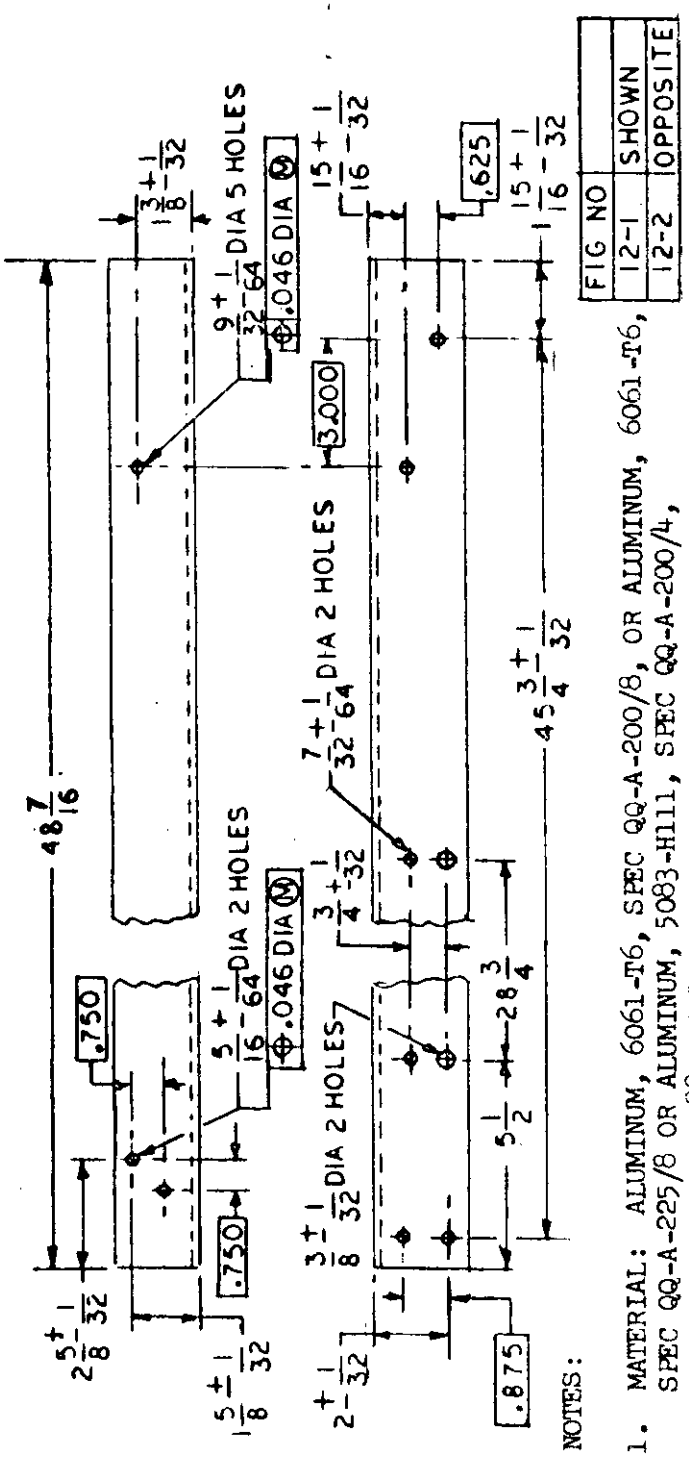


FIG NO	
12-1	SHOWN
12-2	OPPOSITE

NOTES:

1. MATERIAL: ALUMINUM, 6061-T6, SPEC QQ-A-200/8, OR ALUMINUM, 6061-T6, SPEC QQ-A-225/8 OR ALUMINUM, 5083-H111, SPEC QQ-A-200/4, 2.500 X 2.000 X .188 ANGLE
2. OPTIONAL: MATERIAL STEEL, CARBON, SPEC QQ-S-741, 2.500 X 2.000 X .125 ANGLE.
3. FINISH FOR STEEL ONLY:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490

   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR

   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK
4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.
5. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

FIGURE 12. ANGLE, FRAME SECTION.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

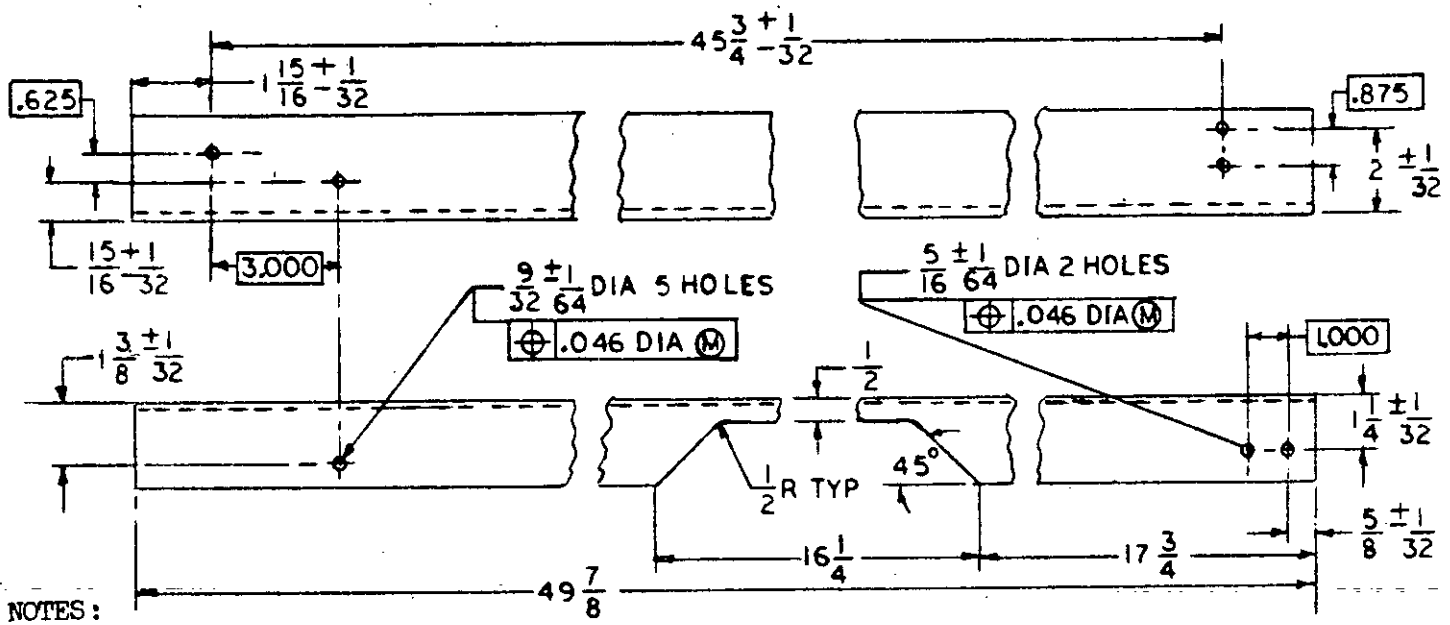


FIGURE 13. ANGLE, FRAME SECTION.

NOTES:

1. MATERIAL: ALUMINUM, 6061-T6, SPEC QQ-A-200/8, OR ALUMINUM, 6061-T61, SPEC QQ-A-225/8 OR ALUMINUM, 5083-H111, SPEC QQ-A-200/4, 2.500 X 2.000 X .188 ANGLE

2. OPTIONAL MATERIAL STEEL, CARBON, SPEC QQ-S-741, 2.500 X 2.000 X .125 ANGLE

3. FINISH FOR STEEL ONLY:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490


   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR

   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK.

4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.

5. INTERPRET DIM. AND TOL. PER USASI Y14.5 - 1966

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T06:50Z
Check the source to verify that this is the current version before use.

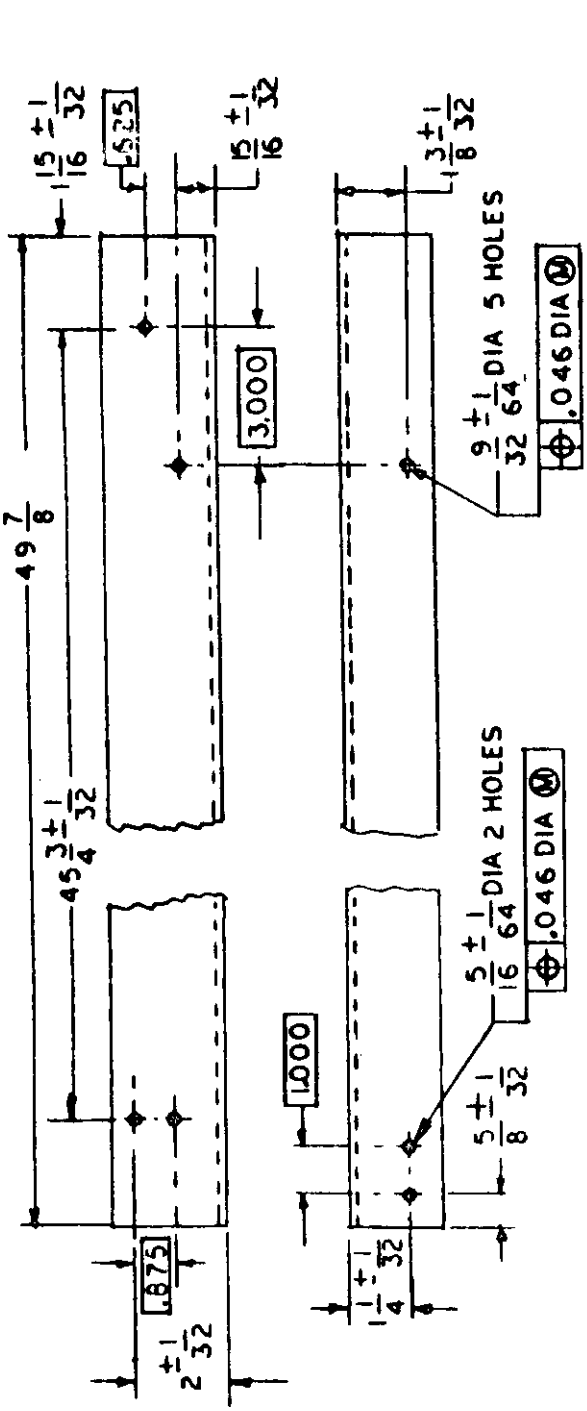

NOTES:

1. MATERIAL: ALUMINUM, 6061-T6, SPEC QQ-A-200/8, OR ALUMINUM, 6061-T6, SPEC QQ-A-225/8 OR ALUMINUM, 5083-H111, SPEC QQ-A-200/4, 2.500 X 2.000 X .188 ANGLE.
2. OPTIONAL MATERIAL STEEL, CARBON, SPEC QQ-S-741, 2.500 X 2.000 X .125 ANGLE
3. FINISH FOR STEEL ONLY:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490

   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR

   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK.
4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.
5. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966.

FIGURE 14. ANGLE, FRAME SECTION.

Source: https://assist.dla.mil -- Downloaded: 202640-22T06:50Z
Check the source to verify that this is the current version before use.

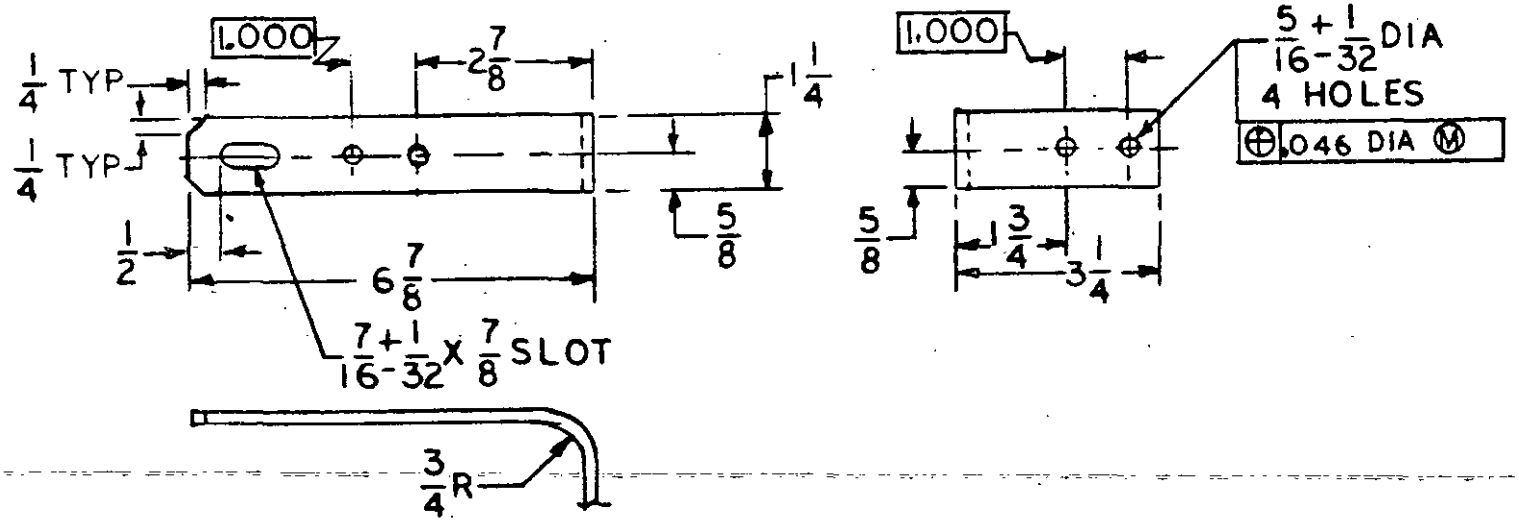


FIGURE 15. FRAME SUPPORT.

NOTES:

1. MATERIAL: CARBON STEEL, SPEC QQ-S-698, .1196 THICK SHEET OR .120 THICK STRIP.
2. FINISH:
   CAD PLATE, TYPE II, CLASS 3, SPEC QQ-P-416.
3. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16, DECIMALS _.010 UNLESS OTHERWISE SPECIFIED
4. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T06:50Z
Check the source to verify that this is the current version before use.

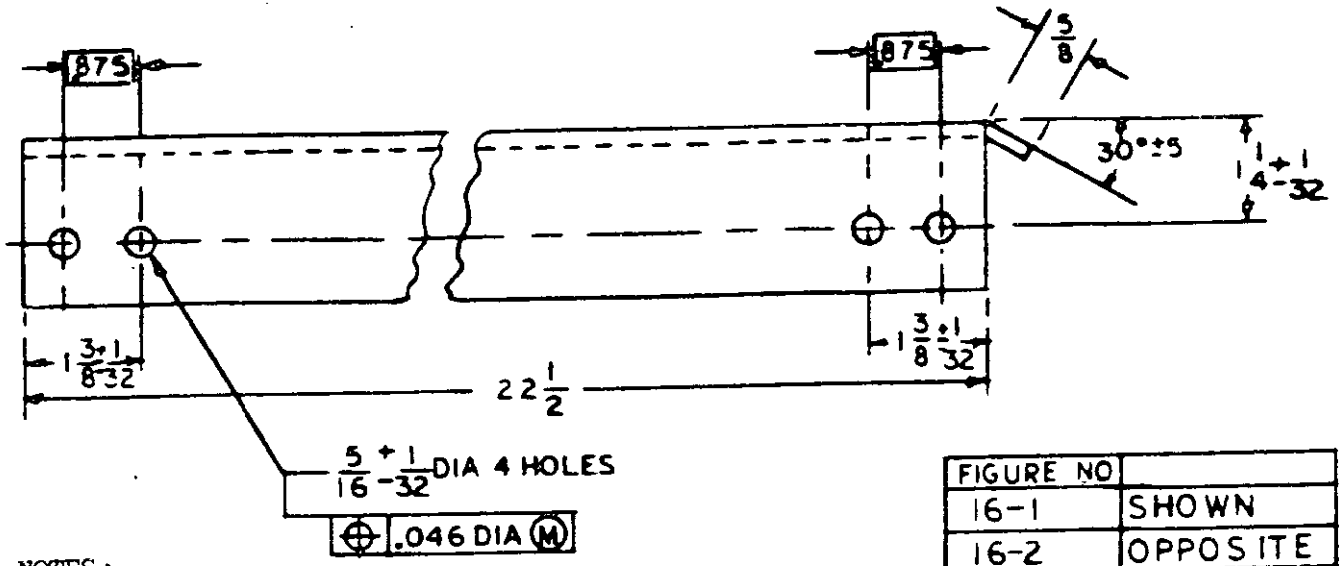


FIGURE NO	
16-1	SHOWN
16-2	OPPOSITE

NOTES:

1. MATERIAL: ALUMINUM, 6061-T6, SPEC QQ-A-200/8, OR ALUMINUM, 6061-T6, SPEC QQ-A-225/8 OR ALUMINUM, 5083-H111, SPEC QQ-A-200/4, 2.000 X 2.000 X .188 ANGLE.

2. OPTIONAL MATERIAL STEEL, CARBON, SPEC QQ-S-741, 2.500 X 2.000 X .125 ANGLE.

3. FINISH FOR STEEL ONLY:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490

   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR

   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK.

4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.

5. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

FIGURE 16. ANGLE, FRAME SECTION.

Source: https://assist.dla.mil -- Downloaded: 2026Z0-22T06:50Z
Check the source to verify that this is the current version before use.

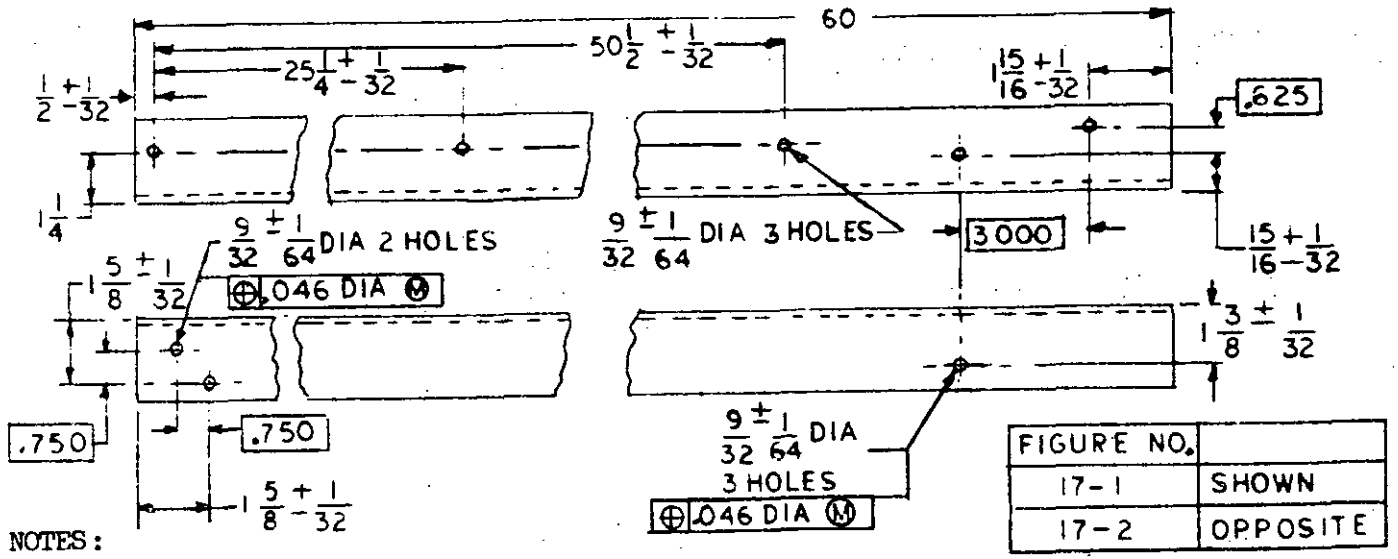


FIGURE NO.	
17-1	SHOWN
17-2	OPPOSITE

NOTES:

1. MATERIAL: ALUMINUM, 6061-T6, SPEC QQ-A-200/8, OR ALUMINUM, 6061-T6, SPEC QQ-A-225/8 OR ALUMINUM, 5083-H111, SPEC QQ-A-200/4, 2.000 X 2.000 X .188 ANGLE.

2. OPTIONAL MATERIAL: STEEL, CARBON, SPEC QQ-S-741, 2.000 X 2.000 X .125 ANGLE


3. FINISH FOR STEEL ONLY:
   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490
   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR
   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK.

4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.

5. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

FIGURE 17. ANGLE, UPPER FRAME.

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T06:50Z
Check the source to verify that this is the current version before use.

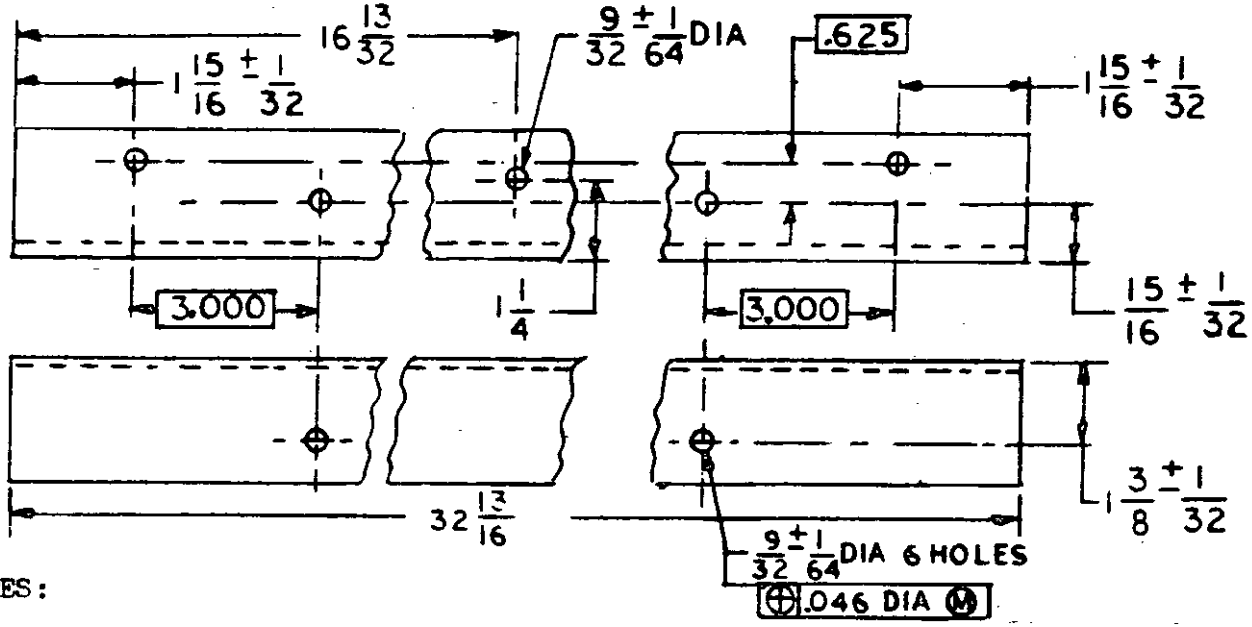

NOTES:

1. MATERIAL: ALUMINUM, 6061-T6, SPEC QQ-A-200/8, OR ALUMINUM, 6061-T6, SPEC QQ-A-225/8 OR ALUMINUM, 5083-H111, SPEC QQ-A-200/4, 2.000 X 2.000 X .188 ANGLE.

2. OPTIONAL MATERIAL STEEL, CARBON, SPEC QQ-S-741, 2.000 X 2.000 X .125 ANGLE.

3. FINISH FOR STEEL ONLY:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490

   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR


   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK

4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.

5. INTERPRET DIM. AND TOL. PER Y14.5-1966

FIGURE 18. ANGLE, UPPER FRAME.

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T06:50Z
Check the source to verify that this is the current version before use.

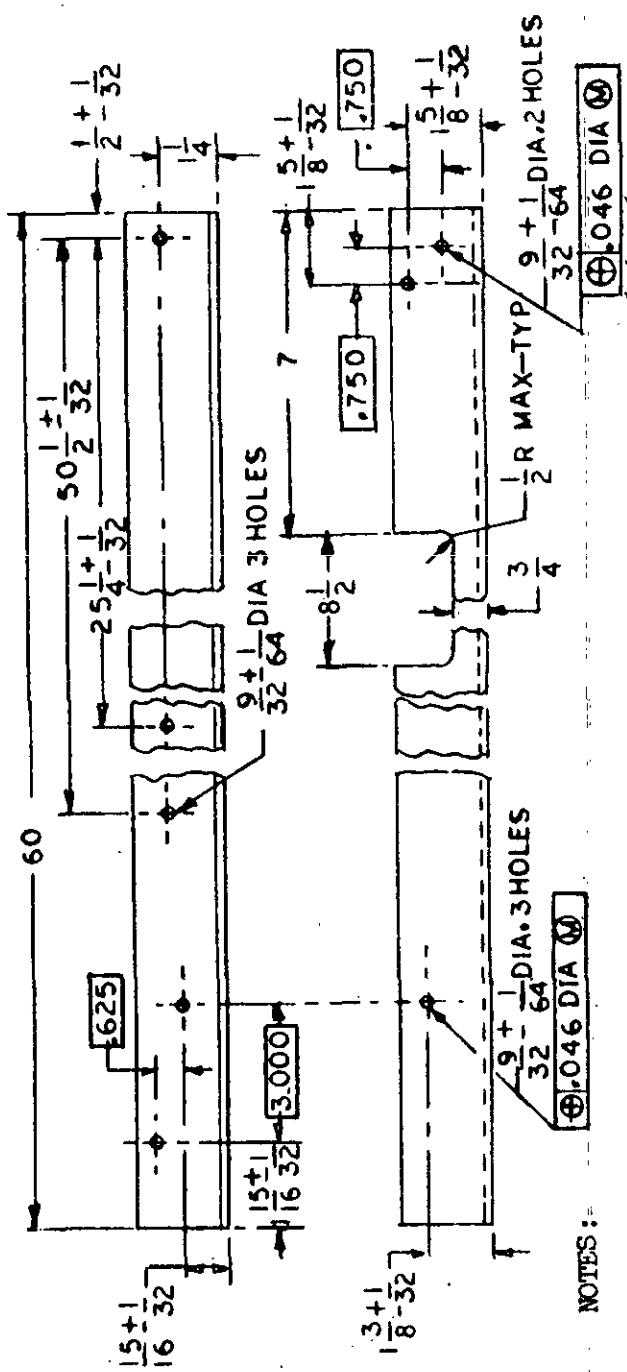


NOTES:

1. MATERIAL: ALUMINUM, 6061-T6, SPEC QQ-A-200/8, OR ALUMINUM 6061-T6, SPEC QQ-A-225/8 OR ALUMINUM, 5083-H111, SPEC QQ-A-200/4, 2.000 X 2.000 X .188 ANGLE
2. OPTIONAL MATERIAL STEEL, CARBON, SPEC QQ-S-741, 2.000 X 2.000 X .125 ANGLE.
3. FINISH FOR STEEL ONLY:
   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490.
   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK.
4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.
5. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

FIGURE 19. ANGLE, UPPER FRAME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

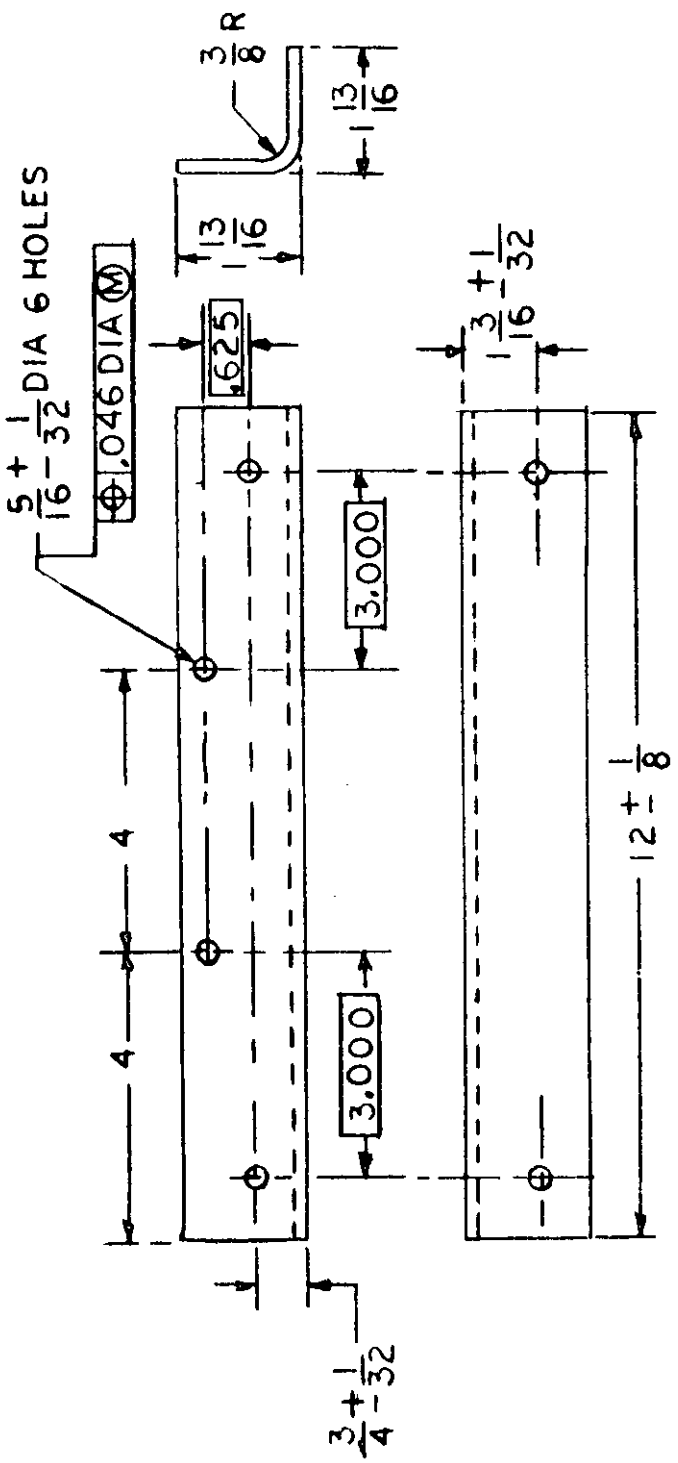

NOTES:

1. MATERIAL: CARBON STEEL, SPEC QQ-S-698, .1196 THICK SHEET OR .120 THICK STRIP.
2. FINISH:
   CAD PLATE, TYPE II, CLASS 3, SPEC QQ-P-416.
3. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16, UNLESS OTHERWISE SPECIFIED.
4. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

FIGURE 20. CONNECTOR, FRAME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

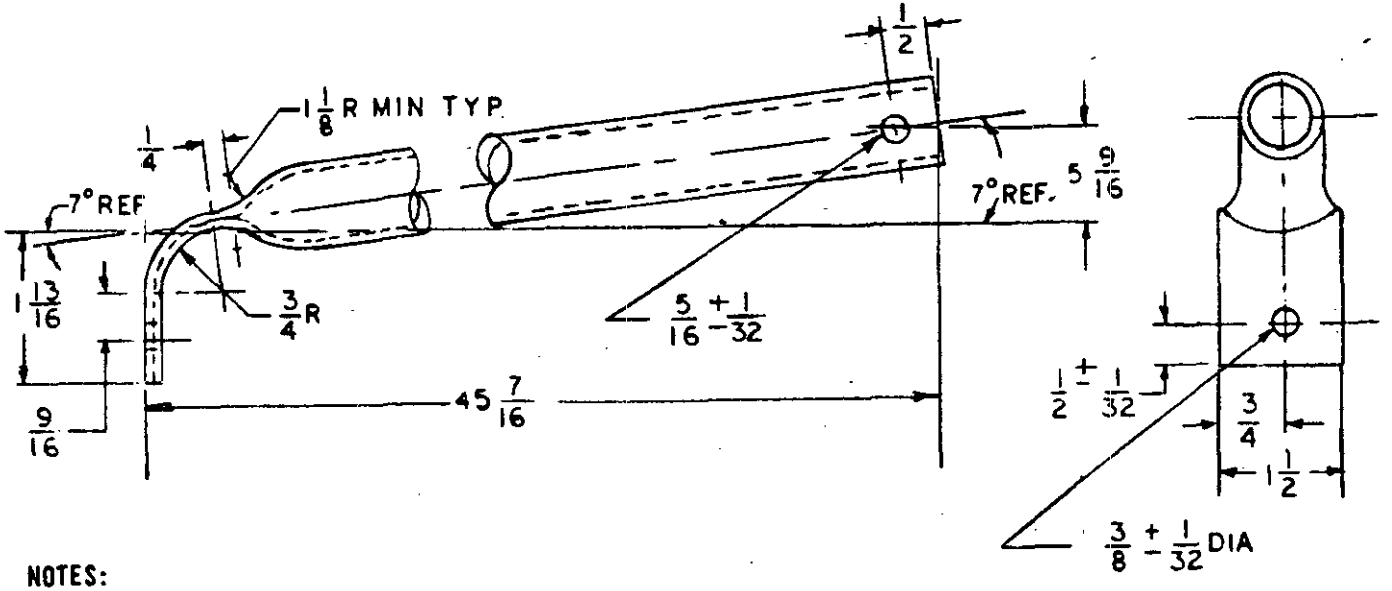


FIGURE 21. TUBE, METAL.

NOTES:

1. MATERIAL: TUBE ALUMINUM, 5086-O, , TYPE I, SPEC WW-T-700/5 OR TUBE ALUMINUM, 6061-O,, SPEC WW-T-700/6, 1.000 OD X .120 WALL
2. OPTIONAL MATERIAL: TUBE STEEL, CARBON, TYPE OPT, MT 1010 TO MTX 1020, COSR-RD, SPEC QQ-T-830, 1.000 OD X .065 WALL
3. FINISH FOR STEEL ONLY:
   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490
   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR
   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK.
4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.
5. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T06:50Z
Check the source to verify that this is the current version before use.

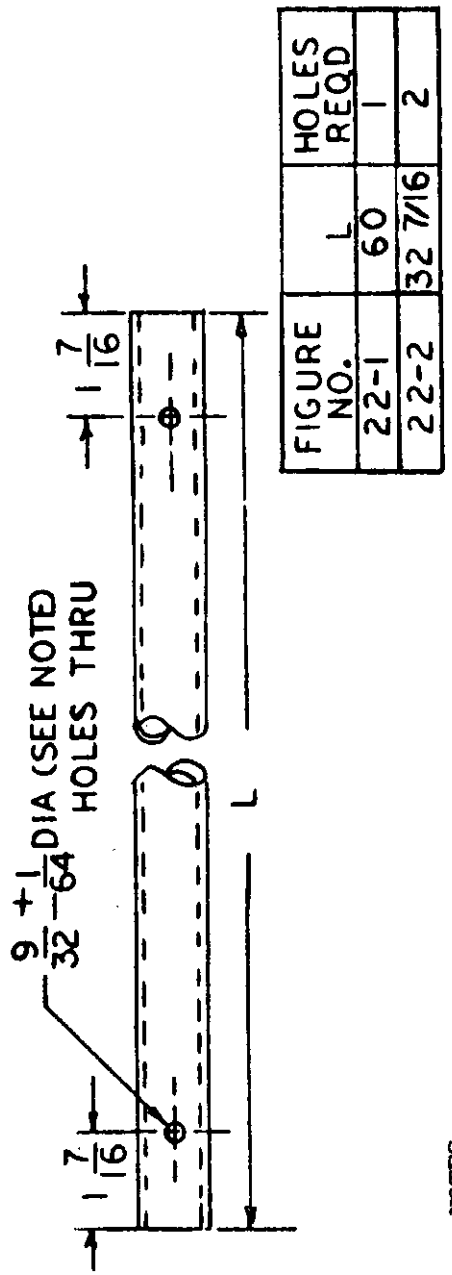


FIGURE NO.	L	HOLES REQD
22-1	60	1
22-2	32 7/16	2

NOTES:

1. MATERIAL: TUBE, ALUMINUM, 5086-H32, TYPE I, SPEC WW-T-700/5 OR TUBE, ALUMINUM, 6061-T6, TYPE I, SPEC WW-T-700/6, .785 I.D. X .120 WALL
2. OPTIONAL MATERIAL: TUBE, STEEL, CARBON MT1010 THRU MTX1020, COND OPT, RD SPEC QQ-T-830, 1.000 OD X .065 WALL
3. DIM. IN INCHES, TOL. ±1/16 UNLESS OTHERWISE SPECIFIED.
4. INTERPRET DIM. AND TOL. PER USASI Y14.5 - 1966

FIGURE 22. TUBE, CENTER TOP.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

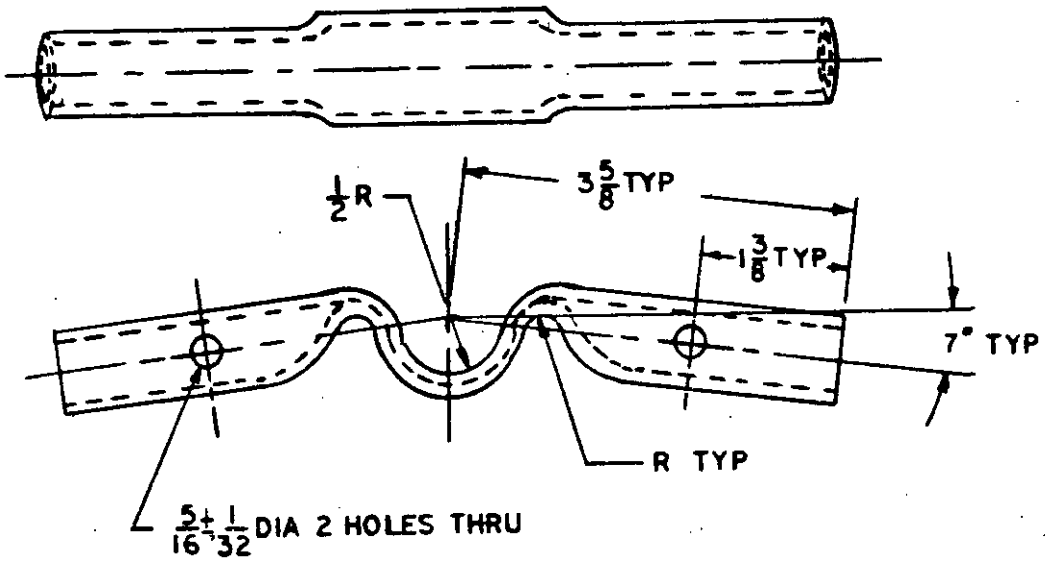


FIGURE 23. CONNECTOR TUBE.

NOTES:


1. MATERIAL: TUBE ALUMINUM, 5086-0, TYPE I, SPEC WW-T-700/5 OR
   TUBE ALUMINUM, 5052-0, TYPE I, SPEC WW-T-700/4 OR
   TUBE ALUMINUM, 5083-0, TYPE I, SPEC QQ-A-200/4
   .750 OD X .095 WALL

2. OPTIONAL MATERIAL: TUBE STEEL, CARBON, SEAMLESS, MT 1010 TO
   MTX 1020, TYPE OPTIONAL, CDSR-RD, SPEC QQ-T-830,
   .812 OD X .065 WALL

3. DIM. IN INCHES, TOL. ON FRACTIONS $\pm$1/16 UNLESS OTHERWISE SPECIFIED

4. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

Source: https://assist.dla.mil -- Downloaded: 2026/0-22T06:50Z
Check the source to verify that this is the current version before use.

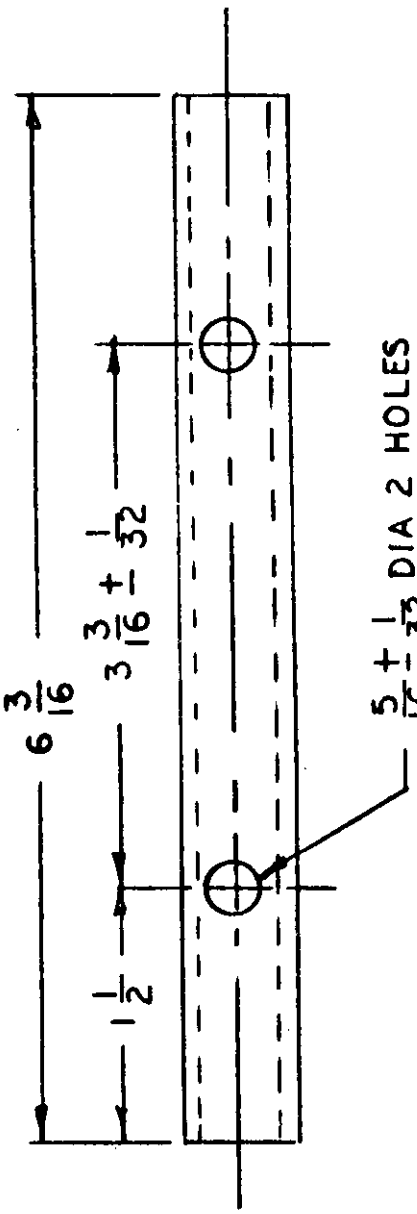

NOTES:

1. MATERIAL: TUBE ALUMINUM 5086-H32, TYPE I, SPEC WW-T-700/5 OR TUBE ALUMINUM 6061-T6, TYPE I, SPEC WW-T-700/6
   .750 OD X .120 WALL
2. OPTIONAL MATERIAL: STEEL CARBON TUBING, MT 1010-MTX 1020 TYPE OPT., CD-RD, SPEC QQ-T-830,
   .812 OD X .187
3. FINISH FOR STEEL ONLY
   CADMIUM PLATE TYPE II, CLASS 3, SPEC QQ-P-416
4. DIM. IN INCHES, TOL ±1/16 UNLESS OTHERWISE SPECIFIED
5. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

FIGURE 24. CONNECTOR, TUBE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

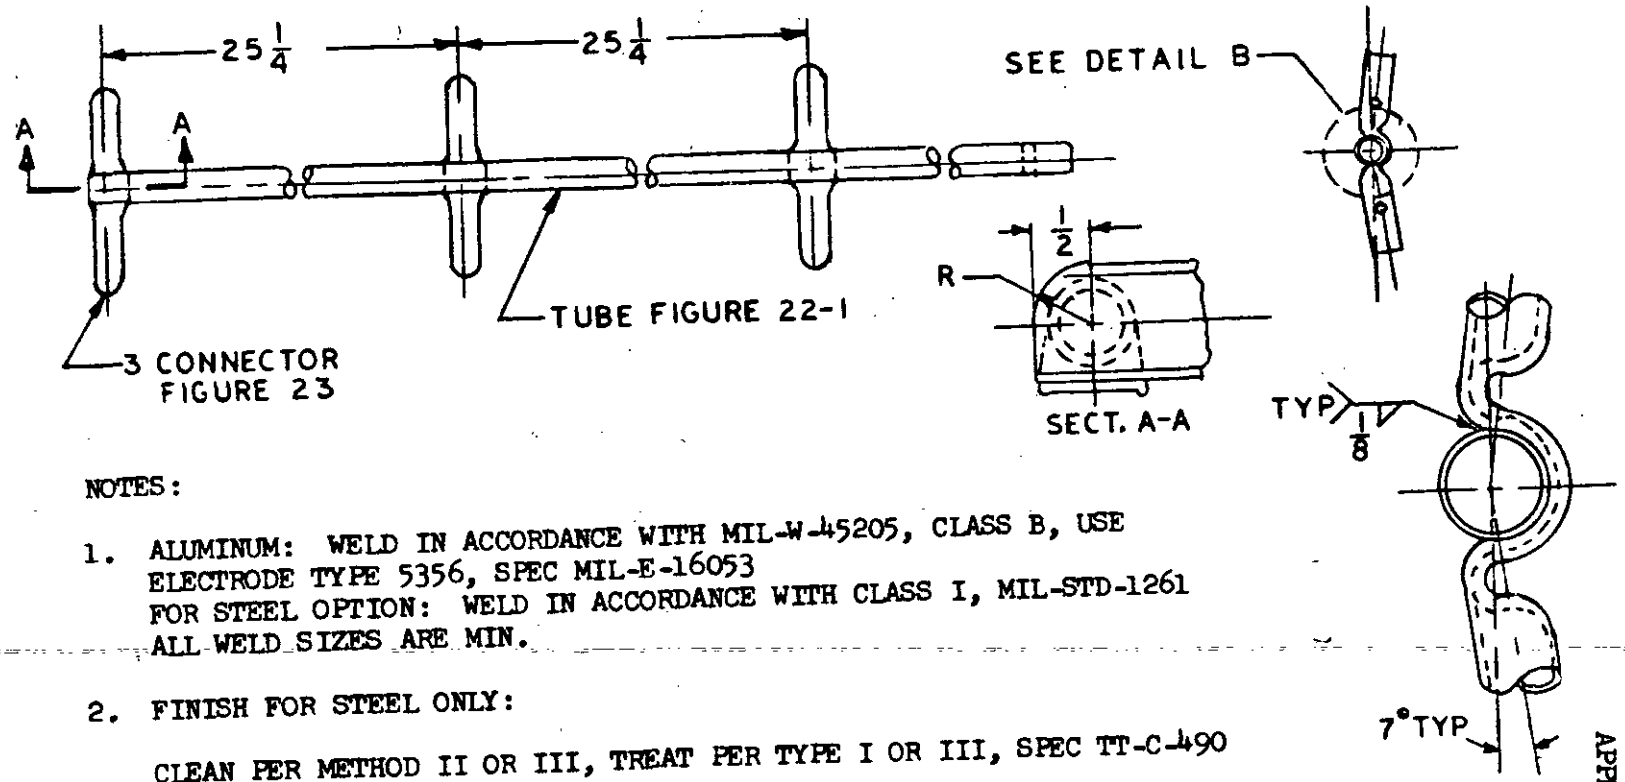


FIGURE 25. Tubing section, end top.

NOTES:

1. ALUMINUM: WELD IN ACCORDANCE WITH MIL-W-45205, CLASS B, USE ELECTRODE TYPE 5356, SPEC MIL-E-16053
   FOR STEEL OPTION: WELD IN ACCORDANCE WITH CLASS I, MIL-STD-1261
   ALL WELD SIZES ARE MIN.

2. FINISH FOR STEEL ONLY:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490

   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR

   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK

3. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED

4. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

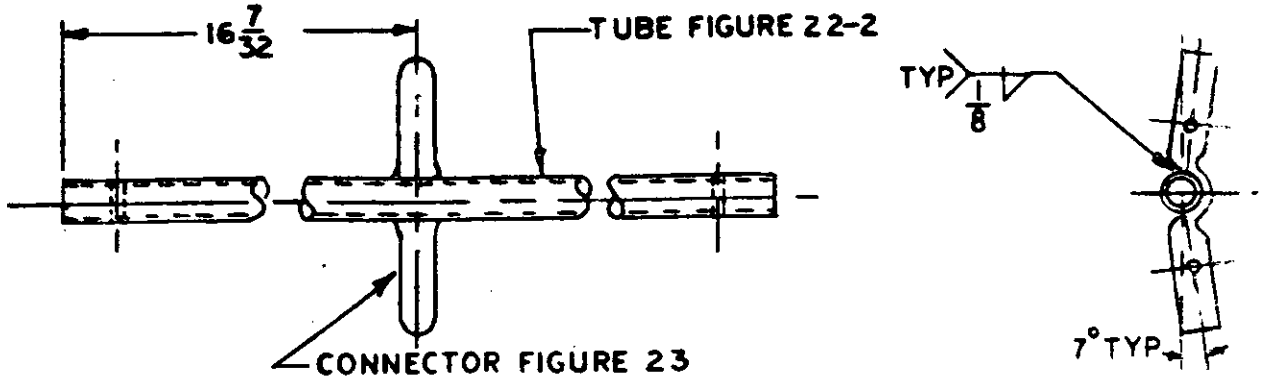


FIGURE 26. TUBING SECTION, CENTER TOP.

NOTES:

1. ALUMINUM: WELD IN ACCORDANCE WITH MIL-W-45205, CLASS B, USE ELECTRODE TYPE 5356, SPEC MIL-E-16053
   FOR STEEL OPTION: WELD IN ACCORDANCE WITH CLASS I, MIL-STD-1261
   ALL WELD SIZES ARE MIN.

2. FINISH FOR STEEL ONLY:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490


   APPLY PRIMER, SPEC TT-P-636, 9.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR

   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK

3. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.

4. INTERPRET DIM. AND TOL. PER USASI Y14.5 - 1966

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

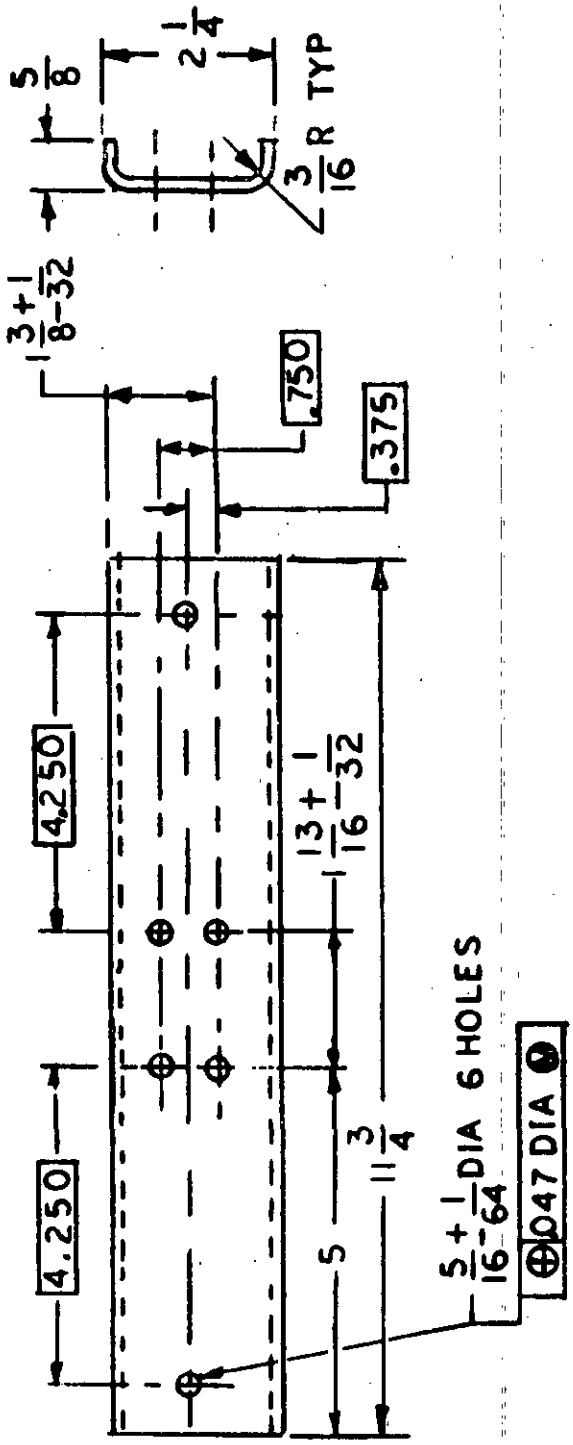

NOTES:

1. MATERIAL: CARBON STEEL, SPEC QQ-S-698, .1196 THICK SHEET OR .120 THICK STRIP.
2. FINISH:
   CAD PLATE, TYPE II, CLASS 3, SPEC QQ-P-416.
3. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16, UNLESS OTHERWISE SPECIFIED
4. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

FIGURE 27. CONNECTOR, LOWER FRAME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

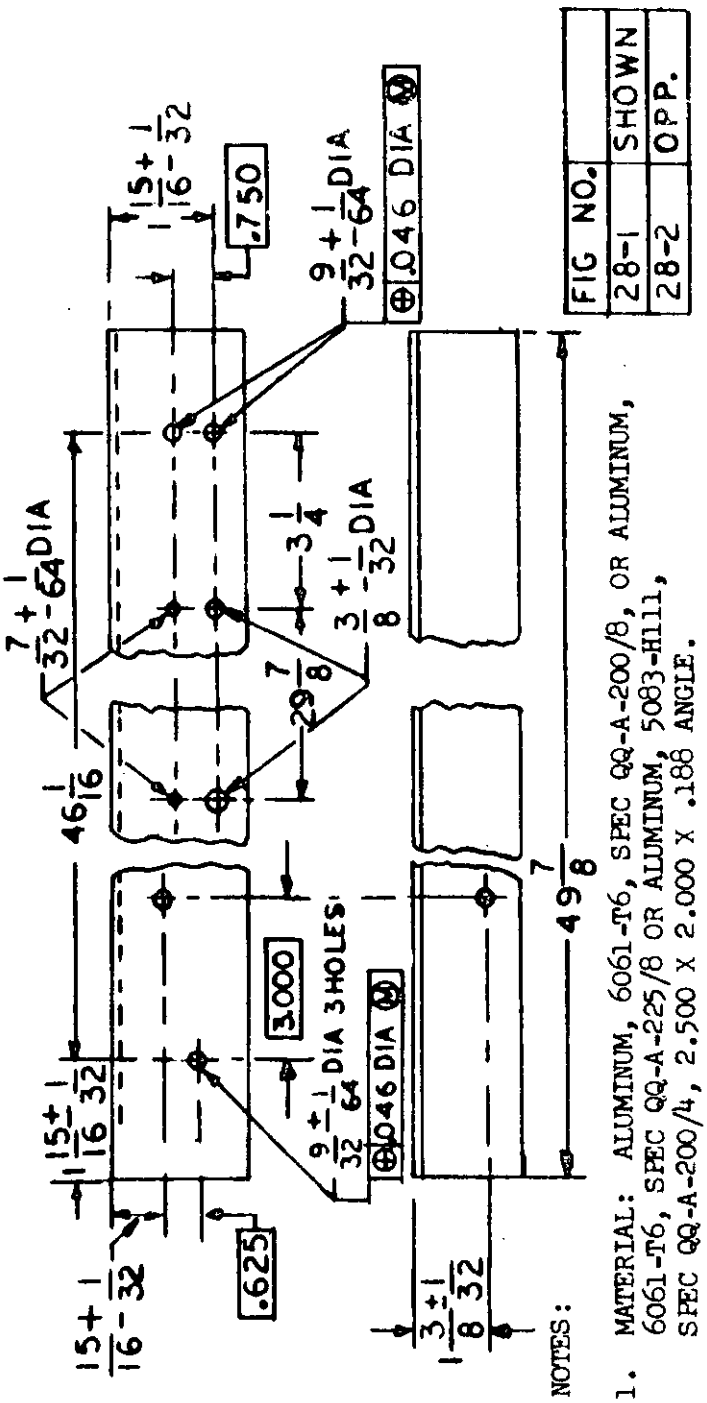


FIG NO.	
28-1	SHOWN
28-2	OPP.

NOTES:

1. MATERIAL: ALUMINUM, 6061-T6, SPEC QQ-A-200/8, OR ALUMINUM, 6061-T6, SPEC QQ-A-225/8 OR ALUMINUM, 5083-H111, SPEC QQ-A-200/4, 2.500 X 2.000 X .188 ANGLE.
2. OPTIONAL MATERIAL: STEEL, CARBON, SPEC QQ-S-741, 2.500 X 2.000 X .125 ANGLE.
3. FINISH FOR STEEL ONLY:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490

   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 TO 1.75 MILS THK OR

   APPLY ENAMEL, OLIVE DRAB, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK
4. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.
5. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966

FIGURE 28. ANGLE, LOWER FRONT.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

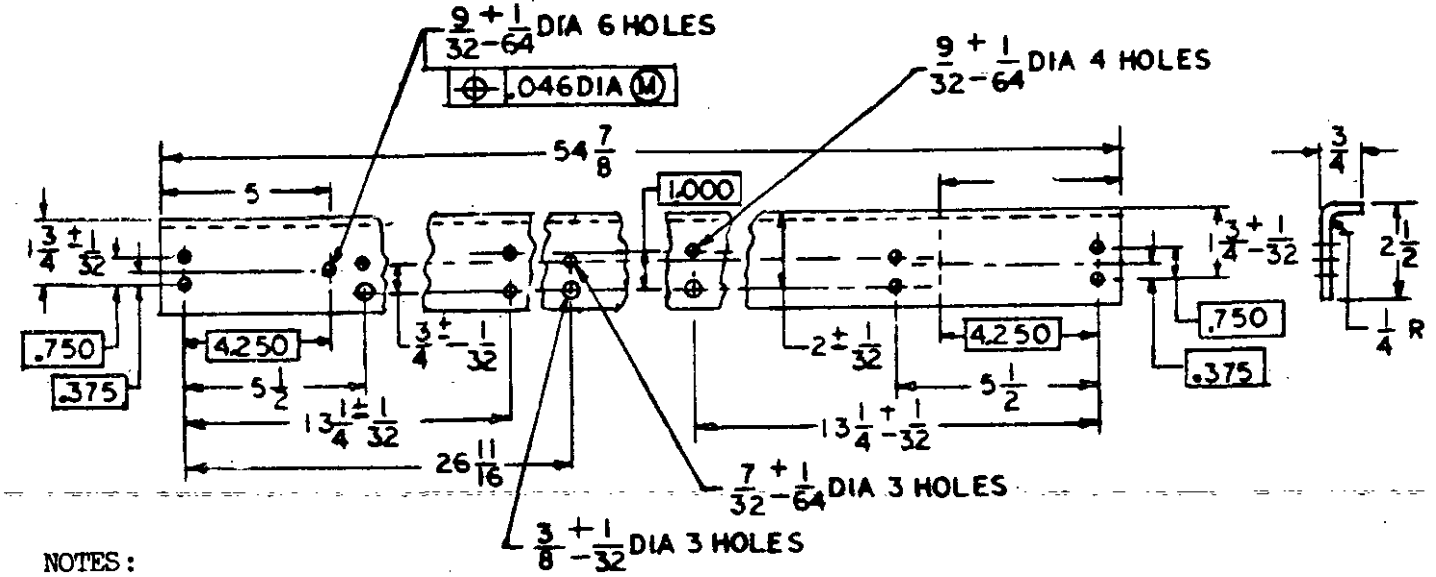


FIGURE 29. ANGLE, LOWER FRAME.

NOTES:

1. MATERIAL: CARBON STEEL, SPEC QQ-S-698, .1345 THICK SHEET OR .134 THICK STRIP.

2. FINISH:

   CLEAN PER METHOD II OR III, TREAT PER TYPE I OR III, SPEC TT-C-490


   APPLY PRIMER, SPEC TT-P-636, 0.75 TO 1.25 MILS THK AND APPLY ENAMEL, OLIVE DRAB, CL A, COMP OPT, SPEC TT-E-529, 1.25 MILS THK OR

   APPLY ENAMEL, OLIVE, TYPE OPT, COMP OPT, SPEC TT-E-485, 2.00 TO 2.50 MILS THK

3. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED.

4. INTERPRET DIM. AND TOL. PER USASI Y14.5-1966


Source: https://assist.dla.mil - Downloaded: 2026Q-22T06:50Z
Check the source to verify that this is the current version before use.

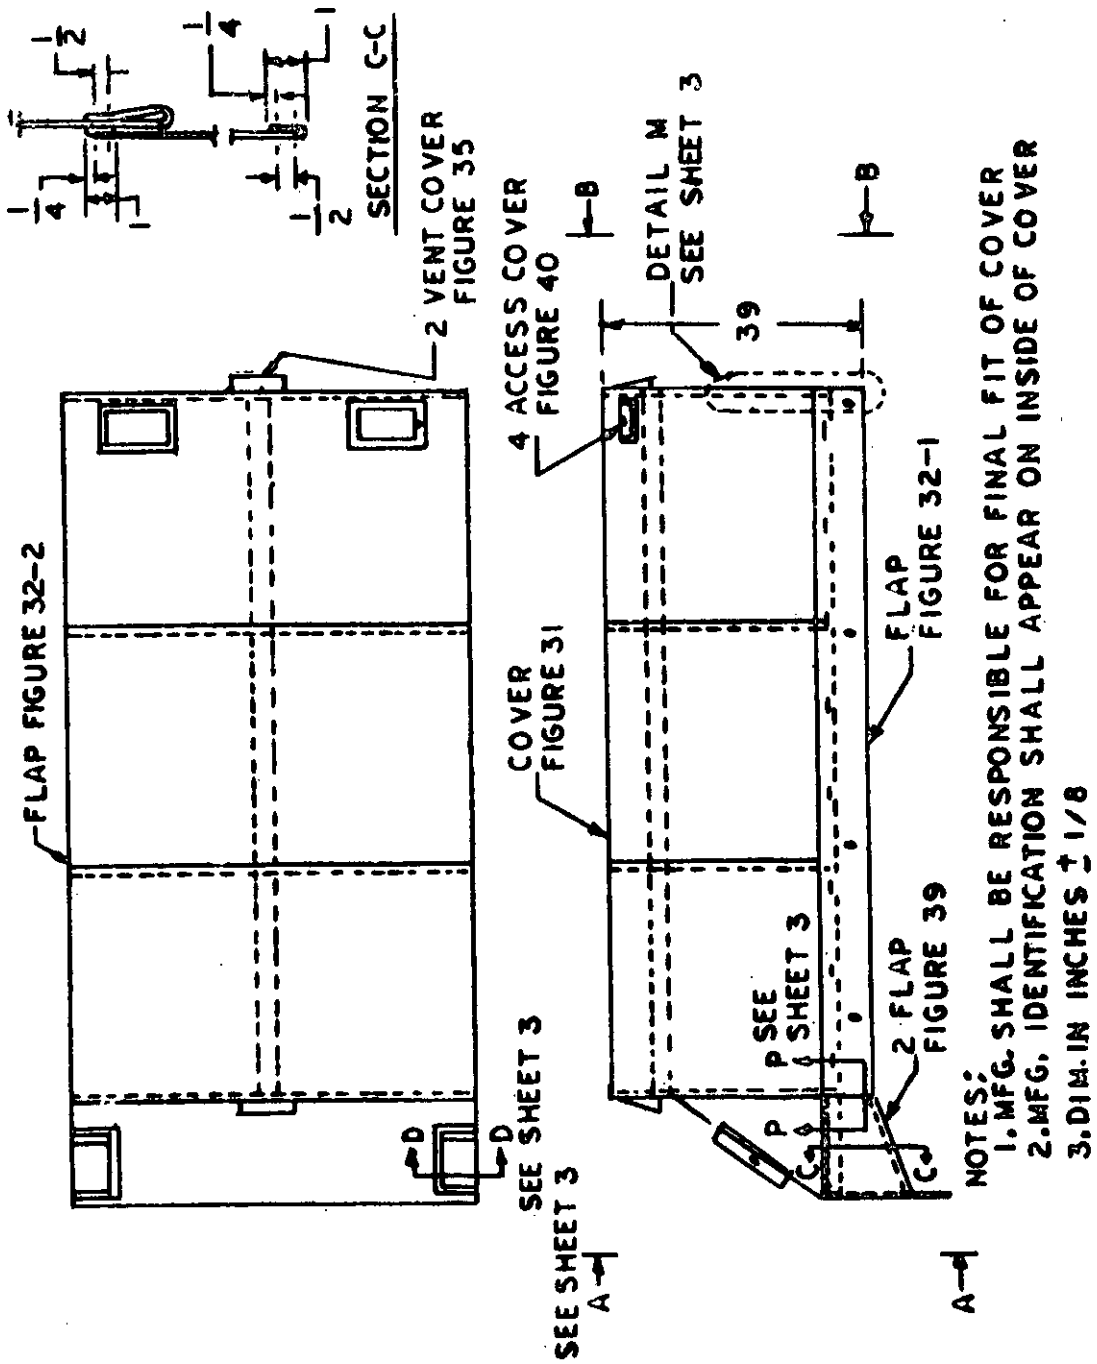



SHEET 1 OF 3


FIGURE 30. COVER, VEHICLE CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

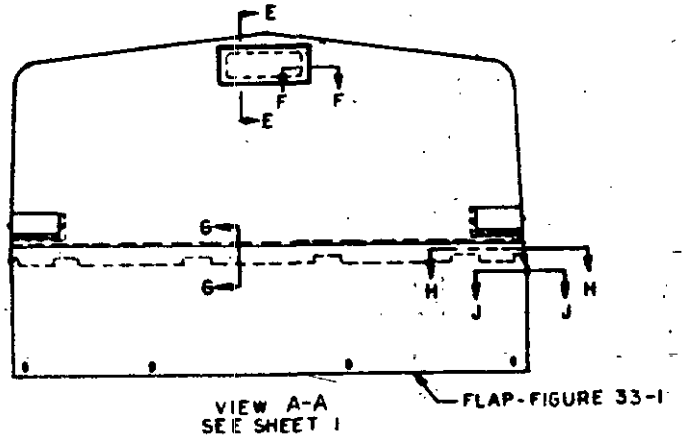


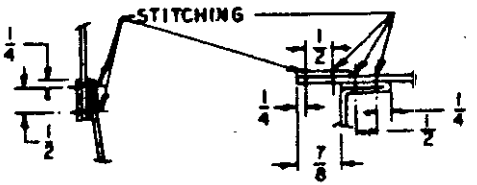





DO NOT SEW FLAP TO COVER IN CORNERS WITH VERTICAL STITCHING

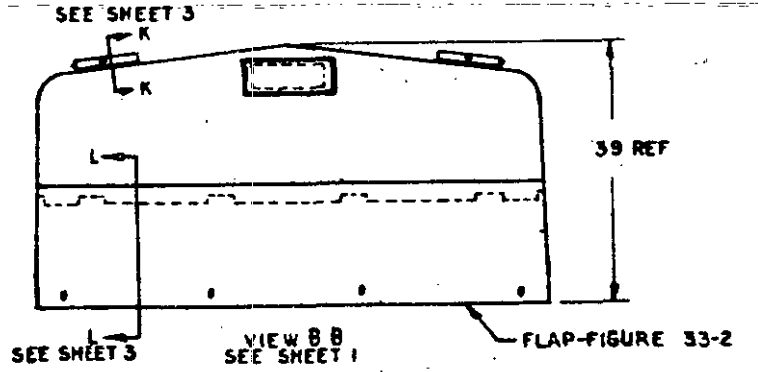





FIGURE 30. Cover, vehicle closure.

SHEET 2 OF 3

STITCHING NOTE
STITCHES, TYPE 301, FED-STD-751, 8 TO 10 STITCHES PER INCH, SMALLEST NEEDLE SIZE FEASIBLE SHOULD BE USED IN ORDER TO ASSURE WEATHER PROOF SEAMS. THREAD, NYLON, TYPE II, CLASS I, SIZE F, COLOR O.D., NO X 24087, F S 595, SPEC V-T-295
DIM. & TOL. PER MIL-STD-8
DIM. IN INCHES TOL. ±1/8


Source: https://assist.dla.mil -- Downloaded: 2026-02-22T06:50Z
Check the source to verify that this is the current version before use.

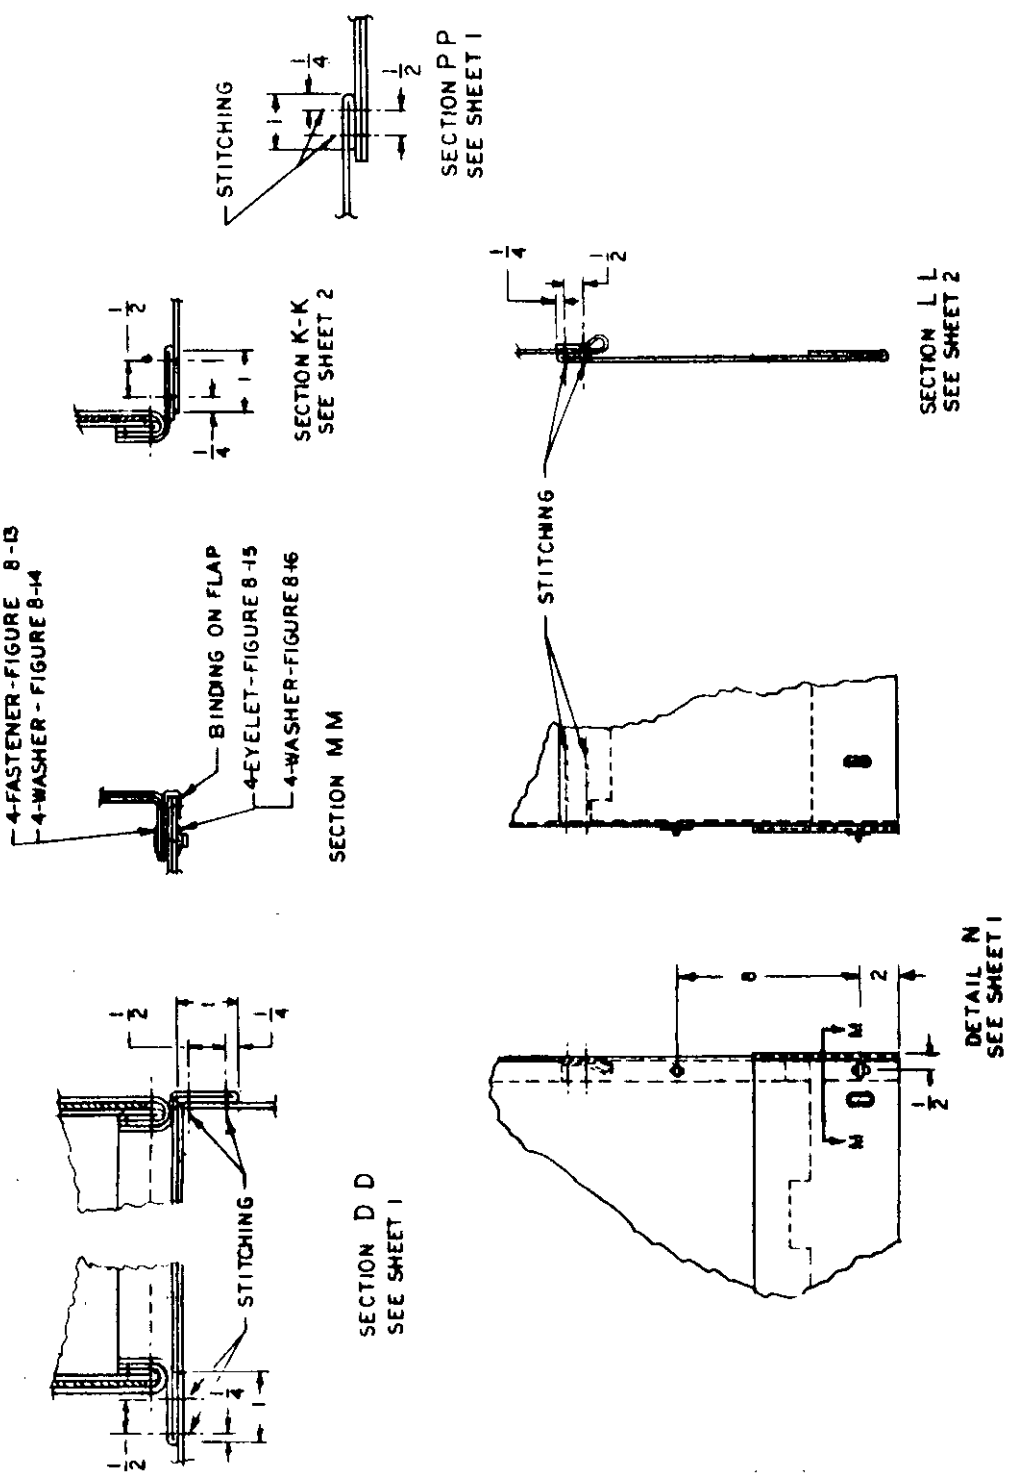

SHEET 3 OF 3

FIGURE 30. COVER, VEHICLE CLOSURE KIT.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

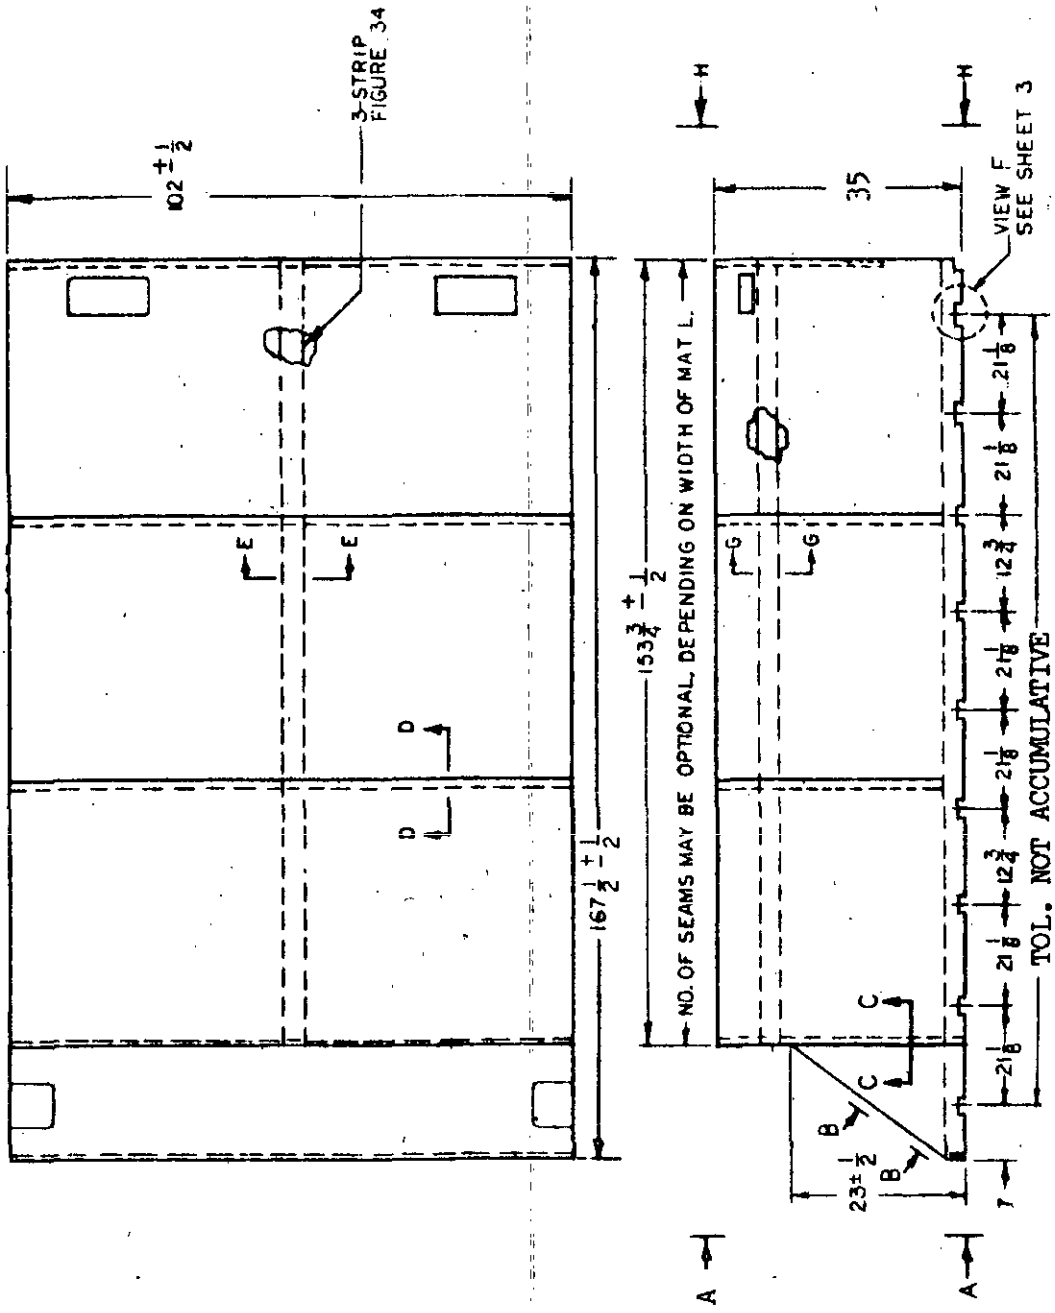


SHEET 1 OF 4

FIGURE 31. COVER, VEHICLE CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

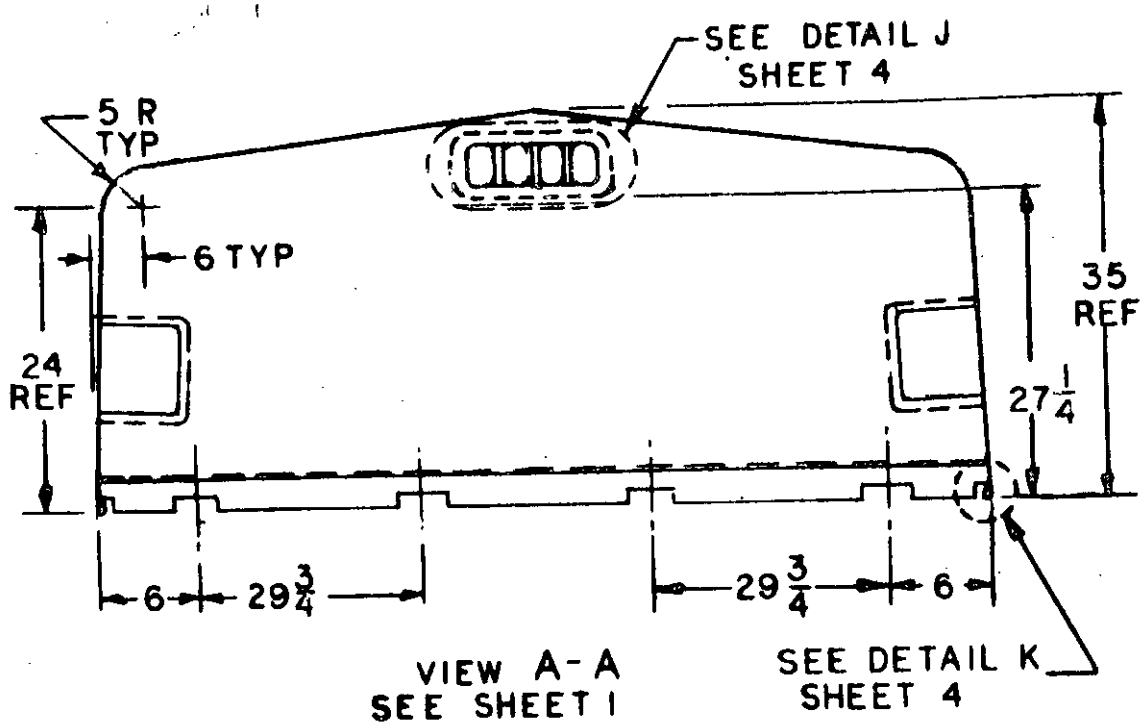


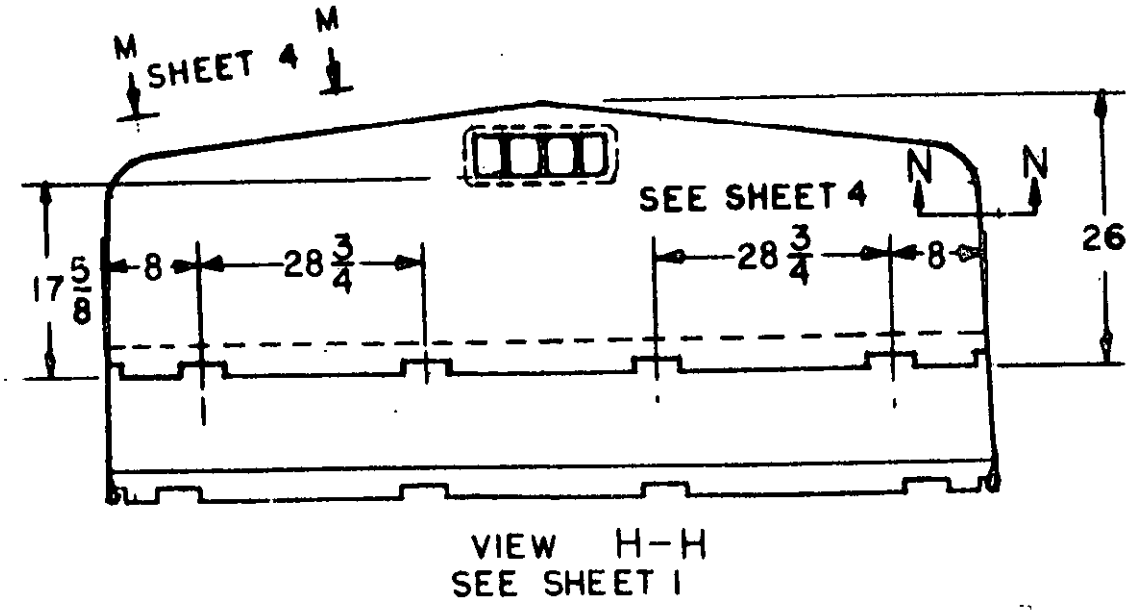


SHEET 2 OF 4

FIGURE 31. COVER, VEHICLE CLOSURE.


Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

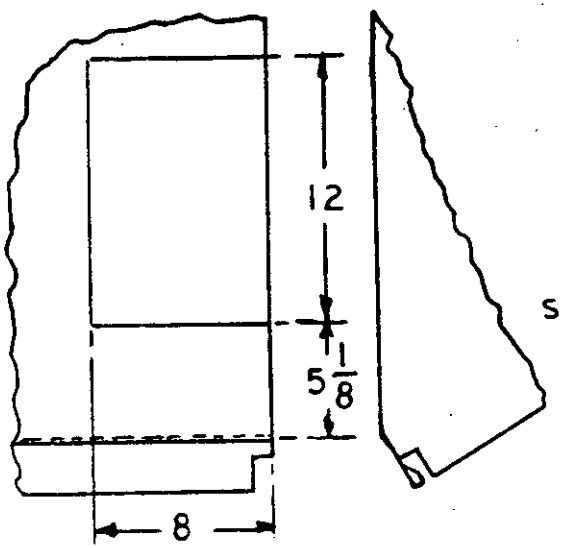


VIEW BB
SEE SHEET 1
2 PLACES

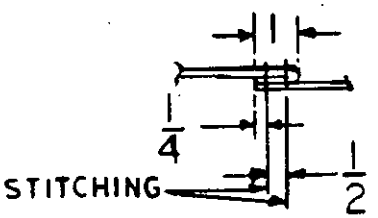


SECTION D-D
SEE SHEET 1

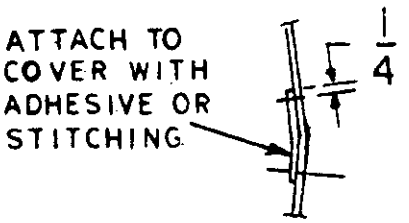


SECTION E-E
SEE SHEET 1

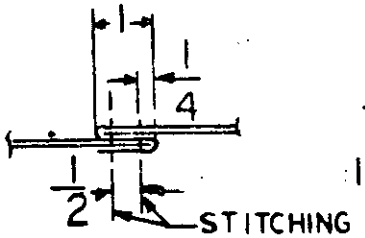

SECTION C-C
NOTE: SEAM AT THIS LOCATION OPTIONAL

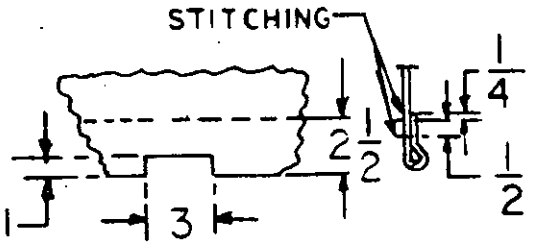


VIEW F
26 PLACES
SEE SHEET 1

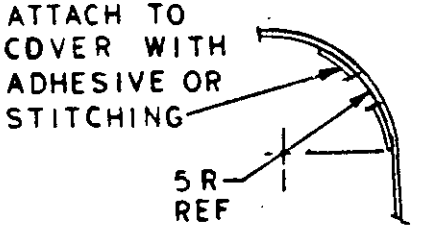

SECTION G-G
SEE SHEET 1

FIGURE 31. COVER, VEHICLE CLOSURE, SHEET 3 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T06:50Z
Check the source to verify that this is the current version before use.

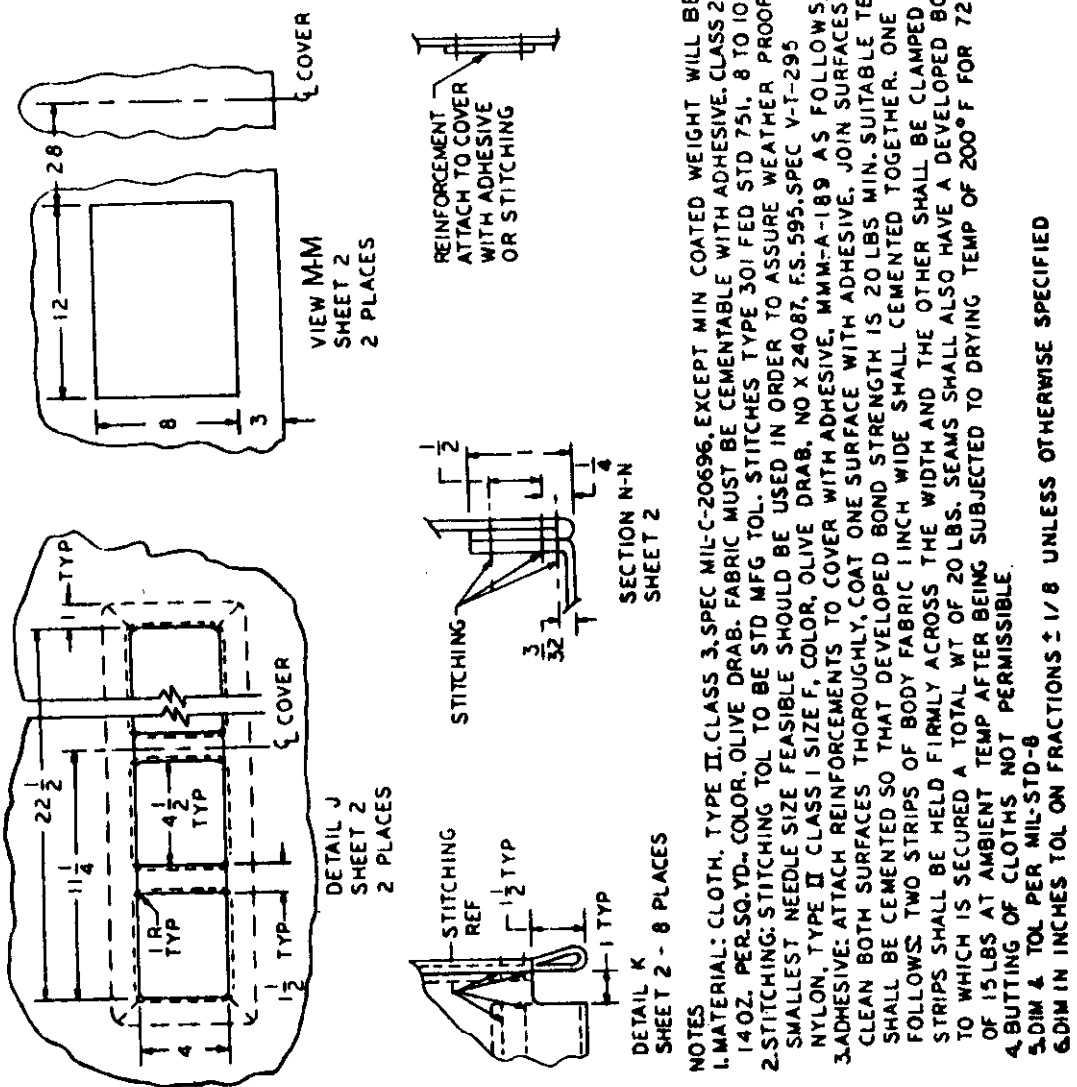

NOTES
1. MATERIAL: CLOTH, TYPE II, CLASS 3, SPEC MIL-C-20696, EXCEPT MIN COATED WEIGHT WILL BE 14 OZ. PER SQ. YD., COLOR, OLIVE DRAB. FABRIC MUST BE CEMENTABLE WITH ADHESIVE. CLASS 2, SPEC MMM-A-189
2. STITCHING: STITCHING TOL TO BE STD MFG TOL. STITCHES TYPE 301 FED STD 751, 8 TO 10 STITCHES PER IN. SMALLEST NEEDLE SIZE FEASIBLE SHOULD BE USED IN ORDER TO ASSURE WEATHER PROOF SEAMS. THREAD. NYLON, TYPE II CLASS 1 SIZE F, COLOR, OLIVE DRAB, NO X 24087, F.S. 595, SPEC V-T-295
3. ADHESIVE: ATTACH REINFORCEMENTS TO COVER WITH ADHESIVE, MMM-A-189 AS FOLLOWS, CLEAN BOTH SURFACES THOROUGHLY, COAT ONE SURFACE WITH ADHESIVE, JOIN SURFACES FIRMLY. SEAMS SHALL BE CEMENTED SO THAT DEVELOPED BOND STRENGTH IS 20 LBS MIN. SUITABLE TEST PROCEDURE FOLLOWS: TWO STRIPS OF BODY FABRIC 1 INCH WIDE SHALL CEMENTED TOGETHER. ONE OF THE TWO STRIPS SHALL BE HELD FIRMLY ACROSS THE WIDTH AND THE OTHER SHALL BE CLAMPED WITH A DEVICE TO WHICH IS SECURED A TOTAL WT OF 20 LBS. SEAMS SHALL ALSO HAVE A DEVELOPED BOND STRENGTH OF 15 LBS AT AMBIENT TEMP AFTER BEING SUBJECTED TO DRYING TEMP OF 200°F FOR 72 HOURS
4. BUTTING OF CLOTHS NOT PERMISSIBLE
5. DIM ± TOL PER MIL-STD-8
6. DIM IN INCHES TOL ON FRACTIONS ± 1/8 UNLESS OTHERWISE SPECIFIED

SHEET 4 OF 4

FIGURE 31. COVER, VEHICLE CLOSURE.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

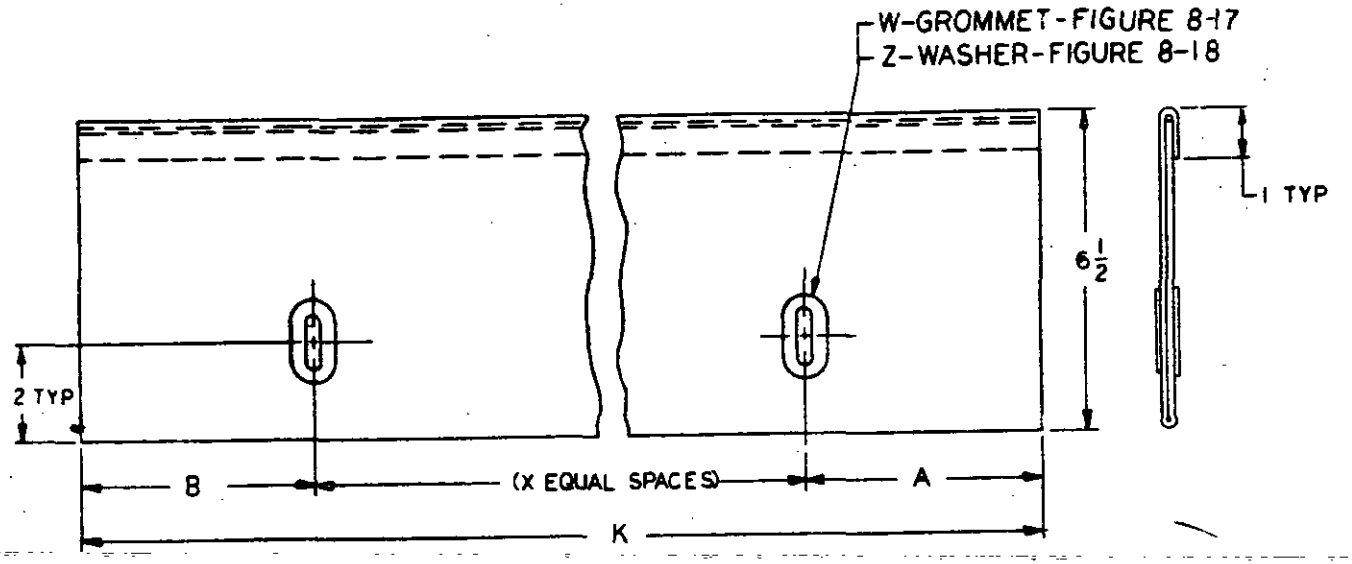


FIGURE 32. FLAP COVER.

FIG. NO.	X SPACES	W-GROMMET REQUIRED	Z-WASHER REQUIRED	LENGTH K	LENGTH A	LENGTH B	
32-1	4	5	5	154 1/4	2	3	SHOWN
32-2	4	5	5	154 1/4	3	2	OPPOSITE

MATERIAL NOTE:
CLOTH, TYPE II, CLASS 3, SPEC MIL-C-20696, EXCEPT
MIN. COATED, WEIGHT WILL BE 14 OZ. PER SQ. YD., COLOR OLIVE DRAB
FABRIC MUST BE CEMENTABLE WITH ADHESIVE MMM-A-189.

DIM IN INCHES TOL ON FRACTIONS ±1/4 UNLESS OTHERWISE SPECIFIED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

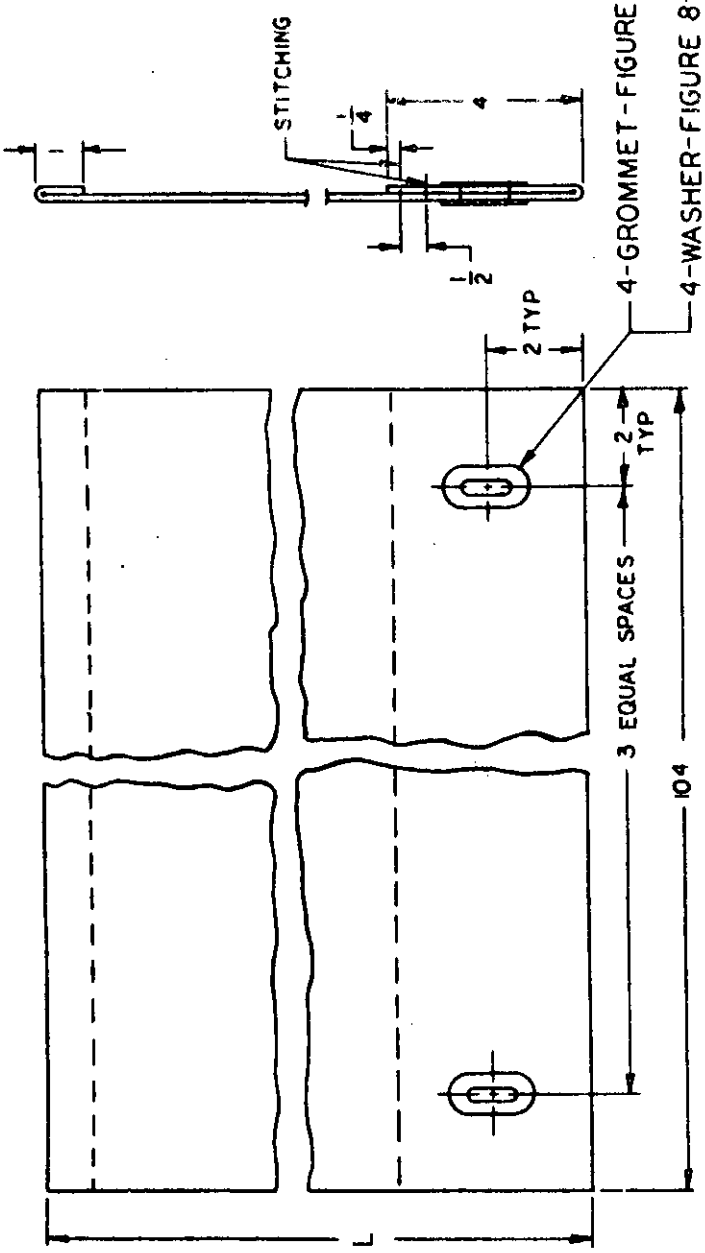


FIG. NO.	LENGTH L
33-1	21
33-2	16


MATERIAL NOTE:
CLOTH, TYPE II, CLASS 3, SPEC MIL-C-20696, EXCEPT
MIN. COATED, WEIGHT WILL BE 14 OZ. PER SQ. YD, COLOR OLIVE DRAB
THREAD, NYLON, TYPE II, CLASS 1, SIZE F, COLOR OLIVE DRAB NO. X 24087 F.S.595 SPEC V-T-295

STITCHING NOTE:
STITCHING, TYPE 301, FED STD 751, 8 TO 10 STITCHES PER INCH, SMALLEST NEEDLE SIZE FEASIBLE SHOULD BE USED IN ORDER TO ASSURE WEATHER PROOF SEAMS

DIM. INCHES TOL FRACTIONS ±1/8 UNLESS OTHERWISE SPECIFIED

FIGURE 33. FLAP COVER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

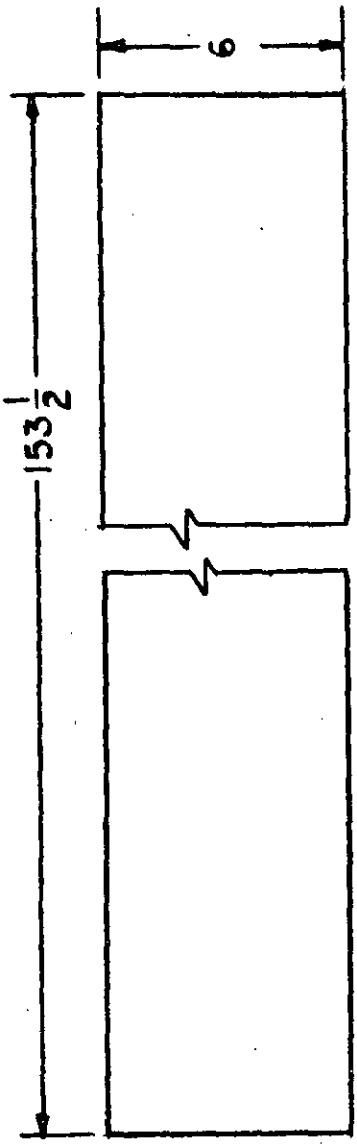

MATERIAL NOTE
CLOTH TYPE II, CLASS 3, SPEC MIL-C-20696 EXCEPT
MIN. COATED WEIGHT WILL BE 14 OZ. PER SQ.YD., COLOR, OLIVE DRAB
FABRIC MUST BE CEMENTABLE WITH ADHESIVE MMM-A-189

DIM IN INCHES TOL ±1/4
UNLESS OTHERWISE SPECIFIED

FIGURE 34. REINFORCING STRIP.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.


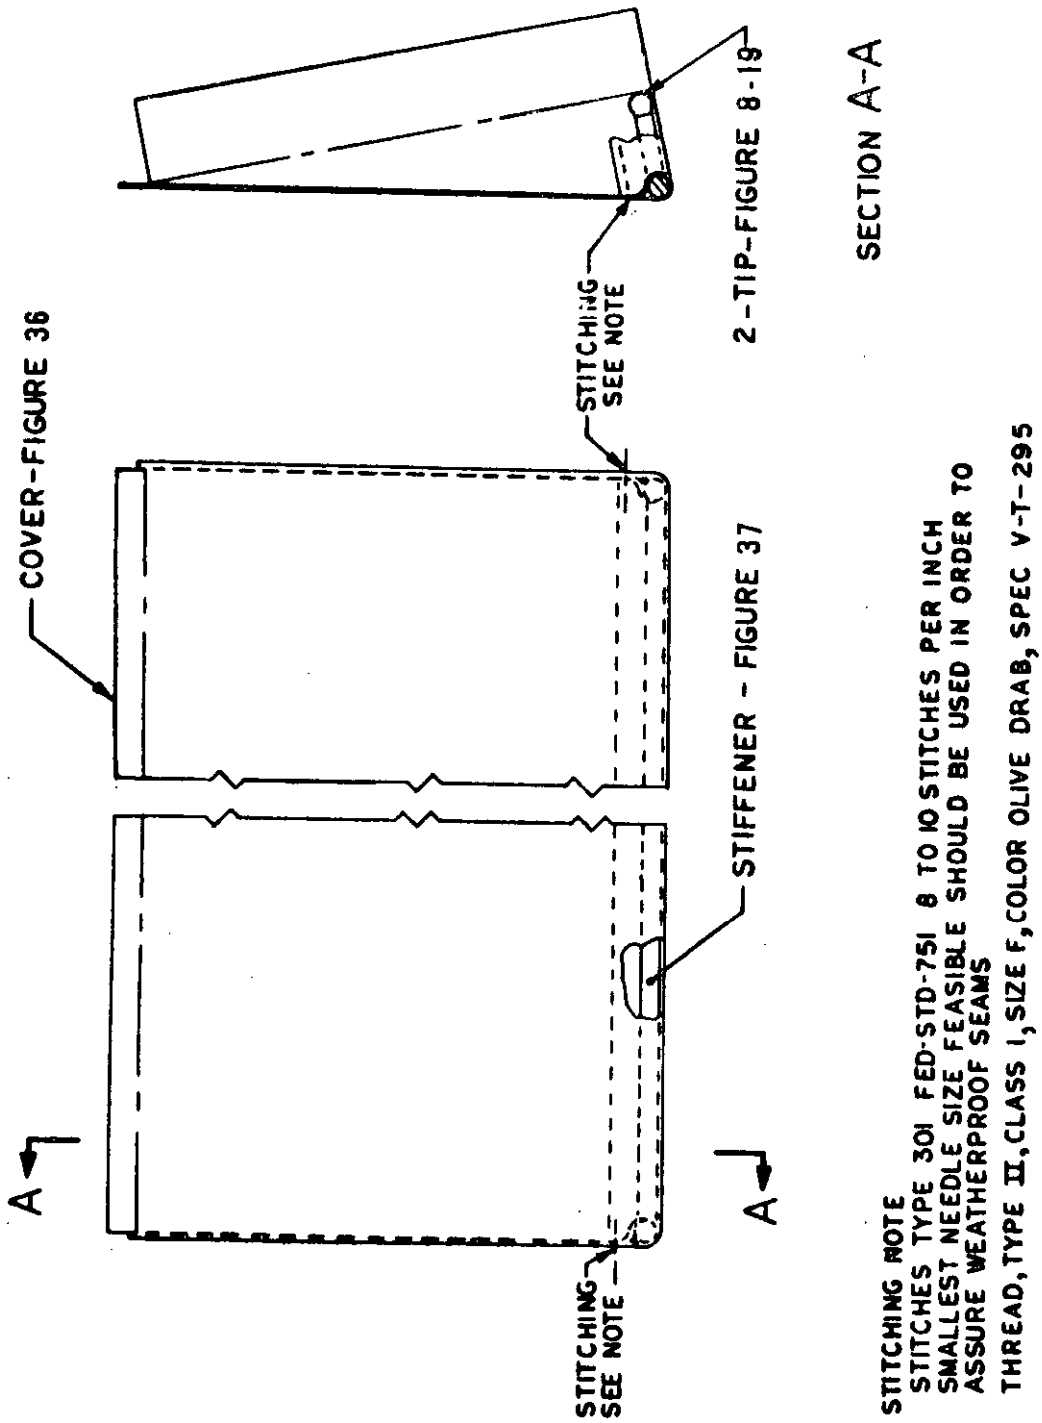


FIGURE 35. VENT COVER.


Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

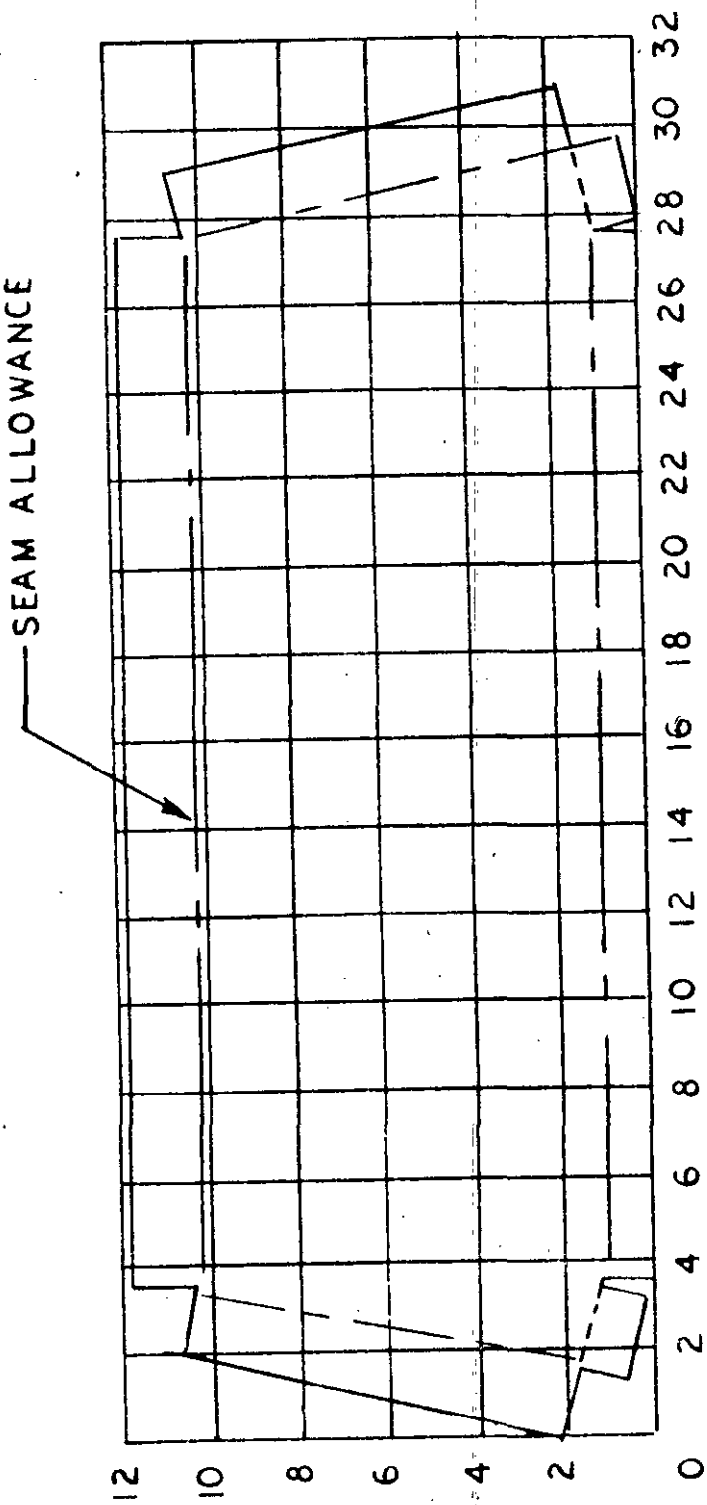

MATERIAL NOTE
CLOTH TYPE II, CLASS 3, SPEC MIL-C-20696 EXCEPT MIN COATED WEIGHT WILL BE 14 OZ PER SQ YD COLOR OLIVE DRAB FABRIC MUST BE CEMENTABLE WITH ADHESIVE MMM-A-189

FIGURE 36. COVER, VENT.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

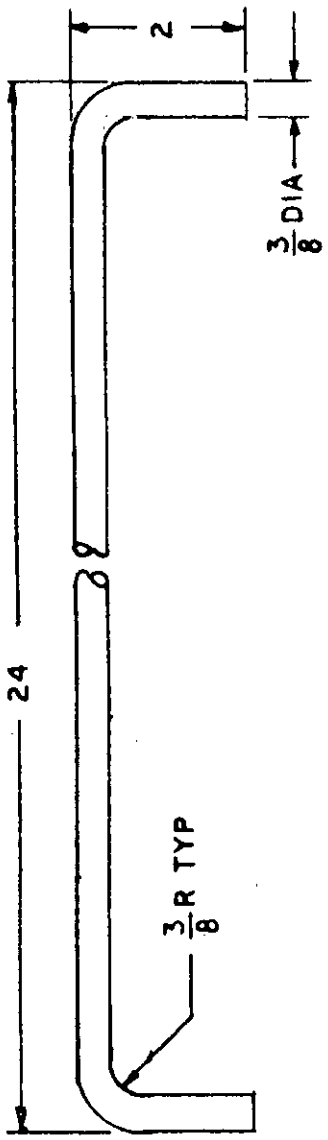


NOTES:

1. MATERIAL: STEEL, CARBON, C1010 THRU C1020, SPEC QQ-S-634
2. FINISH:
   CAD PLATE, TYPE II, CLASS 3, SPEC QQ-P-416
3. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16, UNLESS OTHERWISE SPECIFIED
4. INTERPRET DIM. AND TOL. PER USASI Y14.5 - 1966

FIGURE 37. STIFFENER, VENT COVER.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

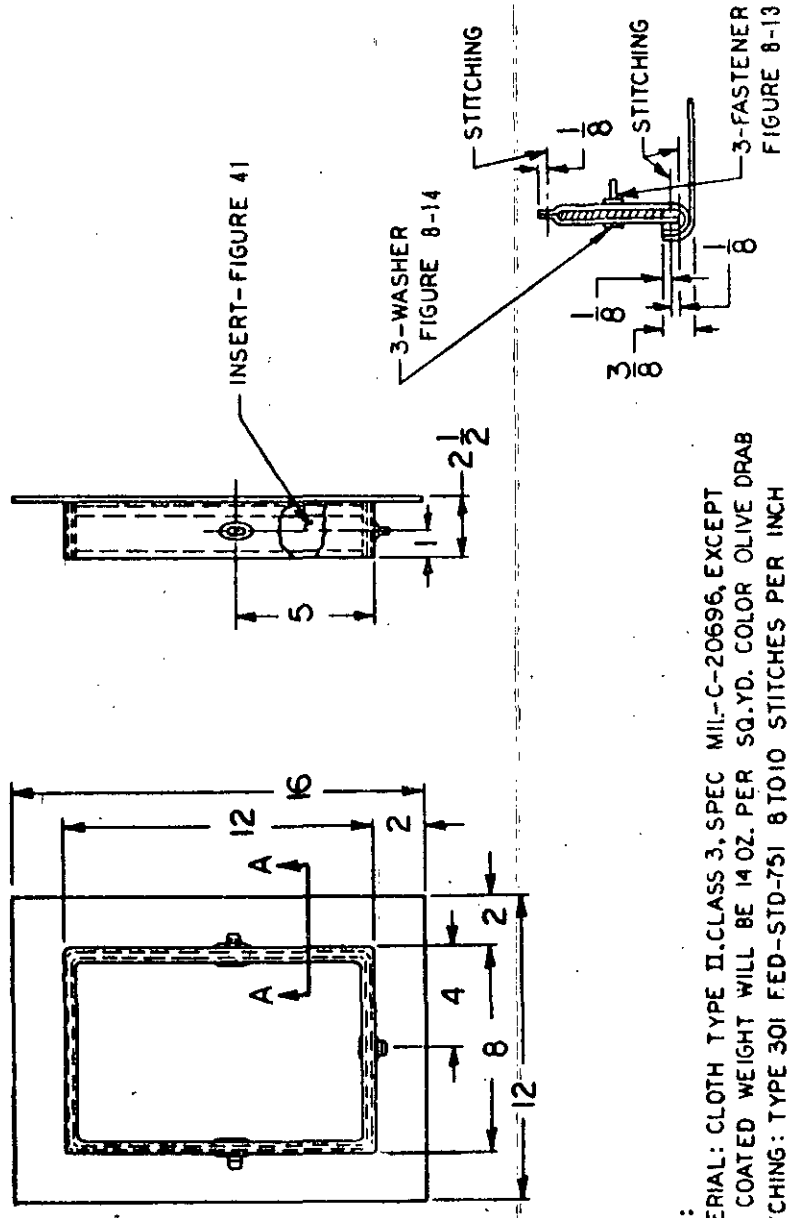

NOTES:
MATERIAL: CLOTH TYPE II, CLASS 3, SPEC MIL-C-20696, EXCEPT MIN. COATED WEIGHT WILL BE 14 OZ. PER SQ.YD. COLOR OLIVE DRAB
STITCHING: TYPE 301 FED-STD-751 8 TO 10 STITCHES PER INCH SMALLEST NEEDLE SIZE FEASIBLE SHOULD BE USED IN ORDER TO ASSURE WEATHER PROOF SEAMS
THREAD: NYLON TYPE II, CLASS 1, SIZE F, COLOR OLIVE DRAB, NO. X24087, F.S.595, SPEC V-T-295
DIM. & TOL. PER MIL-STD-8
DIM. IN INCHES TOL ± 1/8 UNLESS OTHERWISE SPECIFIED

FIGURE 38. ACCESS OPENING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

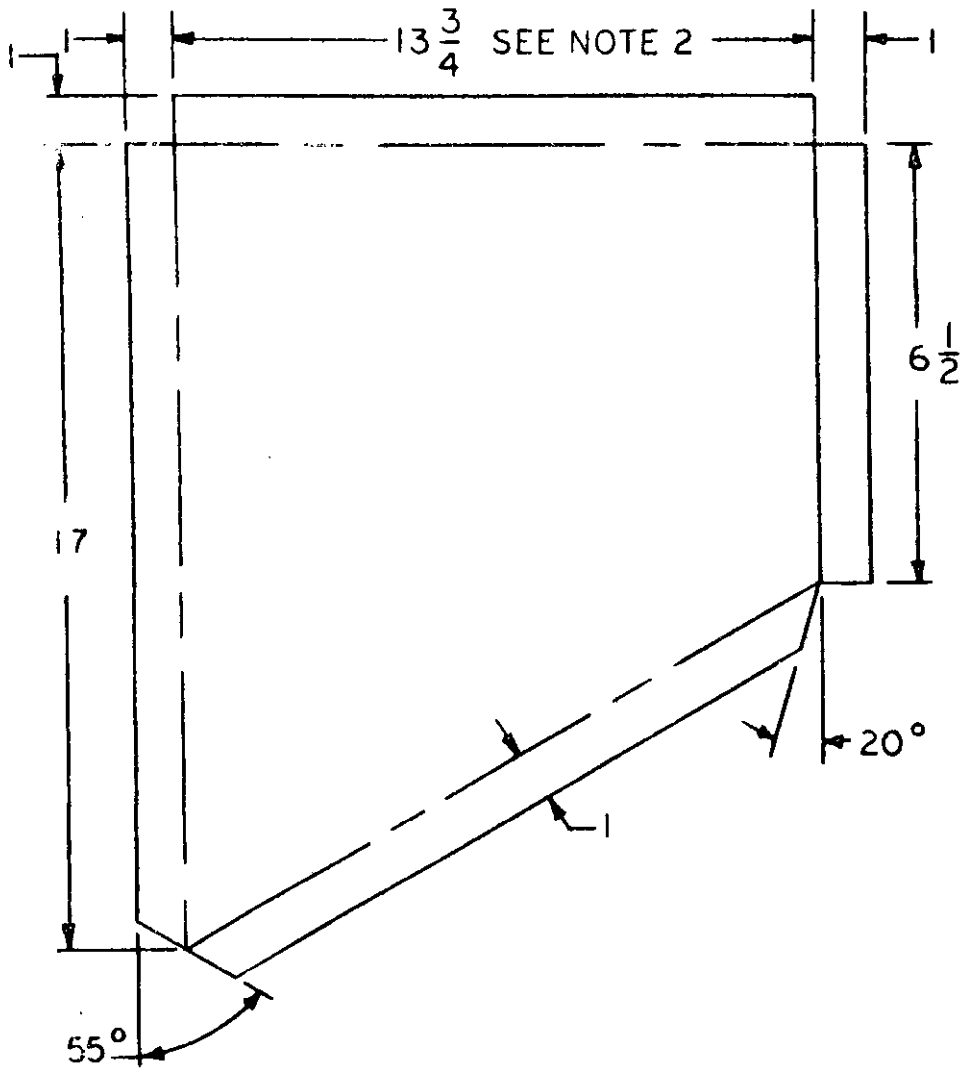

NOTES:
1. MATERIAL: CLOTH, TYPE II, CLASS 3, SPEC MIL-C-20696 EXCEPT MIN COATED WEIGHT WILL BE 14 OZ PER SQ YD. COLOR OLIVE DRAB
2. NOMINAL DIM.-ACTUAL DIM. TO BE DETERMINED AT ASSEMBLY
3. DIM IN INCHES TOL ON FRACTIONS ±1/8

FIGURE 39. FLAP EXTENSION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

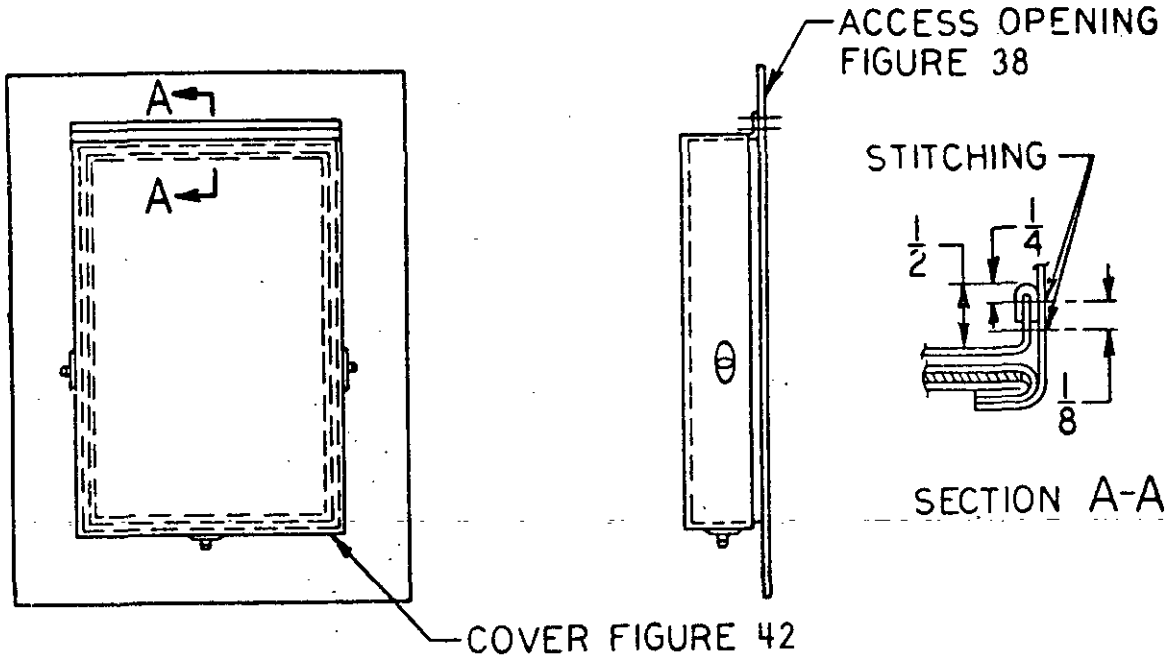


FIGURE 40. ACCESS OPENING ASSEMBLY.

NOTES


STITCHING: TYPE 301, FED-STD-751, 8 TO 10 STITCHES PER INCH SMALLEST NEEDLE SIZE FEASIBLE SHOULD BE USED IN ORDER TO ASSURE WEATHER PROOF SEAMS

THREAD: NYLON, TYPE II, CLASS 1, SIZE F, COLOR O D, NO. X24087, F S 595, SPEC. V-T-295

DIM. & TOL. PER MIL-STD-8

DIM. IN INCHES TOL. ± 1/8 UNLESS OTHERWISE SPECIFIED


Source: https://assist.dla.mil - Downloaded: 2026-02-22T06:50Z
Check the source to verify that this is the current version before use.

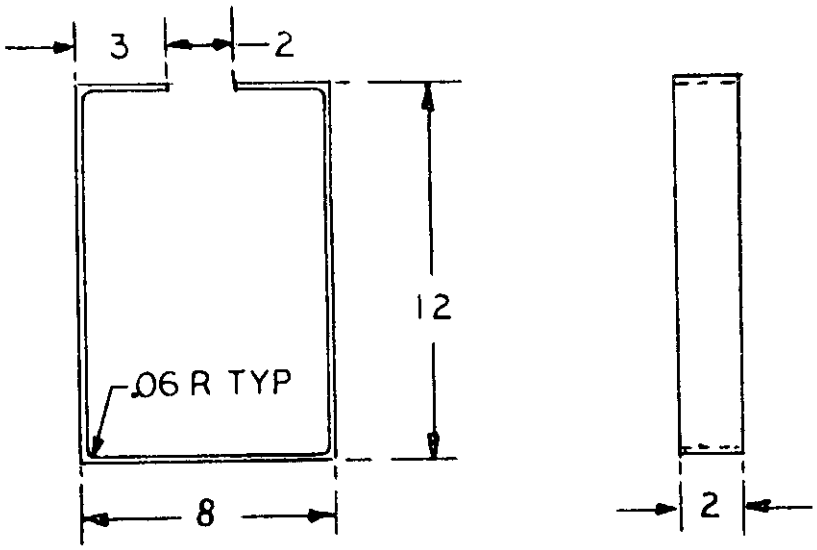



NOTES:
MATERIAL: ALUMINUM ALLOY 5086-H32, SPEC. QQ-A-250/7 OR ALUMINUM ALLOY 5052-H32 OR H34, SPEC QQ-A-250/8 .040 THK.
DIM. IN INCHES TOL. ±1/16 UNLESS OTHERWISE SPECIFIED

FIGURE 41. INSERT, ACCESS OPENING.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

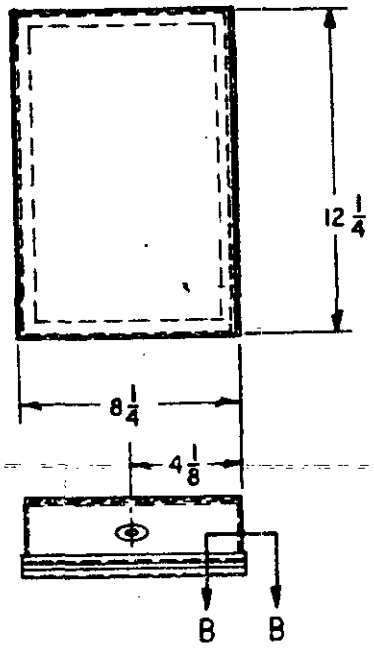

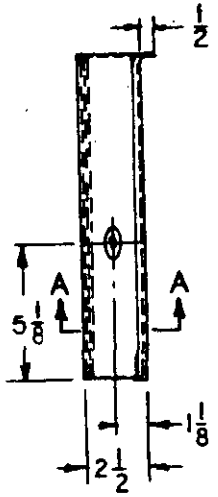

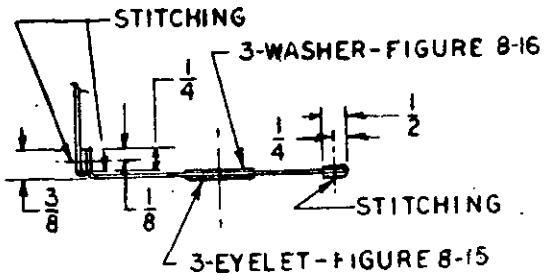

SECTION A-A

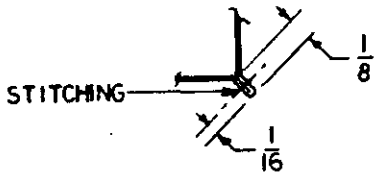


TYP CORNER
SECTION B-B

FIGURE 42. ACCESS COVER OPENING.

MATERIAL NOTE:
CLOTH, TYPE II, CLASS 3, SPEC MIL-C-20696, EXCEPT
MIN. COATED WEIGHT WILL BE 14 OZ. PER SQ. YD. COLOR OLIVE DRAB
STITCHING NOTE
STITCHING, TYPE 301, FED. STD. 751, 8 TO 10 STITCHES PER INCH
SMALLEST NEEDLE SIZE FEASIBLE SHOULD BE USED IN ORDER
TO ASSURE WEATHER PROOF SEAMS
THREAD
NYLON, TYPE I, CLASS 1, SIZE F, COLOR, OLIVE DRAB
NO X24087, F.S. 595, SPEC V-T-295

DIM IN INCHES TOL ±1/8 UNLESS OTHER WISE SPECIFIED

Source: https://assist.dla.mil. Downloaded: 2026-02-22T06:50Z
Check the source to verify that this is the current version before use.

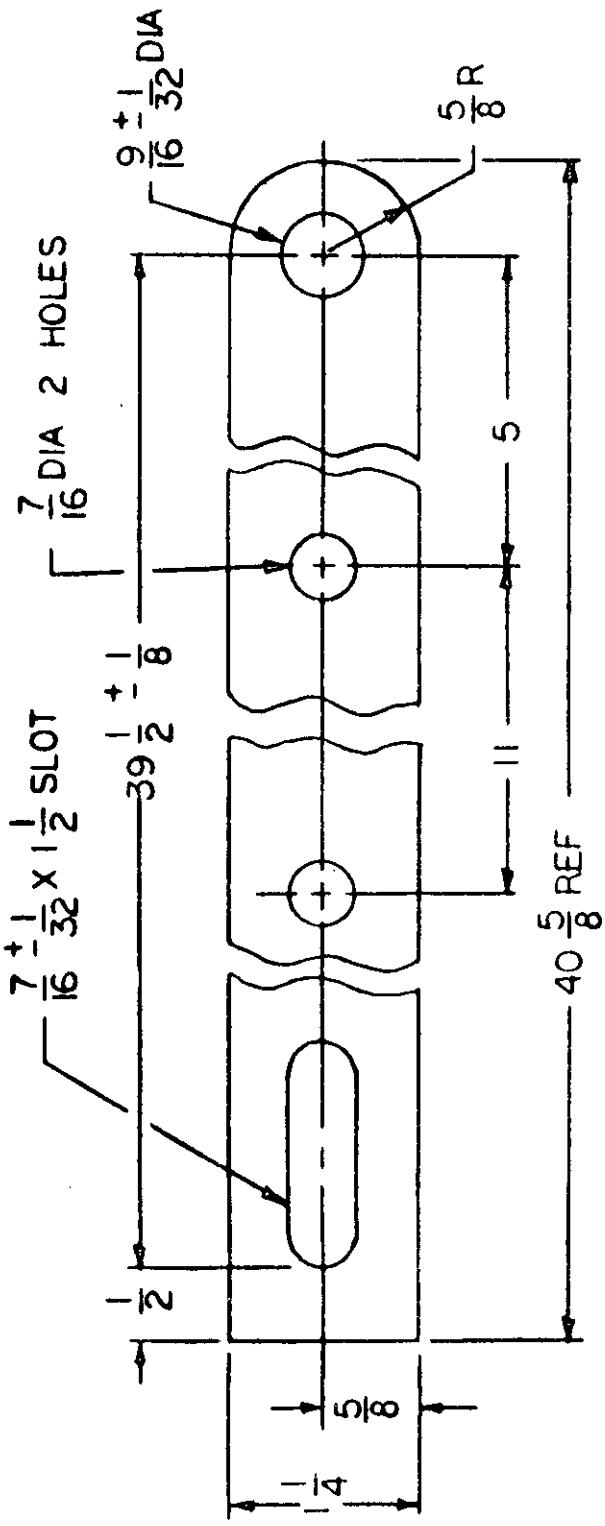

NOTES


1 MATERIAL
STEEL, CARBON, GRADE A OR B, SPEC QQ-S-741 1/4 THK OR
STEEL, CARBON, 1010 THRU 1025, SPEC QQ-S-631

2 FINAL PROTECTIVE FINISH
CAD PLATE, TYPE II, CLASS 3, SPEC QQ-P-416

3 DIM IN INCHES, TOL. ± 1/16, UNLESS OTHERWISE SPECIFIED

FIGURE 43. SUPPORT.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

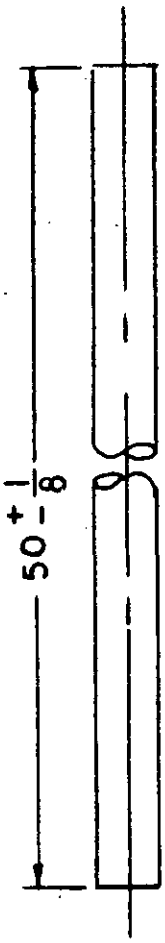


NOTES:

1. MATERIAL: STEEL, CARBON, C1010 THRU C1020, SPEC QQ-S-634, 3/8 DIA
2. FINISH:
   CAD PLATE, TYPE II, CLASS 3, SPEC QQ-P-416
3. DIM. IN INCHES, TOL. ON FRACTIONS ±1/16 UNLESS OTHERWISE SPECIFIED
4. INTERPRET DIM. AND TOL. PER USASI Y14.5 - 1966

FIGURE 44. ROD, METAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

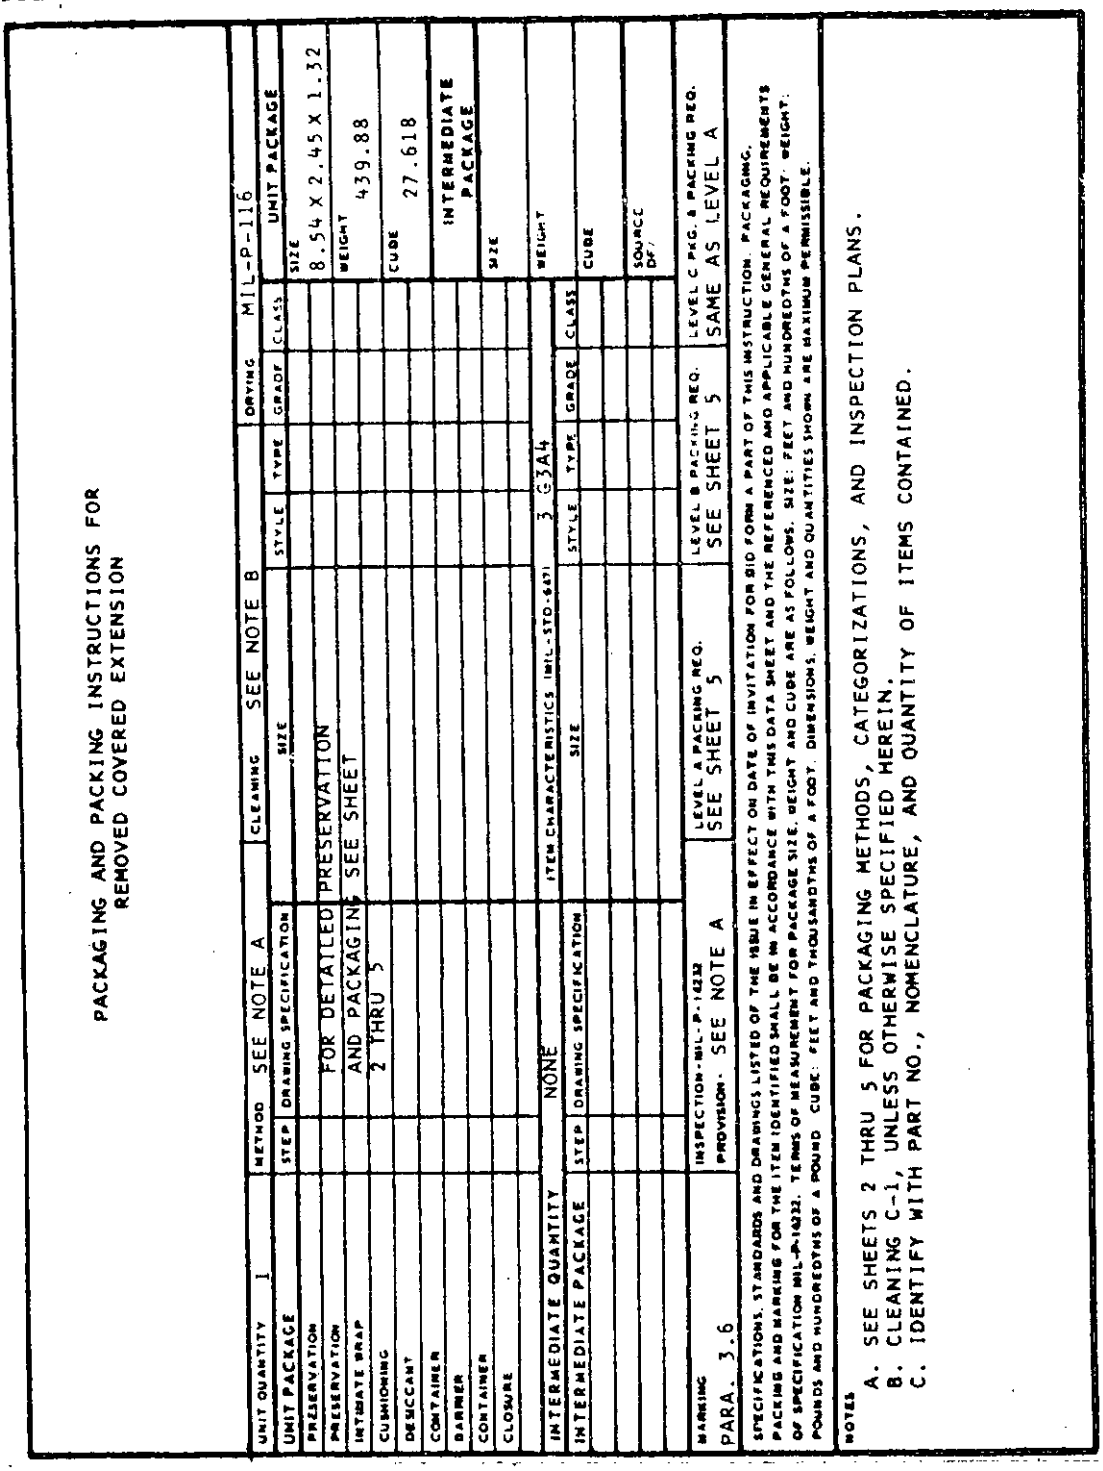

SHEET 1 OF 9

FIGURE 45. PACKAGING AND PACKING INSTRUCTIONS FOR REMOVED COVERED EXTENSION.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

PACKAGING:

1. RETAINER 10932339 2 EACH
   PACKAGE TOGETHER AS FOLLOWS: (1 PACKAGE REQUIRED)
   STEP:
   1. PRESERVATIVE: MIL-C-16173, GRADE 4, APPLY TO ALL UNPAINTED METAL SURFACES.
   2. INTIMATE WRAP: MIL-B-121, TYPE II, GRADE A, CLASS 2, SIZE 8 X 8, SECURE WITH PPP-T-76 TAPE.
   3C. IDENTIFICATION: REQUIRED
   CATEGORY B5A1 - METHOD I
   INSPECTION PLAN A APPLIES - SECTION 4

2. BRACKET 10932346 2 EACH
   PACKAGE ABOVE ITEM SEPARATELY AS FOLLOWS: (2 PACKAGES REQUIRED)
   STEP:
   1. PRESERVATIVE: MIL-C-16173, GRADE 4, APPLY TO ALL UNPAINTED METAL SURFACES
   2C. IDENTIFICATION: REQUIRED
   CATEGORY B5A1 - METHOD I
   INSPECTION A APPLIES - SECTION 4

3. END FITTING 10918142 2 EACH
   PACKAGE TOGETHER AS FOLLOWS: (1 PACKAGE REQUIRED)
   STEP:
   1. PRESERVATIVE: MIL-C-16173, GRADE 4 APPLY TO ALL UNPAINTED METAL SURFACES
   2. INTIMATE WRAP: MIL-B-121, TYPE II, GRADE A, CLASS 2, SIZE 12 X 12, SECURE WITH PPP-T-76 TAPE
   3C. IDENTIFICATION: REQUIRED
   CATEGORY B5A1 - METHOD I
   INSPECTION PLAN A APPLIES - SECTION 4

4. RUBBER STRIP 10932239-4 1 EACH
   COIL ABOVE ITEM TO 4 1/4 X 4 1/4 DIA. AND PACKAGE AS FOLLOWS: (1 PACKAGE REQUIRED)
   STEP:
   1. PRESERVATIVE: NONE
   2. BAG: MIL-B-117, STYLE 2, TYPE I, CLASS B, 4 MIL, SIZE 9 X 10
   3C. IDENTIFICATION: REQUIRED
   CATEGORY H7A4 - METHOD IC-3
   INSPECTION PLAN H APPLIES - SECTION 4

5. LIGHT ASSEMBLY 10918129 2 EACH
   COIL ABOVE ITEMS DIRECTLY INTO CARTON AS FOLLOWS: (1 PACKAGE REQUIRED)
   STEP:
   1. PRESERVATIVE: NONE
   2. CONTAINER: PPP-B-636, STYLE RSC, TYPE CF, GRADE 200, CLASS DOM., VARIETY SW, SIZE 12 5/8 X 7 3/8 X 3 1/2
   3. CLOSURE: UU-T-106, 2 X 19 (2 PCS)
   4. BAG: MIL-B-117, STYLE 2, TYPE I, CLASS B, 4 MIL, SIZE 13 X 20
   5C. IDENTIFICATION: REQUIRED
   CATEGORY G8A4 - METHOD IC-2
   INSPECTION PLAN H APPLIES - SECTION 4

6. BAG, STOWAGE 6571860 2 EACH
   PACKAGE ABOVE ITEMS AS FOLLOWS: (2 PACKAGES REQUIRED)
   STEP:
   1. PRESERVATIVE: NONE
   2C. IDENTIFICATION: REQUIRED
   CATEGORY F7A1 - METHOD III
   INSPECTION PLAN R APPLIES - SECTION 4


7. STRAP 8690541 4 EACH
   COIL EACH OF THE ABOVE ITEMS TO 6 X 4 DIA. AND SECURE WITH PPP-T-76 TAPE. (4 PACKAGES REQUIRED)

SHEET 2

SHEET 2 OF 9

FIGURE 45. PACKAGING AND PACKING INSTRUCTIONS FOR REMOVED COVERED EXTENSION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

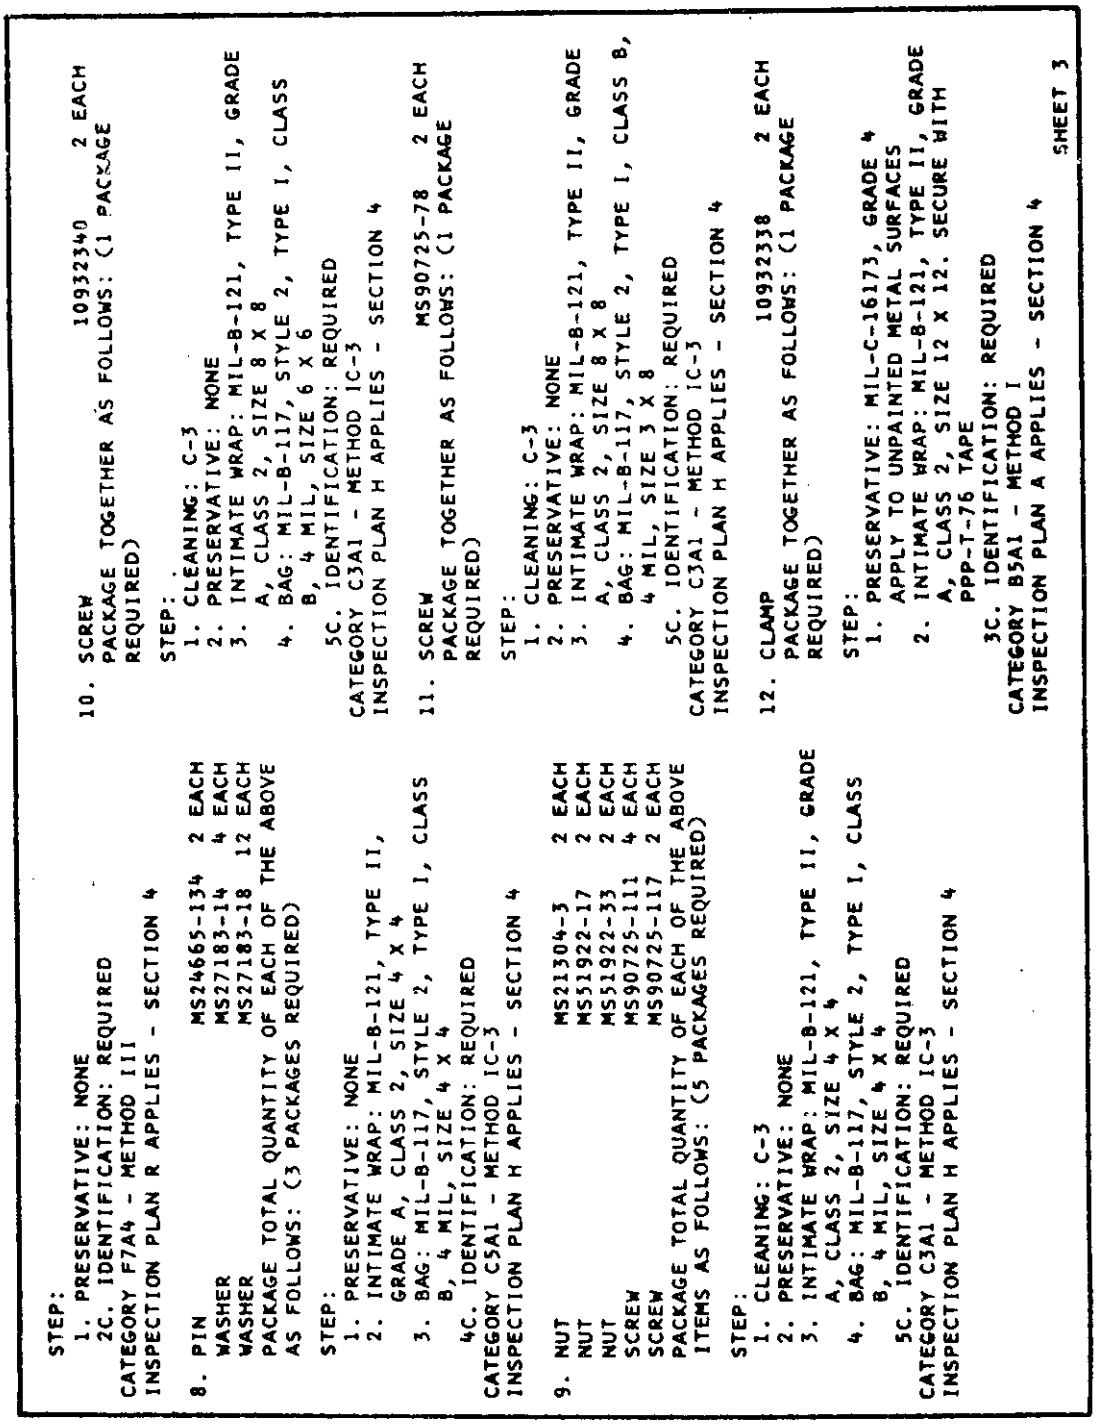

```
   STEP:
     1. PRESERVATIVE: NONE
     2C. IDENTIFICATION: REQUIRED
CATEGORY F7A4 - METHOD III
INSPECTION PLAN R APPLIES - SECTION 4

8. PIN                    MS24665-134   2 EACH
   WASHER                 MS27183-14    4 EACH
   WASHER                 MS27183-18   12 EACH
   PACKAGE TOTAL QUANTITY OF EACH OF THE ABOVE
   AS FOLLOWS: (3 PACKAGES REQUIRED)

   STEP:
     1. PRESERVATIVE: NONE
     2. INTIMATE WRAP: MIL-B-121, TYPE II,
          GRADE A, CLASS 2, SIZE 4 X 4
     3. BAG: MIL-B-117, STYLE 2, TYPE I, CLASS
          B, 4 MIL, SIZE 4 X 4
     4C. IDENTIFICATION: REQUIRED
CATEGORY C5A1 - METHOD IC-3
INSPECTION PLAN H APPLIES - SECTION 4

9. NUT                    MS21304-3     2 EACH
   NUT                    MS51922-17    2 EACH
   NUT                    MS51922-33    2 EACH
   SCREW                  MS90725-111   4 EACH
   SCREW                  MS90725-117   2 EACH
   PACKAGE TOTAL QUANTITY OF EACH OF THE ABOVE
   ITEMS AS FOLLOWS: (5 PACKAGES REQUIRED)

   STEP:
     1. CLEANING: C-3
     2. PRESERVATIVE: NONE
     3. INTIMATE WRAP: MIL-B-121, TYPE II, GRADE
          A, CLASS 2, SIZE 4 X 4
     4. BAG: MIL-B-117, STYLE 2, TYPE I, CLASS
          B, 4 MIL, SIZE 4 X 4
     5C. IDENTIFICATION: REQUIRED
CATEGORY C3A1 - METHOD IC-3
INSPECTION PLAN H APPLIES - SECTION 4

10. SCREW                 10932340      2 EACH
    PACKAGE TOGETHER AS FOLLOWS: (1 PACKAGE
    REQUIRED)

    STEP:
      1. CLEANING: C-3
      2. PRESERVATIVE: NONE
      3. INTIMATE WRAP: MIL-B-121, TYPE II, GRADE
           A, CLASS 2, SIZE 8 X 8
      4. BAG: MIL-B-117, STYLE 2, TYPE I, CLASS
           B, 4 MIL, SIZE 6 X 6
        5C. IDENTIFICATION: REQUIRED
CATEGORY C3A1 - METHOD IC-3
INSPECTION PLAN H APPLIES - SECTION 4

11. SCREW                 MS90725-78    2 EACH
    PACKAGE TOGETHER AS FOLLOWS: (1 PACKAGE
    REQUIRED)

    STEP:
      1. CLEANING: C-3
      2. PRESERVATIVE: NONE
      3. INTIMATE WRAP: MIL-B-121, TYPE II, GRADE
           A, CLASS 2, SIZE 8 X 8
      4. BAG: MIL-B-117, STYLE 2, TYPE I, CLASS B,
           4 MIL, SIZE 3 X 8
        5C. IDENTIFICATION: REQUIRED
CATEGORY C3A1 - METHOD IC-3
INSPECTION PLAN H APPLIES - SECTION 4

12. CLAMP                 10932338      2 EACH
    PACKAGE TOGETHER AS FOLLOWS: (1 PACKAGE
    REQUIRED)

    STEP:
      1. PRESERVATIVE: MIL-C-16173, GRADE 4
           APPLY TO UNPAINTED METAL SURFACES
      2. INTIMATE WRAP: MIL-B-121, TYPE II, GRADE
           A, CLASS 2, SIZE 12 X 12. SECURE WITH
           PPP-T-76 TAPE
        3C. IDENTIFICATION: REQUIRED
CATEGORY B5A1 - METHOD I
INSPECTION PLAN A APPLIES - SECTION 4
                                          SHEET 3
```

SHEET 3 OF 9

FIGURE 45. PACKAGING AND PACKING INSTRUCTIONS FOR REMOVED COVERED EXTENSION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

13. CONSOLIDATE PACKAGES FROM PARA 1 THRU 12 INTO:

STEP:
1. CONTAINER: PPP-B-636, STYLE RSC, TYPE CF, GRADE W5C, CLASS W-R, SIZE 26 1/4 X 13 1/8 X 5
2. CLOSURE: PPP-T-76, 2 X 33 (2 PCS)
3C. IDENTIFICATION: REQUIRED

14. COVER 11617260 1 EACH
FOLD COVER TO 72 X 26 X 5

STEP:
1. PRESERVATIVE: NONE
2. CONTAINER: PPP-B-636, STYLE FOL, TYPE CF, GRADE V3C, CLASS W-R, SIZE 26 1/8 X 5 1/8 X 73
3. CLOSURE: PPP-T-76, 2 X 33 (2 PCS)
4C. IDENTIFICATION: REQUIRED
CATEGORY F7A4 - METHOD III
INSPECTION PLAN R APPLIES - SECTION 4

15. PIN, TENT 11633164 48 EACH
PACKAGE TOGETHER AS FOLLOWS: TWO LAYERS OF 17 EACH AND ONE LAYER OF 14 EACH AS SHOWN ON SHEET 9. (1 PACKAGE REQUIRED)

STEP:
1. PRESERVATIVE: NONE
2. CUSHIONING: PPP-P-291, STYLE 1, TYPE III, SIZE 26 X 8 (4 PCS), ONE PIECE BETWEEN EACH LAYER
3. CONTAINER: PPP-B-636, STYLE RSC, TYPE CF, GRADE V3C, CLASS W-R, SIZE 26 1/4 X 7 7/8 X 2
4. CLOSURE: PPP-T-76, 2 X 33 (2 PCS)
5C. IDENTIFICATION: REQUIRED
CATEGORY E5B1 - METHOD III
INSPECTION PLAN R APPLIES - SECTION 4

16. FRAME ASSEMBLY, COVERED EXTENSION CONSISTING OF: 10918155 1 EACH

17. SUPPORT 10918143 4 EACH
SLIDE TUBE 10918135 4 EACH
INSERT SLIDE TUBES INTO SUPPORTS AND TELESCOPE TO SMALLEST DIMENSIONS, LOCK IN PLACE WITH LOCK PINS. SECURE PINS AND ATTACHING CHAINS TO SUPPORT WITH PPP-T-60 TAPE
PACKAGE ABOVE ITEMS AS FOLLOWS:
(4 PACKAGES REQUIRED)

STEP:
1. PRESERVATIVE: MIL-C-16173, GRADE 4
APPLY TO ALL UNPAINTED METAL SURFACES
2C. IDENTIFICATION: REQUIRED
CATEGORY B5B1 - METHOD I
INSPECTION PLAN A APPLIES - SECTION 4

18. FRAME SECTION 10932317 2 EACH
FRAME SECTION 10932342 2 EACH
INSERT FRAME SECTION PART NO. 10932342 INTO FRAME SECTION PART NO. 10932317 AND TELESCOPE TO SMALLEST DIMENSION. LOCK IN PLACE WITH LOCK PINS. SECURE PINS AND ATTACHING CHAINS TO FRAME SECTION WITH PPP-T-60 TAPE.
PACKAGE ABOVE ITEM AS FOLLOWS:
(2 PACKAGES REQUIRED)

STEP:
1. PRESERVATIVE: MIL-C-16173, GRADE 4
APPLY TO ALL UNPAINTED METAL SURFACES
2C. IDENTIFICATION: REQUIRED
CATEGORY B5B1 - METHOD I
INSPECTION PLAN A APPLIES - SECTION 4

SHEET 4

SHEET 4 OF 9

FIGURE 45. PACKAGING AND PACKING INSTRUCTIONS FOR REMOVED COVERED EXTENSION.

Source: https://assist.dla.mil -- Downloaded: 202610-22T06:50Z
Check the source to verify that this is the current version before use.

19. FRAME, SECTION 10918147-1 1 EACH

STEP:
1. PRESERVATIVE: MIL-C-16173, GRADE 4
APPLY TO ALL UNPAINTED METAL SURFACES
2C. IDENTIFICATION: REQUIRED
CATEGORY B581 - METHOD 1
INSPECTION PLAN A APPLIES - SECTION 4

20. FRAME, SECTION 10918147-2 1 EACH

STEP:
1. PRESERVATIVE: MIL-C-16173, GRADE 4
APPLY TO ALL UNPAINTED METAL SURFACES
2C. IDENTIFICATION: REQUIRED
CATEGORY B581 - METHOD 1
INSPECTION PLAN A APPLIES - SECTION 4

21. FRAME SECTION 10918148 3 EACH
PACKAGE TOTAL QUANTITY OF EACH OF THE ABOVE
ITEMS AS FOLLOWS: (3 PACKAGES REQUIRED)

STEP:
1. PRESERVATIVE: MIL-C-16173, GRADE 4
APPLY TO ALL UNPAINTED METAL SURFACES
2C. IDENTIFICATION: REQUIRED
CATEGORY B581 - METHOD 1
INSPECTION PLAN A APPLIES - SECTION 4

PACKING:

PLACE ITEMS FROM PARA. 13, 14, 15, AND 17 THRU 21 INTO:

1. CONTAINER: PPP-B-621, STYLE 2, CLASS 2, SIZE 99 3/4 X 26 5/8 X 11 1/4, OUTSIDE BATTENS REQUIRED (PPP-B-601, STYLE 1, OVERSEAS TYPE MAY BE USED AS AN OPTIONAL CONTAINER.)


2. FOR DETAILS OF FABRICATION, PLACEMENT OF BLOCKING AND PACKAGES, SEE SHEETS 6 THRU 9.

SHEET 5

SHEET 5 OF 9

FIGURE 45. PACKAGING AND PACKING INSTRUCTIONS FOR REMOVED COVERED EXTENSION.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

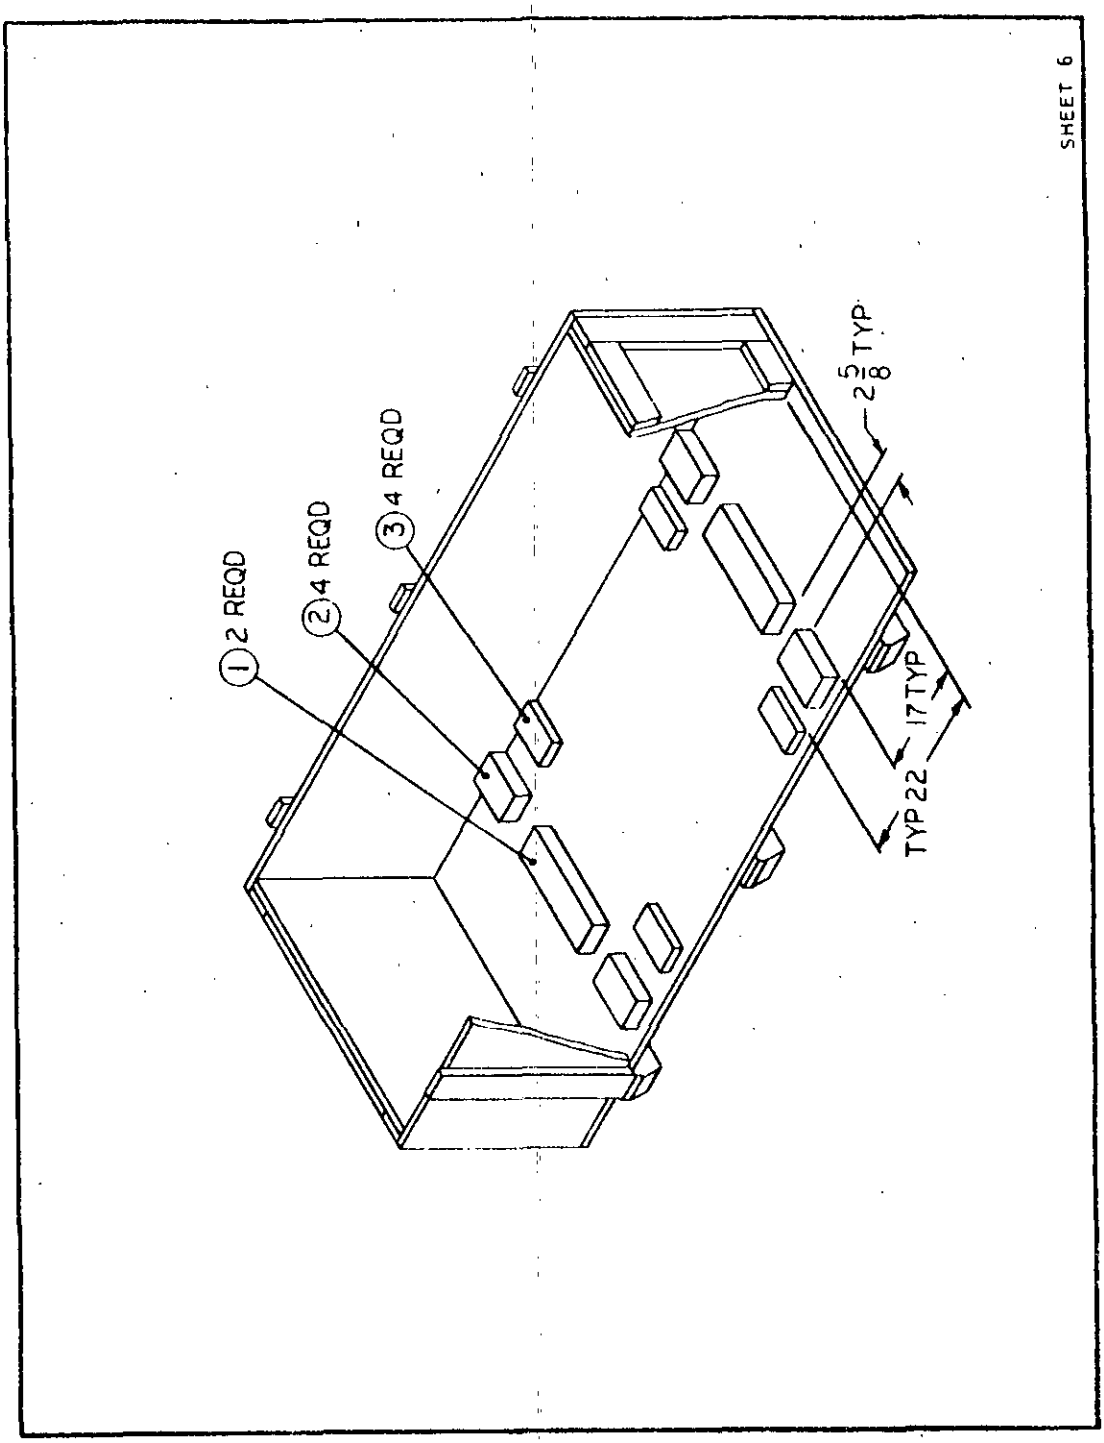

SHEET 6 OF 9

FIGURE 45. PACKAGING AND PACKING INSTRUCTIONS FOR REMOVED COVERED EXTENSION.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

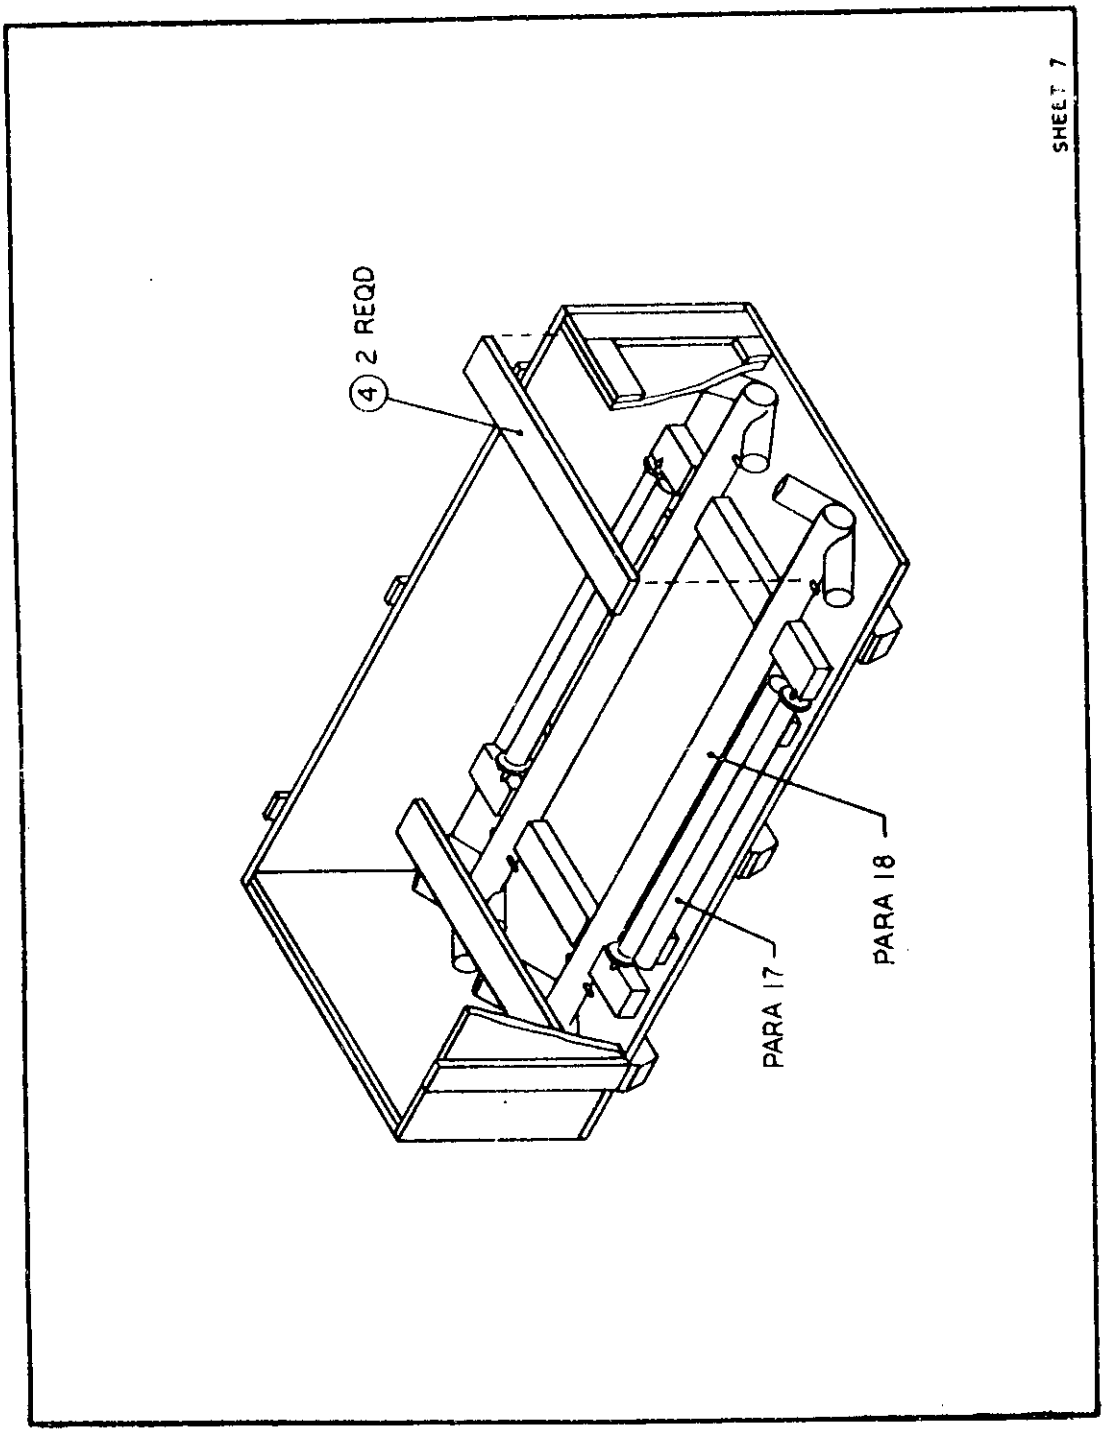

SHEET 7 OF 9

FIGURE 45. PACKAGING AND PACKING INSTRUCTIONS FOR REMOVING COVERED EXTENSION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

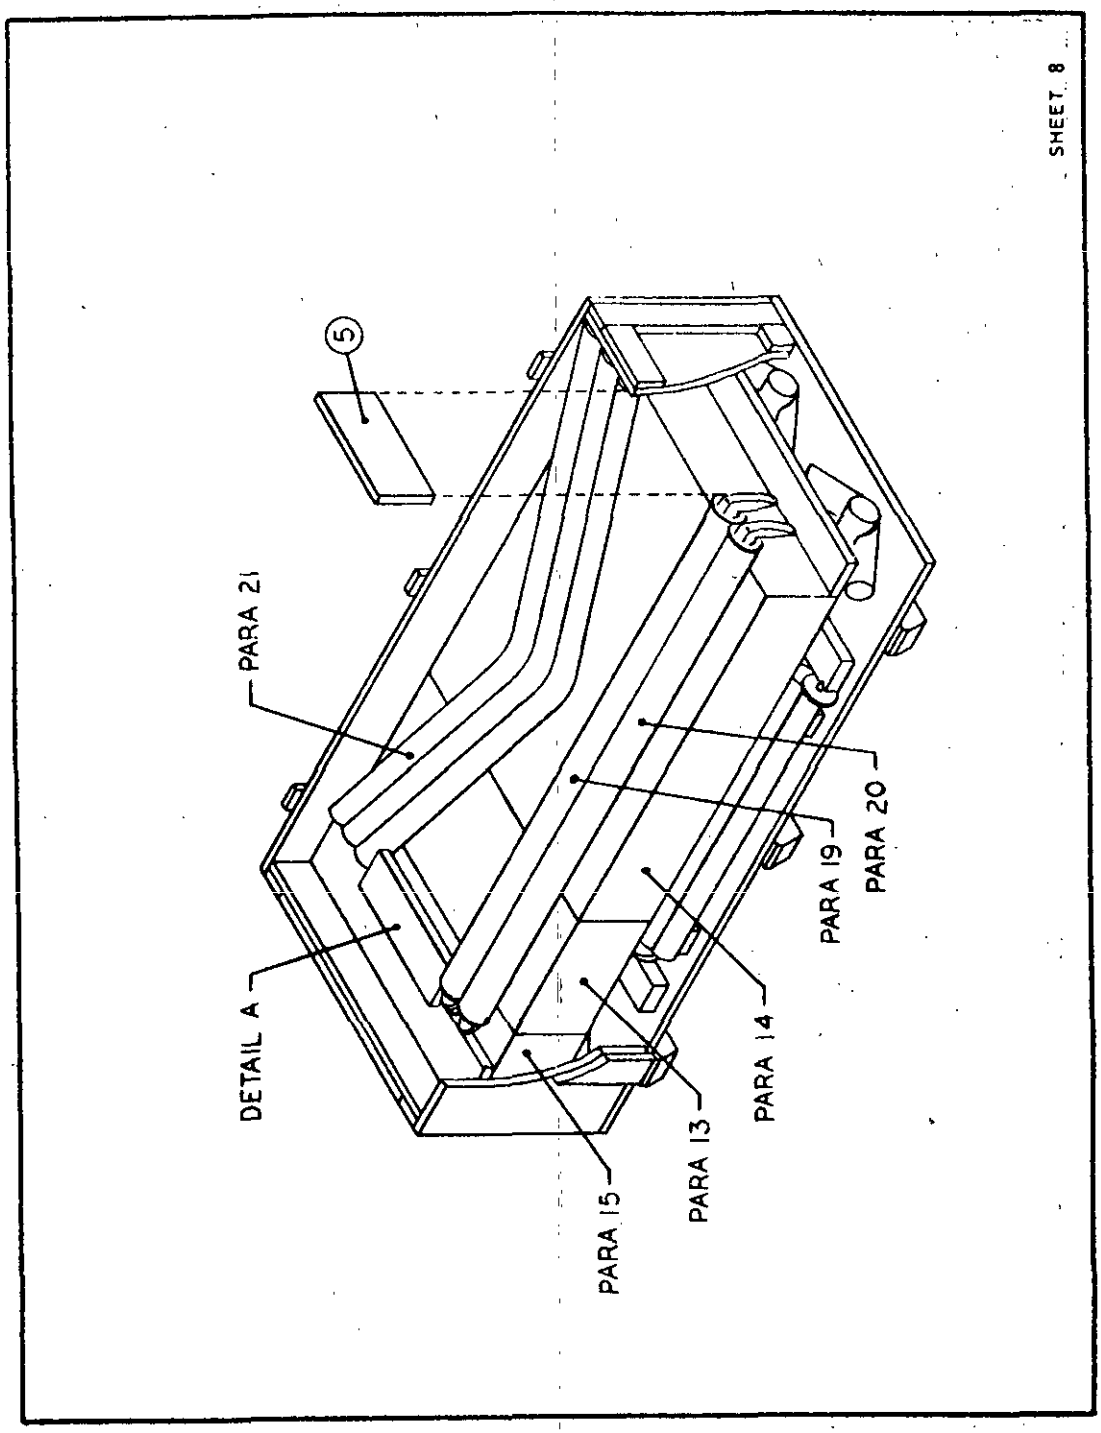

SHEET 8 OF 9

FIGURE 45. PACKAGING AND PACKING INSTRUCTIONS FOR REMOVING COVERED EXTENSION.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

ITEM	DESCRIPTION	REQD	NOTE
1.	2 X 4 NOM X 11 3/4	2	1
2.	2 X 4 NOM X 4 3/4	4	1
3.	1 X 4 NOM X 4 3/4	4	1
4.	1 X 4 NOM X 26 1/2	2	1
5.	1 X 4 NOM X 16 1/4	1	1
6.	1 X 4 NOM X 14 1/4 SEE DETAIL A	1	1
7.	1 NOM X 8 1/8 X 26 1/2 SEE DETAIL A	1	1


NOTES:

1. LUMBER, MIL-STD-731, GROUP I OR II
2. NAILING OF BLOCKING PER MIL-STD-1186

SHEET 9

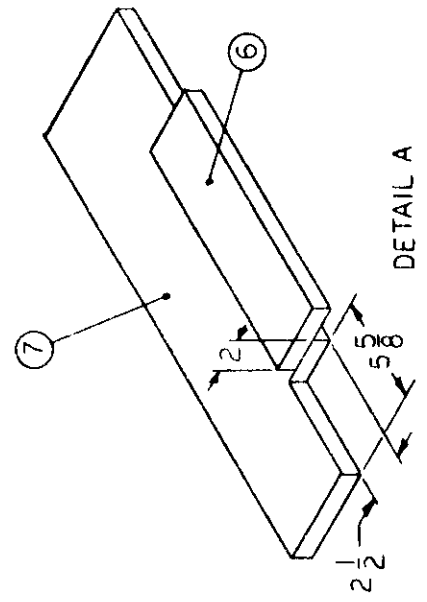

DETAIL A

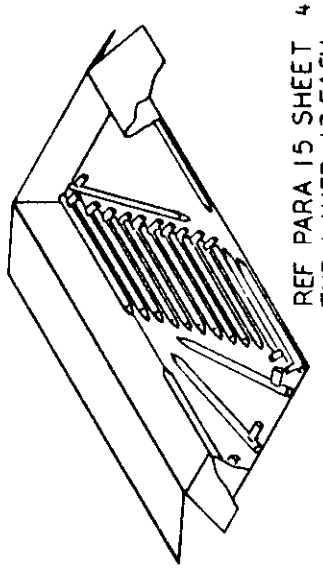

REF PARA 15 SHEET 4
TYP LAYER 17 EACH

SHEET 9 OF 9

FIGURE 45. PACKAGING AND PACKING INSTRUCTIONS FOR REMOVING COVERED EXTENSION.

Source: https://assist.dla.mil -- Downloaded: 2022-10-22T06:50Z
Check the source to verify that this is the current version before use.

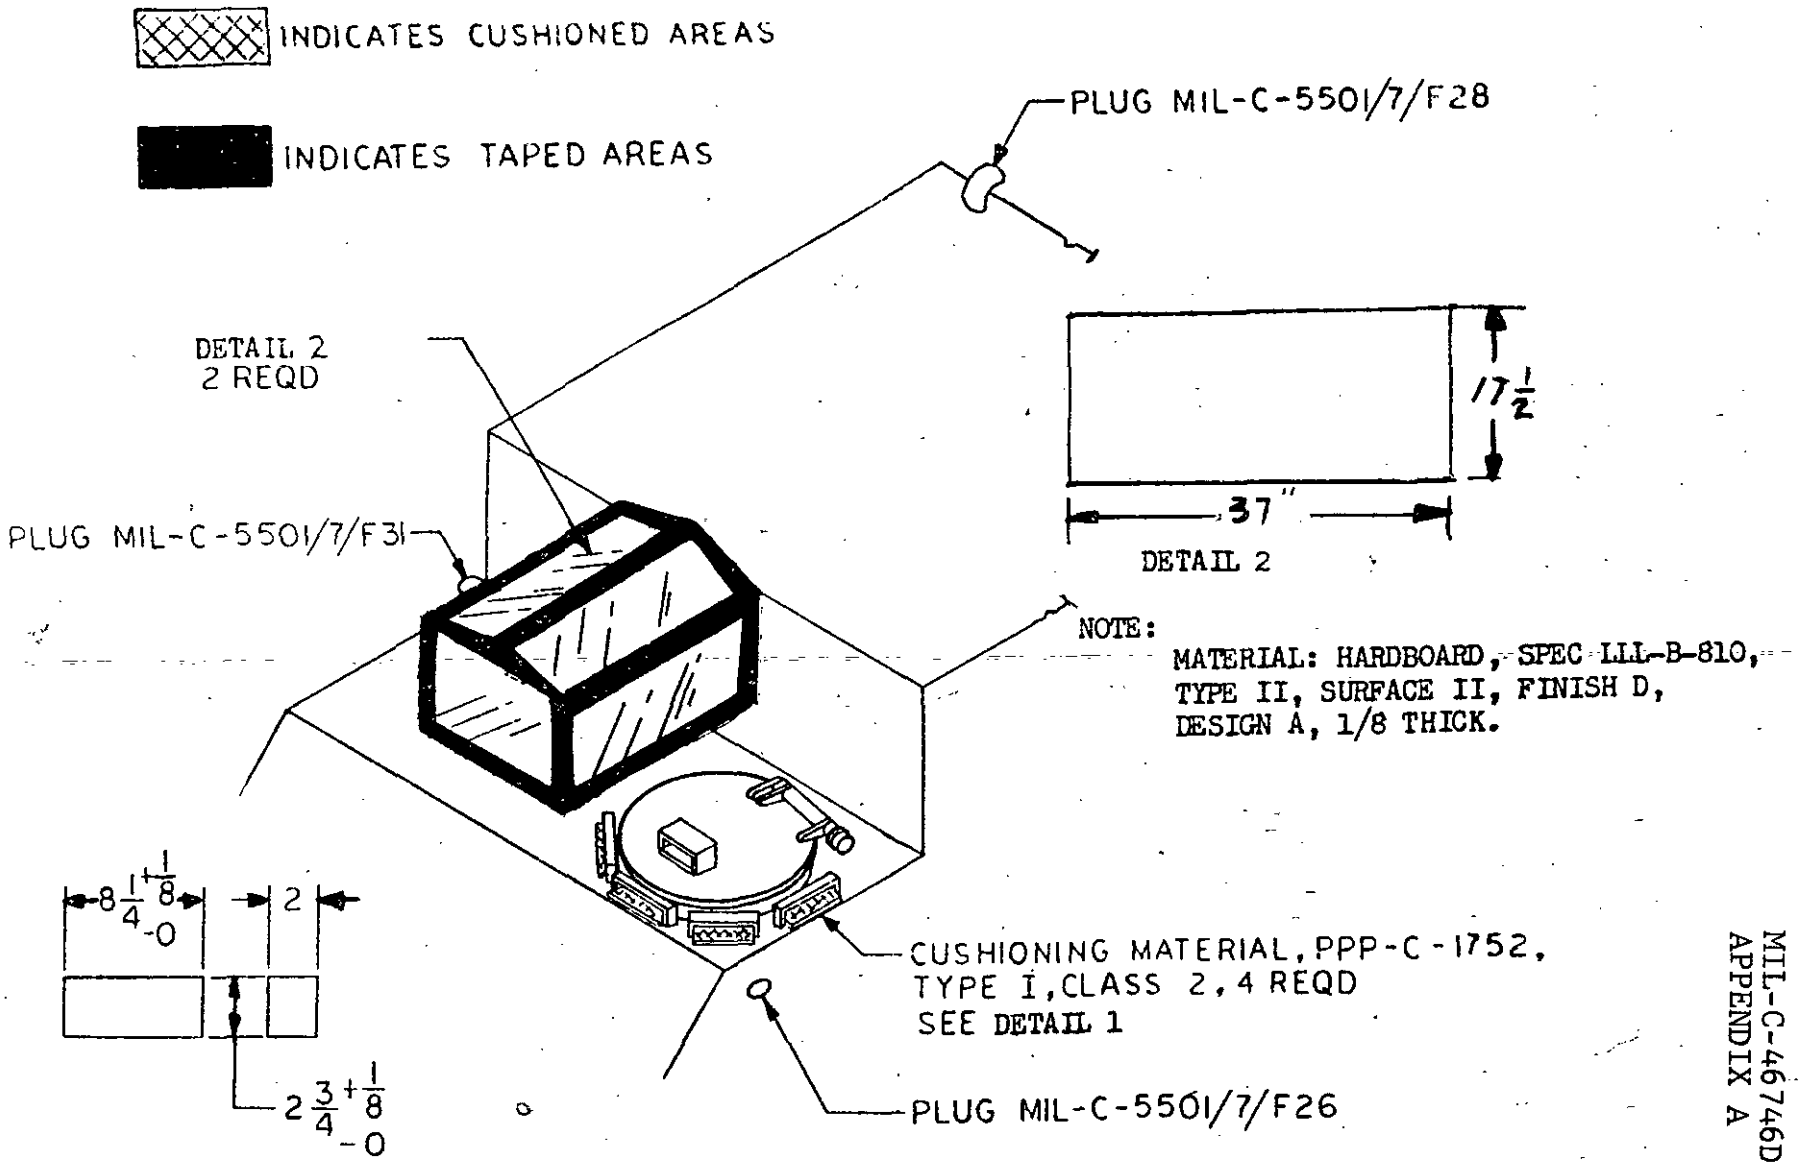


FIGURE 16. LEVEL B CLOSURES.

Source: https://assist.dla.mil -- Downloaded: 4/22/10 2:22T06:50Z
Check the source to verify that this is the current revision.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-C-46746D(AT)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 **1426** REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 20261O-22T06:50Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Tank-Automotive
Materiel Readiness Command
ATTN: DRSTA-GSS
Warren, MI 48090

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.