MILITARY SPECIFICATION

CARRIER, COMMAND POST, LIGHT TRACKED:
M577 AND M577A1
PROCESSING FOR STORAGE AND SHIPMENT OF

This amendment forms a part of Military Specification MIL-C-46746D(AT), dated 6 September 1978, and is approved for use by US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Title, delete in its entirety and substitute:

"CARRIER, COMMAND POST, LIGHT TRACKED:
M577, M577A1, AND M577A2, PROCESSING
FOR STORAGE AND SHIPMENT OF"

1.1, line 1, after "M577" insert a comma.

1.1, line 2, delete "and" before "M577A1", and add: ", and M577A2" thereafter.

PAGE 2

2.1, under "SPECIFICATIONS, FEDERAL", add:

"O-S-801	- Sulfuric Acid Electrolyte; for Storage Batteries.
NN-P-530	- Plywood, Flat Panel.
QQ-W-470	- Wire, Steel, Carbon, Spring, Music.
RR-W-360	- Wire Fabric, Industrial.
PPP-B-601	- Boxes, Wood, Cleated Plywood.
PPP-B-621	- Box, Wood, Nailed, and Lock Corner.
PPP-C-1752	- Cushioning Material, Packaging Unicellular, Polyethylene Foam, Flexible."

AMSC N/A AREA PACK

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

PAGE 3

2.1, under "SPECIFICATIONS, MILITARY", delete:

"MIL-S-207 - Sulfuric Acid Electrolyte, Packaging, Packing, and Marking for Shipment and Storage of."

2.1, under "SPECIFICATIONS, MILITARY", add:

"MIL-H-52079 - Hose, Preformed, Semi-flexible, Reinforced."

2.1, under "STANDARDS, MILITARY", add:

"MS35842 - Clamp, Hose, Low Pressure, type "f"."

PAGE 4

2.1, under "PACKAGING DATA SHEETS", delete "8736419" and "8736577" in their entirety and substitute:

"11633155 - Covered Extension, Installation."

PAGE 6

3.1.7.1, delete entire paragraph and substitute:

"Interior of vehicle. Interior surfaces of vehicle shall be cleaned with solution of detergent conforming to P-D-220 or type I of MIL-D-16791 and water. Solution temperature shall not exceed 210°F, and pressure shall not exceed 5 PSI measured 4 inches from the nozzle. After cleaning, cleaned surfaces shall be rinsed with clean water and dried. Care shall be taken during cleaning and rinsing operations to assure that no solution or water enters instruments, connections, or other components susceptible to water damage. Solution or water shall not accumulate and remain in cavities that cannot be drained. Vehicles with decals, markers, straps, and floor plates installed shall only be hand cleaned with solution of P-D-220 or type I of MIL-D-16791 and water to prevent damage to these components. Cleaned surfaces shall be hand rinsed and dried."

3.1.8.1, line 1, after "than" delete "50 miles" and substitute "75 miles".

PAGE 13

3.1.8.11, delete entire paragraph.

*3.1.8.12, lines 3, 4, and 5, delete "For shipment, hatches and doors shall be closed and locked from the inside. Driver's hatch shall be locked with a bolt and nut, with nut welded to bolt." and substitute: "For shipment, hatches and doors shall be closed and locked from the inside, except the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

driver's hatch. The driver's hatch shall be closed and secured from the outside with a bolt having a nut drawn up tight and exposed threads peened over to prevent easy removal, or a bolt having a nut drawn up tight with the nut tack welded to the bolt, or with a Government issued padlock."

3.1.8.13.1, delete entire paragraph and substitute:

"Engine compartment access plate and drain plugs. Engine compartment access plate and gasket with attaching hardware shall be removed for ventilation. A screen conforming to figure 4 shall be installed in the access plate opening, and secured with four of the existing mounting screws and washers. The two forward drain plugs and the rear bilge drain plug shall be removed for drainage. A screen conforming to figure 4A shall be installed in rear bilge opening and held in place with spring retainer conforming to figure 4B. Bare metal surfaces of drain plugs shall be preserved with compound conforming to grade 4 of MIL-C-16173. Plate, gasket, preserved drain plugs, and four access plate mounting screws and washers shall be packaged as specified in 3.1.9.7. The information "Remove screens, install access plate and gasket front and rear drain plugs before vehicle operation" shall be stenciled on the exterior of the vehicle using white or yellow paint conforming to MIL-P-13983. Stenciling shall be in characters not less than 3/4-inch high."

3.1.8.13.2, lines 1 and 2, delete: "The engine compartment panels", and substitute: "One engine compartment panel".

3.1.8.13.2, line 4, delete "PANELS" and substitute "PANEL".

PAGE 14

3.1.9.2, delete entire paragraph and substitute:

"Electrolyte. Electrolyte shall be packaged and packed in accordance with O-S-801, except that the exterior container shall conform to PPP-B-621, class 2, or PPP-B-601 overseas type. Marking shall conform to O-S-801. The packed electrolyte shall be stowed in the same location as the BII and secured independently to permit separate removal."

PAGE 15

3.1.9.8, line 1, delete "3.1.9.8" and substitute: "3.1.9.6".

3.1.6.1, line 1, delete "3.1.6.1" and substitute: "3.1.9.6.1".

3.1.6.1, line 6, delete "class B" and substitute: "class 1, finish A".

3.1.6.1, line 9, delete "class B" and substitute: "class 1, finish A".

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

Add the following paragraphs:

"3.1.9.9 Command post extension cover. The command post extension cover installation, except the side and top clamping strips and attaching hardware, shall be disassembled from the vehicle, and packaged and packed in accordance with packaging data sheet 11633155. The packed extension cover shall be stowed and secured with the BII.

3.1.9.10 Antenna guards. Antenna guards and related hardware shall be removed for shipment, and packaged in type CF, class weather-resistant box conforming to PPP-B-636. The box shall be closed with tape conforming to PPP-T-60, type III, class 1, identified as to contents and securely stowed within the personnel compartment."

3.1.10.1.1, delete entire paragraph and substitute:

"Closure marking. The information "TO LIFT VEHICLE FOR LOADING, UNFASTEN ACCESS COVERS FROM FRONT AND REAR COVER EXPOSING LIFTING EYES - AFTER LOADING, SECURE COVER IN THE ORIGINAL POSITION" shall be stenciled on the front and rear of the closure in characters a minimum of 3/4-inch high, using white enamel conforming to TT-E-529."

PAGE 16

3.1.10.1.2 under "PACKAGING AND SHIPPING INSTRUCTIONS", at end of line 1, after "BOX", delete "period" and add "IF CLOSURE KIT WILL FIT WITHIN DIMENSIONS OF CONTAINER."

3.1.10.1.3, at end of paragraph, add: "Do not mark BII container if it has been ascertained the closure kit will not fit within the dimensions of container."

PAGE 17

3.1.10.2, delete entire paragraph.

3.2.11, delete entire paragraph and substitute:

"Vision block openings. Plugs conforming to PPP-C-1752, type I, class 2, 2 inches thick, shall be installed in the vision block openings (see figure 46)."

PAGE 19

3.6, line 2, after "unloading" add: "(see 6.2)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

3.6.2, delete entire paragraph and substitute:

"Batteries and electrolyte. Batteries shall be filled with electrolyte, fully charged, and battery cables connected (Ref. 3.1.9.1 and 3.1.9.2). After vehicle self-movement for loading or placement in storage, the ground cable at battery shall be disconnected and then secured to battery carrier with 3/4-inch tape conforming to type IV of PPP-T-97. A tag bearing the following message, "Vehicle preserved for drive-away condition. Before cranking, connect ground cable to battery terminal. Engine and fuel tanks not preserved", shall be located in a conspicuous location in the driver's compartment."

PAGE 21

6.2 under "Ordering data," add:

"j. If vehicle drive-on and drive-off capability is required (see 3.6)."

PAGE 22

TABLE I, line 2, delete "(See indicated paragraphs for Level A, B and C requirements)" and substitute: "(See indicated paragraphs for Levels A and B requirements)".

TABLE I, under "Auxiliary engine unit compartment, Preservation, Level B", delete: "3.2.13".

TABLE I, under "Auxiliary engine unit compartment, Packaging/Stowage, Level B", add: "3.2.13".

PAGE 23

TABLE I, under "Air cleaner, Preservation, Levels A and B", delete: "3.1.8.7.6".

TABLE I, under "Air cleaner, Packaging/Stowage, Level A", add: "3.1.8.7.6".

TABLE I, under "Antenna guards, Packaging/Stowage, Levels A and B", delete "3.1.8.11" and substitute: "3.1.9.7".

TABLE I, under "Engine compartment access panels, Packaging/Stowage, Level B," delete "3.1.8.13.2" and substitute "3.2.10".

PAGE 24

TABLE I, under "Fuel tank security", delete: "1/".

TABLE I, under "Closure Disposition Marking", delete: "1/".

TABLE I, under "Components", add: "Vision block openings". Under "Packaging/Stowage, Level B", add: "3.2.11".

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

TABLE I, under "Components", add: "Bilge pump outlets". Under "Packaging/Stowage, Level B", add: "3.2.12".

PAGE 28

Add the following page "28-1" entitled "FIGURE 4A. Screen.", after page 28.

Add the following page "28-2" entitled "FIGURE 4B. Spring Retainer.", after page 28-1.

PAGES 88 thru 96

Figure 45, sheets 1 thru 9: delete.

The margins of this amendment are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.


Custodian:
Army - AT

Preparing activity:
Army - AT

(Project No. PACK-A319)

☆U.S. GOVERNMENT PRINTING OFFICE: 1986–605-036/42991

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

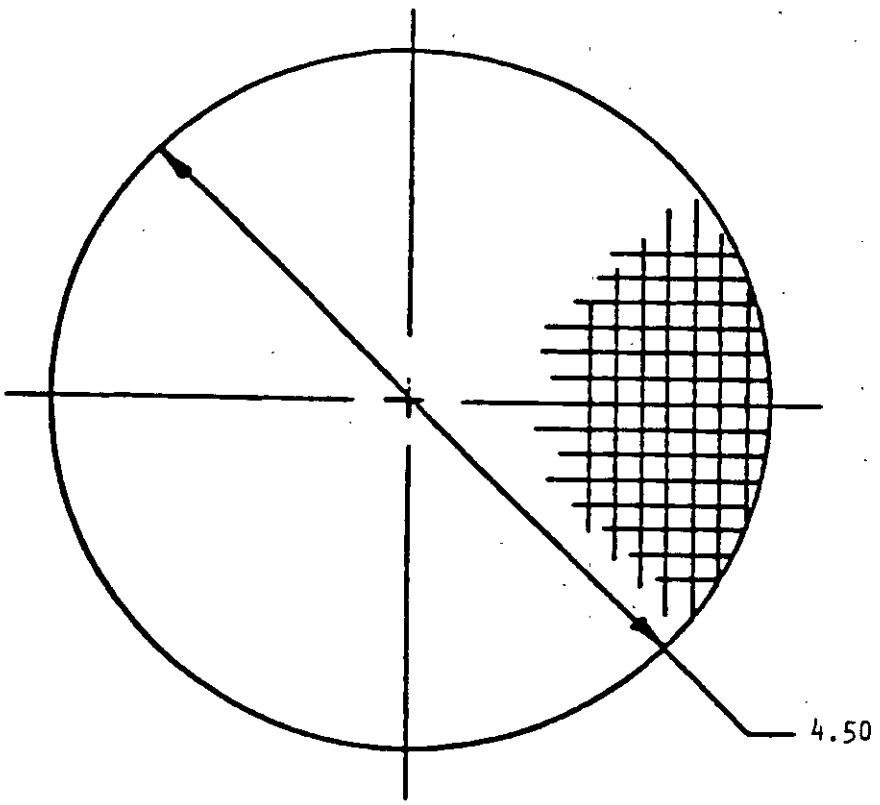


NOTES:

1. MATERIAL: WIRE CLOTH, TYPE I, CLASS 1, 4 x 4 MESH, 0.0348 DIAMETER, SPEC RR-W-360.
2. DIMENSIONS ARE IN INCHES.

FIGURE 4A. Screen.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

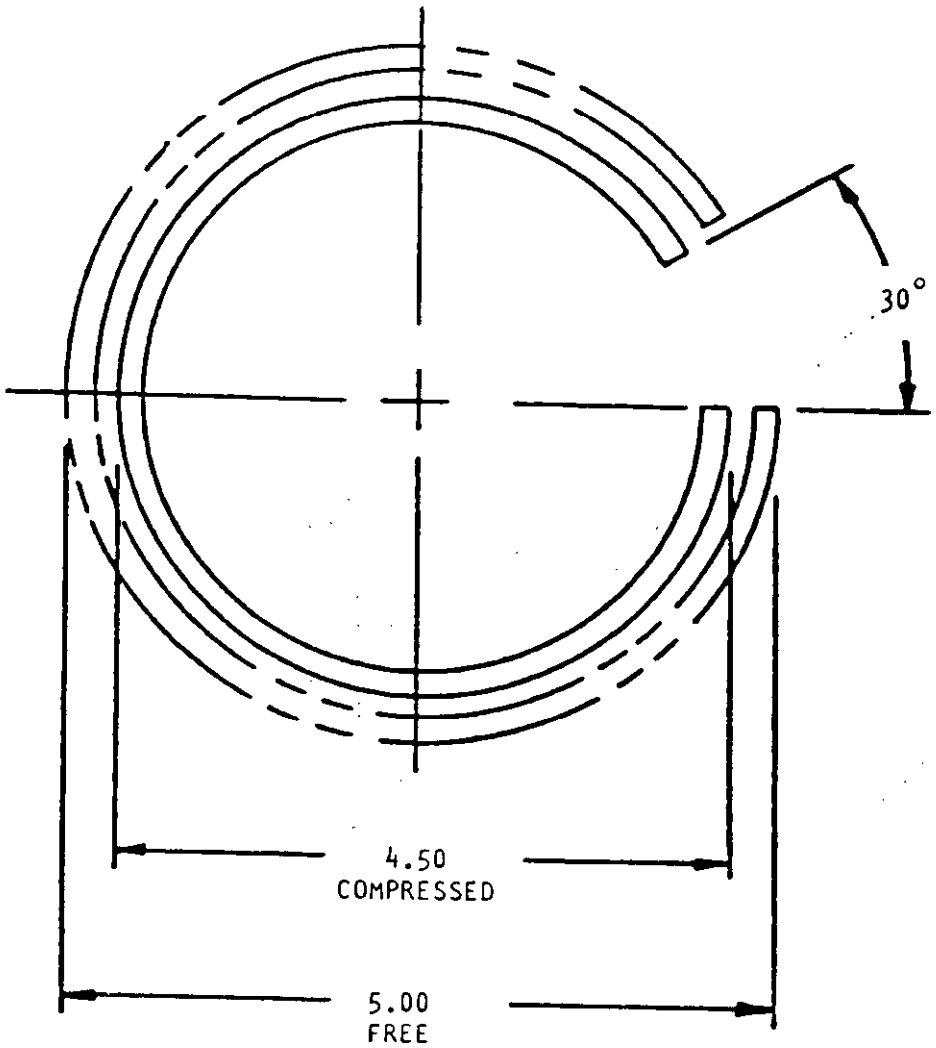

NOTES:

1. MATERIAL: WIRE, STEEL, MUSIC, 0.156 DIAMETER, SPEC QQ-W-470.
2. DIMENSIONS ARE IN INCHES.

FIGURE 4B. Spring retainer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.