MIL–C–46747
25 JANUARY 1963

SUPERSEDING
DAPD–561
11 MAY 1961

MILITARY SPECIFICATION

CARRIER, CARGO, AMPHIBIOUS: M116, PROCESSING FOR STORAGE AND SHIPMENT OF

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 Scope. This specification covers processing of the M116 Amphibious Cargo Carrier for storage outside of buildings, for immediate use shipment, and for domestic or overseas shipment, including carloading; meeting the requirements of levels A, B, and C preservation (see 1.2).

1.2 Classification. Processing shall be in the following levels as specified (see 6.1):

Level A	— Processing for domestic or oversea shipment and any storage outside of buildings in excess of 90 days from date of processing (periodic care and preservation during storage required).
Level B and C	— Limited processing for immediate use shipment and for domestic or oversea shipment (excluding open deck loading) and any storage not to exceed 90 days from date of processing.

701042—63—(161)

2. APPLICABLE DOCUMENTS

2.1 The following documents of issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

O–A–548	— Antifreeze, Ethylene Glycol, Inhibited.
O–I–490	— Inhibitor, Corrosion, Liquid Cooling System.
O–S–576	— Sodium Bicarbonate, Technical Grade.
GG–T–250	— Tester, Antifreeze Solutions.
NN–P–515	— Plywood, Container Grade.
QQ–S–781	— Steel Strapping, Flat.
RR–C–440	— Cloth, Wire, Industrial.
TT–E–529	— Enamel, Alkyd, Semi-Gloss.
UU–P–268	— Paper, Kraft, Untreated, Wrapping.

FSC 2320

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

UU-P-271 — Paper, Wrapping, Waterproofed Kraft.

UU-T-106 — Tape, Pressure-Sensitive Adhesive, Masking, Paper.

ZZ-T-416 — Tire Rebuilding and Tire and Tube Repair Materials.

PPP-B-636 — Box, Fiberboard.

PPP-B-640 — Boxes, Fiberboard, Corrugated, Triple, Wall.

PPP-C-843 — Cushioning Material, Cellulosic.

PPP-T-60 — Tape, Pressure-Sensitive Adhesive, Waterproof—for Packaging and Sealing.

MILITARY

MIL-P-116 — Preservation, Methods of.

MIL-B-117 — Bags and Sleeves, Interior Packaging.

MIL-B-121 — Barrier Material, Greaseproofed, Waterproofed, Flexible.

MIL-S-207 — Sulfuric Acid, Electrolyte: Packaging, Packing, and Marking for Shipment and Storage of.

MIL-C-450 — Coating Compound, Bituminous, Solvent Type, Black.

MIL-L-644 — Lubricating Oil, General Purpose, Preservative (Water-Displacing, Low Temperature).

MIL-G-3056 — Gasoline, Automotive, Combat.

MIL-G-10924 — Grease, Automotive and Artillery.

MIL-C-11755 — Compound, Antifreeze, Arctic-Type.

MIL-P-12841 — On Vehicle Equipment (OVE) for Military Vehicles, Packaging of.

MIL-P-13983 — Paint, Temporary, Lusterless, Gasoline Removable.

MIL-P-14232 — Parts, Equipment and Tools for Ordnance Materiel, Packaging of.

MIL-L-14486 — Lacquer, Vinyl Resin, Semi-Gloss.

MIL-C-16173 — Corrosion Preventive Compound, Solvent Cutback, Cold-Application.

MIL-C-16555 — Coating Compound, Strippable, Sprayable.

MIL-L-21260 — Lubricating Oil, Internal-Combustion Engine Preservative.

STANDARDS

MILITARY

MIL-STD-129 — Marking for Shipment and Storage.

MIL-STD-647 — Packaging Standards, Preparation and Use of.

DRAWINGS

ORDNANCE CORPS

10908545 — Closure Kit, Vehicle Protective-M116.

PUBLICATIONS

PACKAGING DATA SHEET

MS-35000-1 (6140-057-2553)—Battery, Dry Charged Storage, Type 2HN.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASSOCIATION OF AMERICAN RAILROADS

Sections 1 and 6 of Rules Governing the Loading of Commodities on Open Top Cars.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago 5, Ill.)

Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

3. REQUIREMENTS

3.1 Level A.

3.1.1 *First production processed vehicle.* Unless otherwise specified, the first production processed vehicle shall be subjected to inspection specified in 4.3. Approval of the first production processed vehicle shall not relieve the contractor of his obligation to process all vehicles in accordance with this specification. Except as otherwise specified by the procuring activity, any changes to materials or design after approval of first production processed vehicle, shall require submission of an additional production processed vehicle to the inspection specified in 4.2.

3.1.2 *One of first 10 production processed vehicles.* After approval of the first production processed vehicle (see 3.1.1), one of the first 10 production processed vehicles shall be selected by the Government representative for inspection specified in 4.2.

3.1.3 *Materials.*

3.1.3.1 *Stock numbers.* Materials to be obtained through Government supply channels shall be ordered by stock numbers or specifications.

3.1.4 *Preparation prior to processing.* Except as otherwise specified herein, and to the maximum extent consistent with production efficiency, economy, and safe storage and shipment, vehicle shall be prepared for storage and shipment in a completely assembled condition after test runs, and completion and approval of all necessary repairs. Specified equipment shall be installed and all adjustments made so that vehicle may be operated, shipped, and placed into service with a minimum of delay.

3.1.4.1 *Processing records.* Records of vehicle processing shall be maintained and shall be readily available for review by the Government inspector.

3.1.5 *Cleaning and drying.*

3.1.5.1 *Interior of vehicle.* Vehicle interior surfaces shall be cleaned in accordance with process C–1 of MIL–P–116, except that no liquids under pressure shall be used, and shall be dried by any applicable procedure specified therein.

3.1.5.1.1 *Battery supports and retainers.* Battery supports and retainers shall be cleaned with a solution composed of ½ pound of sodium bicarbonate, conforming to Specification O–S–576, per gallon of water, and shall be flushed with clear water and dried. Battery supports and retainers shall be coated with compound conforming to Specification MIL–C–450.

3.1.5.1.2 *Backrests, crash pads, and seats.* Installed backrests, crash pads, and cushioned components of seats shall be washed with a solution of soap and water, rinsed with clear water, dried, and immediately packaged (see 3.1.16).

3.1.5.2 *Exterior of vehicle.* Vehicle exterior surfaces shall be cleaned in a manner which will assure removal of all foreign matter; including excess cleaning materials, and shall be thoroughly dried. Vehicle shall be cleaned without directing steam or water jet at or above the water tight level. Caution shall be exercised to prevent the entry of water into vehicle.

3.1.6 *Repainting.* Interior and exterior painted surfaces which have damaged or defective paint film shall be cleaned and then repainted using materials of the same type, quality, and color as originally specified. Prior to painting with spray equipment, items which are to remain unpainted or which could be damaged by paint overspray, such as grease fittings, couplings, glass and rubber surfaces, shall be masked. After installation of equipment, paint repairs in driver's compartment shall be accomplished without the use of spray equipment. After paint repairs all masking tape and excess tape residue shall be removed.

3.1.7 *Relubrication.* After cleaning, including steam cleaning, has been accomplished, vehicles which have been operated in excess of 50

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

miles shall be relubricated using materials in accordance with drawings, specifications, or lubrication order pertinent to the vehicle. All exposed oil can points such as; levers, locking wing nuts, latches, door locks, hand-operated locking knobs, linkage, bar strikers, hinges, hinge pins, locking pins, pintle pins, locking levers, and threaded ends of yokes and related clevis pins shall be lubricated with lubricating oil conforming to MIL–L–644. Excess lubricating material shall be removed after lubrication.

3.1.8 *Transmission and steer units.* Transmission shall contain preservative oil only conforming to grade 1 of MIL–L–21260, filled to operating level. Steer units shall contain preservative oil conforming to grade 1, 2, or 3, as applicable, of MIL–L–21260 filled to operating level. DD Form 1397 (see 3.1.21) shall be completed to indicate grade of preservative oil used.

3.1.9 *Engine crankcase.* Engine crankcase shall contain preservative oil only, conforming to grade 1, 2, or 3, as applicable, of MIL–L–21260, filled to operating level. DD Form 1397 shall be completed to indicate grade of preservative oil used.

3.1.10 *Engine preservation.*

3.1.10.1 *Preservation through fuel system and carburetor.* A container, with two compartments, shall have one compartment filled with lubricating oil conforming to MIL–L–644, and the other compartment filled with a mixture of gasoline conforming to MIL–G–3056 and lubricating oil conforming to MIL–L–644. Mixture shall consist of 1 quart of oil to every 5 gallons of gasoline. The container shown in figure 1 has proven satisfactory for engine preservation. The shut-off valve at fuel filter in engine compartment shall be closed. Fuel line shall be disconnected at the quick disconnect below the solenoid valve in the engine compartment. The solenoid valve is accessible through the engine access opening in the cargo compartment. Heater switches shall be turned to the OFF position. Container selector valve shall be turned to the FUEL AND OIL position. Engine shall be started and operated at 1200 rpm without load, until running smoothly, but for not more than 4 minutes, then accelerated to 2500 rpm for 2 minutes. Fuel supply to the heater shall be shut off. The container selector valve shall be turned to the OIL position. At the instant the engine begins to misfire due to oil entering combustion chambers, the ignition switch shall be turned to the OFF position. The container lines shall be disconnected and the vehicle fuel lines reconnected. Fuel filters shall be drained.

3.1.10.2 *Preservation through spark plug openings.* After preservation as specified in 3.1.10.1, engine shall be cooled for 24 hours to assure that cylinder-head temperature does not exceed 100°F before engine preservation is continued unless thermal instrumentation indicates that a temperature of 100°F or less, measured at spark plug gasket surfaces of all cylinders, can be obtained in a lesser period. Induced air currents or flushing cold water through cooling system may be used to accelerate cooling of engine. Spark plugs shall be removed. While the engine is being cranked with the starting motor, a quantity of preservative oil conforming to grade 2 of MIL–L–21260 shall be atomized sprayed through each spark plug hole to assure complete coverage of all surfaces within the combustion chamber. Unless a greater quantity is required to effect complete coverage, the amount of preservative used shall not exceed 1 ounce per cylinder per application. After completion of the above application and without cranking the engine, the above procedure shall be repeated for each cylinder. Equipment shown in figures 2 and 3 have proved satisfactory for engine preservation. A red warning tag, bearing the information ENGINE PRESERVED FOR STORAGE; DO NOT CRANK, shall be securely attached in a conspicuous location within the driver's compartment. DD Form 1397 shall be completed to indicate grade of preservative oil used. Female threads of spark plug ports shall be coated with preservative oil conforming to grade 2 of MIL–L–21260, and spark plugs shall be reinstalled.

3.1.11 *Fuel tank.* Fuel tank shall be drained to the extent possible by removing drain plug at each end of tank. Drain plug shall be reinstalled after draining. Tank shall be filled to maximum capacity with preservative oil conforming to grade 2 of MIL–L–21260, drained until flow ceases and the drain plugs then reinstalled. Fuel

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

tank cap and filter screen shall be removed, coated with preservative oil, conforming to MIL–L–21260, and then reinstalled. The drained preservative oil may be reused for processing other gasoline fuel tanks, provided that less than 10 percent of the resultant fluid is gasoline when tested as specified in 4.5.2.4.

3.1.12 *Cooling system.* Prior to, or concurrently with the other preservation requiring engine operation, cooling system shall be protected by one of the following procedures, depending on the condition of shipment and storage, as specified (see 6.1). If no procedure is specified, cooling system shall be protected in accordance with 3.1.12.1. DD Form 1397 shall be completed to indicate coolant used.

3.1.12.1 *Water and antifreeze procedure.* Cooling system shall contain a clean solution consisting of equal parts by volume of antifreeze (ethylene glycol) conforming to type I of Specification O–A–548, and water, filled to capacity. Engine shall be operated to assure coverage of all interior parts and surfaces. Engine shall be operated until a temperature has been reached that causes the thermostat to open to assure complete mixing and even distribution of the antifreeze solution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH WATER AND ANTIFREEZE SOLUTION (ETHYLENE GLYCOL) IN EQUAL PARTS BY VOLUME—DO NOT DRAIN", shall be securely attached to radiator filler neck. When tested as specified in 4.5.2.3 coolant shall show protection to minus 40°F.

3.1.12.2 *Antifreeze compound procedure.* For shipment and storage in areas where the temperature drops below minus 40°F., cooling system shall be filled with antifreeze compound conforming to MIL–C–11755. The compound shall be used without dilution. A warning tag, bearing the information "COOLING SYSTEM FILLED WITH ANTIFREEZE (ARCTIC-TYPE)—DO NOT DRAIN" shall be securely attached to radiator filler neck.

3.1.12.3 *Water and corrosion inhibitor procedure.* For shipment and storage within the bounds of 30 degrees north latitude and 30 degrees south latitude, except Continental United States, cooling system shall be preserved as follows. Cooling system shall be filled with clear water up to, but not including, the radiator upper tank. A corrosion inhibitor conforming to Specification O–I–490 shall be added in the proportion of 5 ounces of the inhibitor for each 10 quarts of water. The inhibitor shall be dissolved in 2 quarts of warm water and poured into the radiator while the engine is idling. More water shall be added, if necessary, to fill the radiator to operating level. A warning tag, bearing the information "COOLING SYSTEM DOES NOT CONTAIN ANTIFREEZE—FILLED WITH WATER AND INHIBITOR", shall be securely attached to radiator filler neck.

3.1.13 *Drive belts.* Tension shall be released on all drive belts. A red warning tag bearing the following information shall be secured in a conspicuous location on the instrument panel: "TENSION RELEASED ON DRIVE BELTS —TIGHTEN BEFORE STARTING VEHICLE."

3.1.14 *Batteries, electrolyte, and cables.*

3.1.14.1 *Dry charge batteries and cables.* The vent holes in the filler cap of dry charge batteries shall be plugged or sealed. Positive battery cables shall be taped to the battery-to-ground cable with tape conforming to type III, class 1 of Specification PPP–T–60. Dry charge batteries shall be packaged and packed in accordance with the level A requirements of Packaging Data Sheet MS–35000–1 (6140–057–2553). Instructions for activation of batteries shall be packed with the battery. Dry charge batteries shall be stowed with OVE and secured independently in a manner to prevent movement and damage in transit.

3.1.14.2 *Electrolyte.*

3.1.14.2.1 *Packaging.* Electrolyte shall be packaged and marked in accordance with the requirements prescribed for type IV, class 1 unit, or type IV, class 2 unit, as applicable of Specification MIL–S–207.

3.1.14.2.2 *Packing.* Packing of the required number of unit packages of electrolyte shall be in crate-type structures constructed with solid ends. Ends shall be of nominal 1-inch lumber. Slats of moisture-resistant plywood conforming

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

to type II of Specification NN–P–515, having a length to fit, 4 inches wide by ¼ inch thick shall form the sides. One slat is required per side. Each slat shall be secured to the solid crate ends with box-type 3d cement coated nails. The nails should be placed 1 inch from the slat side, 2 inches on center. Crate shall be banded with ¾ inch strapping conforming to type I, class B of Specification QQ–S–781. Strapping shall run lengthwise with the straps placed at the approximate center of slats, and crisscrossed at right angles over the solid ends. Corner protectors shall be used under the strapping. Electrolyte shall be stowed with OVE and secured independently in a manner to prevent movement and damage in transit. Electrolyte shall be stowed in a manner permitting easy removal at ports when special stowing is required by maritime regulations.

3.1.15 *Miscellaneous preservation.* Except as otherwise specified, all exposed, unpainted machined-metal surfaces on the interior of the vehicle shall be coated with grease conforming to MIL–G–10924. All exposed, unpainted machined-metal surfaces on the exterior of the vehicle, except tracks, shall be coated with preservative conforming to grade 1 of MIL–C–16173.

3.1.16 *Backrests, crash pads, and seats.* Immediately after cleaning (see 3.1.5.1.2), backrests, crash pads, and cushioned components of seats shall be covered with paper having a minimum basis weight of 60 pounds, conforming to grade B of Specification UU–P–268. Paper shall be secured with tape conforming to type I of Specification UU–T–106.

3.1.17 *Hatches and doors.* Rubber seals around hatches and doors shall be coated with powdered talc conforming to type IV, class C of Specification ZZ–T–416. For shipment, hatches and doors shall be closed and locked. For storage, hatches and doors shall be closed and locked from the inside. Lock shall be packaged and packed. Pack shall be identified and stowed with OVE.

3.1.18 *Winch assembly.* Winch gear case and other gear driven units shall contain gear lubricant conforming to requirements of applicable lubrication order, filled to operating level. Wire cable shall be unreeled and all surfaces shall be coated with preservative conforming to grade 1 of MIL–C–16173. While cable is being rewound, any damage to the applied preservative coating shall be repaired by application of additional preservative to damaged areas. All exposed, unpainted metal surfaces of cable drums, controls and linkage shall be coated with preservative conforming to grade 1 of MIL–C–16173. All moving, mating surfaces shall be coated with grease conforming to MIL–G–10924.

3.1.19 *Fire extinguishers.* Fire extinguishers shall have a minimum of 90 percent or rated full charge. All seals shall be intact. WD Form 253 shall be completed and securely attached to the extinguisher (see 6.2).

3.1.20 *On vehicle equipment (OVE).* Except as otherwise specified, all spare parts, tools, equipment, and other unit packages shall be packaged in accordance with MIL–STD–647, MIL–P–14232 or applicable packaging data sheet. The packaged items shall be packed and marked in accordance with MIL–P–12841. Pack shall be identified to pertinent vehicle by serial number and, except during shipment, shall be stored inside buildings (see 3.1.24).

3.1.21 *Record forms.* A copy of "The Equipment Log Book" consisting of Binder (FSN 7510–889–3494) with required forms, and two copies of "Processing and Deprocessing Record for Shipment, Storage and Issue of Vehicles and Spare Engines" DD Form 1397 (see 6.3) shall be furnished and completed with each vehicle. Instructions for preparation and attachment or location of "The Equipment Log Book" shall be supplied by the Government representative. The log book shall be placed in an envelope, separately or with such other contract required forms or records, conforming to type II, class b of MIL–B–117. Envelope shall be closed by stapling. One copy of DD Form 1397 shall be placed in an envelope conforming to type I, class e of MIL–B–117. Envelope shall be closed by stapling and secured to headlamp with tape conforming to type III, class 1 of Specification PPP–T–60. The duplicate copy shall be placed in the envelope with the log book.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

3.1.22 *Cab.* Windshield wiper arms and blades shall be removed, placed in an envelope conforming to type III, class b of MIL-B-117, and securely attached to steering column. Exposed surfaces of windshield wiper arm shaft and screws shall be coated with grease conforming to MIL-G-10924 and sealed with tape conforming to type III, class 1 of Specification PPP-T-60. Rear view mirror shall be removed, disassembled, wrapped in two layers of cushioning material conforming to type II, class B of Specification PPP-C-843 then overwrapped with paper, having a minimum basis weight of 60 pounds, conforming to grade B of Specification UU-P-268. Paper shall be secured with tape conforming to Specification UU-T-106. Wrapped rear view mirror shall be identified, stowed and secured in the dash compartment in a manner that will prevent movement in transit.

3.1.22.1 *Cab with hard-top (winter kit) cover.* Engine air inlet and outlet grilles shall be covered with one layer of barrier material conforming to class E3 or L4 of Specification UU-P-217, having a ½ by ½ inch reinforcement. Barrier material shall be sealed to vehicle with tape conforming to type III, class 1 of Specification PPP-T-60. All surfaces of tape and barrier material shall be oversprayed with coating compound conforming to MIL-C-16555.

3.1.22.2 *Cab with soft-top (summer kit) cover.* All quick release cab-to-chassis fasteners shall be released, and cab shall be removed. Entire bottom edge of cab shall be padded with 3 layers of cushioning material conforming to class B of Specification PPP-B-843. Material shall be secured in place with tape conforming to Specification UU-T-106. After loading OVE in the cargo compartment, cab shall be stowed atop the OVE boxes and shall be secured with two pieces of strapping over cab. Cab shall be protected from strapping by a minimum of 4 layers at all corners and two layers of all strapping contact areas with cushioning material conforming to type II, class B of Specification PPP-C-843, overwrapped, before installation, with paper having a minimum basis weight of 60 pounds conforming to grade B of Specification UU-P-268. Any other contact points of the cab with vehicle OVE boxes shall be protected in a similar manner. Heater tops, defroster duct openings, horn button, and quick-release openings shall be sealed with tape conforming to type III, class 1 of Specification PPP-T-60. The soft top shall be removed thoroughly dried, folded or rolled in a manner to avoid creasing of plastic windows, placed in a carton in conformance to Specification PPP-B-640. The carton shall be secured with ¾ inch wide by .023 inch thick strapping conforming to type I, class B, grade 2 of Specification QQ-S-781, stowed with the OVE in the cargo compartment and blocked to prevent movement in transit. Covered wagon-style vehicle closure (see 3.1.22.2.1) shall then be installed.

3.1.22.2.1 *Vehicle closure.* Vehicle shall be provided with covered wagon-style closure in accordance with attached Drawing 10908545, Closure Kit, Vehicle Protective-M116. Closure shall be fabricated, assembled and installed in accordance with the attached drawings. All sharp corners of framework and bows where cloth cover will make contact, such as corners of base of the frame, shall be cushioned with a ¾ inch minimum thickness of cushioning material conforming to Specification PPP-C-843, secured in place with tape conforming to type III, class 1 of Specification PPP-T-60. To lift vehicle for loading, cover shall be rolled away from front and rear bows to expose vehicle lifting eyes (see 6.1).

3.1.23 *Ventilation.* The transmission drain access plate and fuel tank drain access plates on underside of vehicle shall be removed. Unpainted surfaces of removed plates shall be preserved with corrosion-preventive compound conforming to grade 1 of MIL-C-16173 and placed in a box conforming to Specification PPP-B-636, identified, and stowed within vehicle in a manner to prevent movement in transit. The following information shall be stenciled on the exterior of vehicle "REMOVE SCREENS, INSTALL ACCESS PLATE AND GASKETS BEFORE VEHICLE OPERATION", using white or yellow paint conforming to MIL-P-13983. Stenciling shall be in characters a minimum of ¾ inch. Location of the preserved plates and gaskets shall be stenciled on the outside of the vehicle adjacent to the above information.

3.1.23.1 *Screens.* Screens constructed of wire cloth, 0.047-inch diameter, 4 by 4 mesh, conform-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

ing to type I, class 1 of Specification RR–C–440 shall be installed in access plate openings.

3.1.24 *OVE containers.* OVE containers shall be placed within cargo compartment. Each large wood box containing manufacturers' or depot OVE shall be secured with 1¼-inch strapping conforming to type I, class B of Specification QQ–S–781. Smaller OVE boxes shall be secured to the larger OVE boxes, or other applicable holding devices in interior of vehicle, with ¾-inch strapping conforming to the same type and class. Boxes shall be blocked, braced, and anchored in a manner to prevent any movement and damage to OVE or interior of vehicle during handling and shipment. Corner protectors shall be used under strapping.

3.1.25 *Track, road, and idler wheels.* All unpainted ferrous metal surfaces of track, road, and idler wheels shall be coated with preservative conforming to grade 1 of MIL–C–16173. Preservative shall be applied prior to loading the vehicle for shipment, or prior to or after placing the vehicle in storage. When it is necessary to move vehicle by towing during loading operation, additional application of preservative to contact surfaces of track will not be required.

3.2 Level B and C. Vehicles shall be processed in accordance with 3.1.1 through 3.1.12.3, 3.1.14, 3.1.15, and 3.1.17 through 3.1.25 with the following exceptions.

3.2.1 *Transmission and steer units.* Transmission and steer units shall contain lubricant in accordance with applicable drawings, specifications, or lubrication orders, filled to operating level; except when the units contain preservative oil conforming to grade 1, 2, or 3 as applicable, of MIL–L–21260, operating level shall be attained by the addition of the applicable grade of preservative oil. Operating lubricant and preservative oil shall not be mixed. DD Form 1397 shall be completed to indicate grade of lubricant or preservative oil used.

3.2.2 *Engine crankcase.* Engine crankcase shall contain lubricant in accordance with applicable drawings, specifications, or lubrication orders; or preservative oil conforming to grade 1, 2, or 3, as applicable, of MIL–L–21260, filled to operating level. Operating lubricant and preservative oil shall not be mixed. DD Form 1397 shall be completed to indicate grade of lubricant or preservative oil used.

3.2.3 *Fuel tank.* Except when otherwise specified (see 6.1), vehicles shall be shipped without draining residual fuel from the fuel tank.

3.2.4 *Hatches and doors.* For shipment, hatches and doors shall be closed and locked. For storage, hatches and doors shall be closed and locked from the inside. Lock shall be packaged and packed. Pack shall be identified and stowed with OVE.

3.3 Marking. In addition to any special marking required in the contract or order (see 6.1), vehicles and stowed equipment, as specified herein, shall be marked in accordance with MIL–STD–129.

3.3.1 *Lifting points.* The information "LIFT HERE" shall be stenciled at each lifting eye on the vehicle, using white enamel conforming to Specification TT–E–529. Stenciling shall be in characters a minimum of ½ inch high.

3.3.2 *Closure marking.* The information "TO LIFT VEHICLE FOR LOADING, UNFASTEN AND ROLL COVER FROM FRONT AND REAR BOWS EXPOSING LIFTING EYES", shall be stenciled in a conspicuous location on the front and rear of vehicle closure, using lacquer conforming to MIL–L–14486, except that color shall be white. Stenciling shall be in characters a minimum of ¾ inch high. The information "CLOSURE KIT, VEHICLE PROTECTIVE–M116—DO NOT DESTROY—REINSTALL FOR SHIPMENT OR STORAGE OR SHIP WITH OVE", shall be stenciled in a conspicuous location on one end and one side of vehicle closure, using lacquer conforming to Specification MIL–L–14486, except that color shall be white. Stenciling shall be in characters a minimum of 2 inches high.

3.3.3 *Marking for preserved engines.* Two red warning tags, bearing the information "DO NOT OPEATE ENGINE UNTIL PROVISIONS OF TB ORD 392 HAVE BEEN COMPLIED WITH" shall be provided. One tag shall be securely attached to the engine, and the other tag shall be located in a conspicuous location within driver's compartment.

3.4 Loading. Vehicle shall be blocked, braced, and anchored on open top railroad cars in ac-

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

cordance with "Sections 1 and 6—Rules Governing the Loading of Commodities on Open Top Cars" of the Association of American Railroads publication (see 2.2). Parking brake shall be set.

3.4.1 *Reprocessing engine after loading.* If engine is operated in connection with loading, or moving vehicle to loading area, the engine shall be reprocessed as specified in 3.1.10. An auxiliary fuel tank shall supply the fuel. If installed, vehicle cover shall be rolled back clear of engine intake and exhaust to provide air circulation and prevent damage to cover. After reprocessing of engine, vehicle cover shall be restored to its original position.

TABLE I. *Processing Inspection*
(See indicated paragraphs for Level A, Level B, and Level C requirements)

	Cleaning	Preservation		Packaging
	Levels A, B, and C	Level A	Levels B and C	Levels A, B, and C
Preparation prior to processing				3.1.4
Processing records				3.1.4.1
Interior of vehicle	3.1.5.1			
Battery supports and retainers	3.1.5.1.1			
Backrests, crash pads and seats	3.1.5.1.2			3.1.16
Exterior of vehicle	3.1.5.2			
Repainting		3.1.6	3.1.6	
Relubrication		3.1.7	3.1.7	
Transmission and steer units[1]		3.1.8	3.2.1	
Engine crankcase[1]		3.1.9	3.2.2	
Engine preservation[1]		3.1.10	3.1.10	
Preservation through fuel system and carburetor		3.1.10.1	3.1.10.1	
Preservation through spark plug openings[1]		3.1.10.2	3.1.10.2	
Fuel tank		3.1.11	3.2.3	
Cooling system[1]		3.1.12	3.1.12	
Water and antifreeze procedure		3.1.12.1	3.1.12.1	
Antifreeze compound procedure		3.1.12.2	3.1.12.2	
Water and corrosion inhibitor procedure		3.1.12.3	3.1.12.3	
Drive belts		3.1.13		
Dry charge batteries and cables		3.1.14.1	3.1.14.1	
Electrolyte		3.1.14.2	3.1.14.2	3.1.14.2.1 and 3.1.14.2.2
Miscellaneous preservation		3.1.15	3.1.15	
Hatches and doors		3.1.17	3.2.4	
Winch assembly		3.1.18	3.1.18	
Fire extinguisher				3.1.19
On vehicle equipment (OVE)	3.1.20	3.1.20	3.1.20	3.1.20
Record forms				3.1.21
Cab		3.1.22	3.1.22	
Cab with hard-top (winter kit) cover		3.1.22.1	3.1.22.1	
Cab with soft-top (summer kit) cover		3.1.22.2	3.1.22.2	
Vehicle closure				3.1.22.2.1
Ventilation		3.1.23	3.1.23	3.1.23
Screens				3.1.23.1
OVE containers				3.1.24
Track, road and idler wheels		3.1.25	3.1.25	
Marking				3.3
Lifting points				3.3.1
Closure marking				3.3.2
Marking for preserved engines				3.3.3
Loading				3.4
Reprocessing engine after loading				3.4.1

[1] Inspect DD Form 1397.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specifications where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First production and one of first 10 production processed vehicles. The first production processed vehicle (see 3.1.1), and one of the first 10 production processed vehicles (see 3.1.2) shall be subjected to inspection specified in 4.5 through 4.5.2.4.

4.3 Production processed vehicles. Except as otherwise specified, all production processed vehicles shall be subjected to inspection specified in 4.5 through 4.5.2.4.

4.4 Rejection. Failure of the first production, one of first 10, or any production processed vehicle to conform to the requirements of this specification shall be cause for rejection of the vehicle, and refusal to continue acceptance of vehicles, by the Government, until objective evidence has been provided, by the contractor, that corrective action has been taken to eliminate the conditions which caused rejection.

4.5 Inspection procedures.

4.5.1 *Materials.* Except for materials which have been Government inspected at the source, all materials to be used in processing of vehicles shall be inspected in accordance with the material specification; or certified inspection and laboratory test reports shall be furnished which show that materials, as furnished conform to the detail specification.

4.5.2 *Processing.* All vehicle processing shall be inspected to determine conformance to this specification. Inspection of processing shall include all items specified in table I, and 4.5.2.1 through 4.5.2.4.

4.5.2.1 *Cleaning.* To determine conformance to 3.1.5.1, interior of vehicles shall be examined for cleanliness, and one vehicle each day shall be tested for cleanliness in accordance with the applicable provisions of MIL–P–116. To determine conformance to 3.1.5.2, exterior of vehicle shall be examined for cleanliness. Surfaces to which tape is to be applied shall be examined for cleanliness before applying tape.

4.5.2.2 *Fuel tank.* To determine conformance to 3.1.11, interior of fuel tank shall be examined and visual inspection shall assure that complete processing, as specified, has been accomplished.

4.5.2.3 *Cooling system.* To determine conformance to 3.1.12.1, one vehicle from each day's production shall be selected at random and engine coolant shall be tested using a solution testing two-float hydrometer syringe conforming to Specification GG–T–250, with a range of minus 60°F. to plus 160°F.

4.5.2.4 *Fuel and oil mixture test.* The drained preservative oil from the fuel tanks of one out of every five vehicles shall be tested to determine conformance to 3.1.11. An American Petroleum Institute (API) hydrometer with thermometer, plus correction values for the temperature differential above or below the established base temperature, shall be used to measure dilution of preservative oil with fuel. Mixture shall be tested as follows:

(a) A test specimen consisting of 1 gallon of clean, unused preservative oil conforming to grade 2 of MIL–L–21260 shall be used as a standard for measuring the degrees of dilution of reused preservative oil. The clean, unused preservative oil shall be identified with a purity point of 0.0 percent dilution. A test specimen of 1 gallon of the drained preservative oil shall be tested with the hydrometer for a comparison of the purity points.

(b) The drained preservative oil shall not be reused when the test shows contamination of 10 percent or greater. A 10 percent contamination is indicated when the difference in purity

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

points tested at the same ambient temperature exceed 1.0 degrees API.

5. PREPARATION FOR DELIVERY

This section is not applicable to this specification.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.

(b) Selection of applicable level of processing (see 1.2).

(c) Selection of applicable procedure of protection of cooling systems (see 3.1.12).

(d) Fabrication, assembly, and installation instructions for covered wagon-style closure (see 3.1.22.2.1).

(e) If draining of residual fuel from fuel tanks is required (see 3.2.3).

(f) Additional special markings (see 3.3).

6.2 Safety precautions. Caution should be exercised in handling CO_2 fire extinguisher cylinders. Cylinders should not be dropped, permitted to strike each other, or be handled roughly. Extreme care should be exercised during the reinstallation operation to avoid tripping fire extinguisher control system (see 3.1.19).

6.3 Forms. A copy of "The Equipment Log Book" and all required forms will be furnished the contractor by the Government at least 30 days before shipment of the equipment as required by the contract delivery schedule (see 3.1.21).

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

TABLE II. *Stock Numbers*

Specification	Material or item	Size or quantity	Stock number
O-A-548	Antifreeze, permanent, ethylene glycol, inhibited	1 gal	6850-243-1992
		5 gal	6850-224-8730
		55 gal drum	6850-243-1990
O-S-576	Sodium bicarbonate, technical grade	1 lb	6810-264-6618
		100 lbs	6810-297-0092
QQ-S-781	Steel, flat, strapping	6.7 ft per lb	8135-285-4745
UU-P-268	Paper, kraft wrapping (grade B)	18 inch width	8135-160-7756
		24 inch width	8135-160-7757
		30 inch width	8135-160-7758
		36 inch width	8135-160-7759
		48 inch width	8135-160-7762
UU-T-106	Tape, pressure-sensitive adhesive	¼ inch width	7510-266-6713
	(type I, 60 yd roll)	½ inch width	7510-266-6714
	(type II, 60 yd roll)	1 inch width	7510-266-6712
		2 inch width	7510-266-6710
		3 inch width	7510-266-6707
		1 inch width	7510-290-0914
		1¼ inch width	7510-272-9463
		2 inch width	7510-290-0915
TT-E-529	Enamel, alkyd, semi-gloss	1 gal	8010-297-0584
ZZ-T-416	Tire rebuilding and tire and tube repair materials	1 lb can	6810-270-8173
	(type IV, class C)	2 lb can	6810-270-9990
		5 lb can	6810-270-9988

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

TABLE. *II. Stock Numbers—Continued*

Specification	Material or item	Size or quantity	Stock number
PPP–C–843	Cushioning material, cellosic	12¾ inch width	8135–132–9554
	(type III, class A, ¾ inch)	24¾ inch width	8135–132–9555
		38¼ inch width	8135–132–9556
	(type III, class A, 1 inch)	40 inch width	8135–132–9557
	(type III, class B, ½ inch)	20 inch width	8135–183–8815
PPP–T–60	Tape, pressure sensitive		Not available
	(type III, class 1) comparable to type I, grade B, 60-yd roll of Specification JAN–B–127)	1 inch width	8135–269–8088
		2 inch width	8135–269–8090
		4 inch width	8135–269–8092
		6 inch width	8135–269–8094
MIL–B–117	Bag, paper, kraft, waterproof flat bottom type, unbleached, length 8 inch, width 4 inch, type I or II class B	500	8115–271–8800
MIL–C–450	Coating compound, bituminous, black	1 gal	8030–290–5141
MIL–L–644	Lubricating oil, general purpose, preservative	1 qt	9150–231–6689
		55 gal dr 16 ga	9150–281–2007
		55 gal dr 18 ga	9150–281–2060
MIL–G–3056	Gasoline, automotive combat (type I)	5 gal	9130–160–1817
		55 gal dr 16 ga	9130–221–0680
		55 gal dr 18 ga	9130–240–8204
MIL–G–10924	Grease, automotive and artillery	1 lb can	9150–190–0904
		5 lb can	9150–190–0905
		35 lb pail	9150–190–0907
		100 lb drum	9150–190–0908
MIL–P–11520	Preservative coating, rubber, (type I)	1 gal can	8030–464–0597
		5 gal can	8020–664–0994
		55 gal drum	8050–543–4427
MIL–P–13983	Paint, gasoline removable	33538 (yellow)	Not available
		37875 (white)	8010–592–8238
MIL–C–16173	Corrosion preventive compound (grade 1)	1 gal can	8030–231–2845
		5 gal can	8030–231–2862
		55 gal dr	8030–231–2363
MIL–L–21260	Lubricating oil	5 gal dr	9150–264–3941
	(grade 1)	55 gal dr 16 ga	9150–292–9691
		55 gal dr 18 ga	9150–292–3942
	(grade 2)	5 gal dr	9150–264–3943
		55 gal dr 16 ga	9150–292–9693
		55 gal dr 18 ga	9150–264–3944
	(grade 3)	5 gal dr	9150–264–3945
		55 gal dr 16 ga	9150–264–3946
		55 gal dr 18 ga	9150–558–0820

Custodian:

Army—MO
Navy—MC

Preparing activity:

Army—MO

Project No. 2320–9065

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.


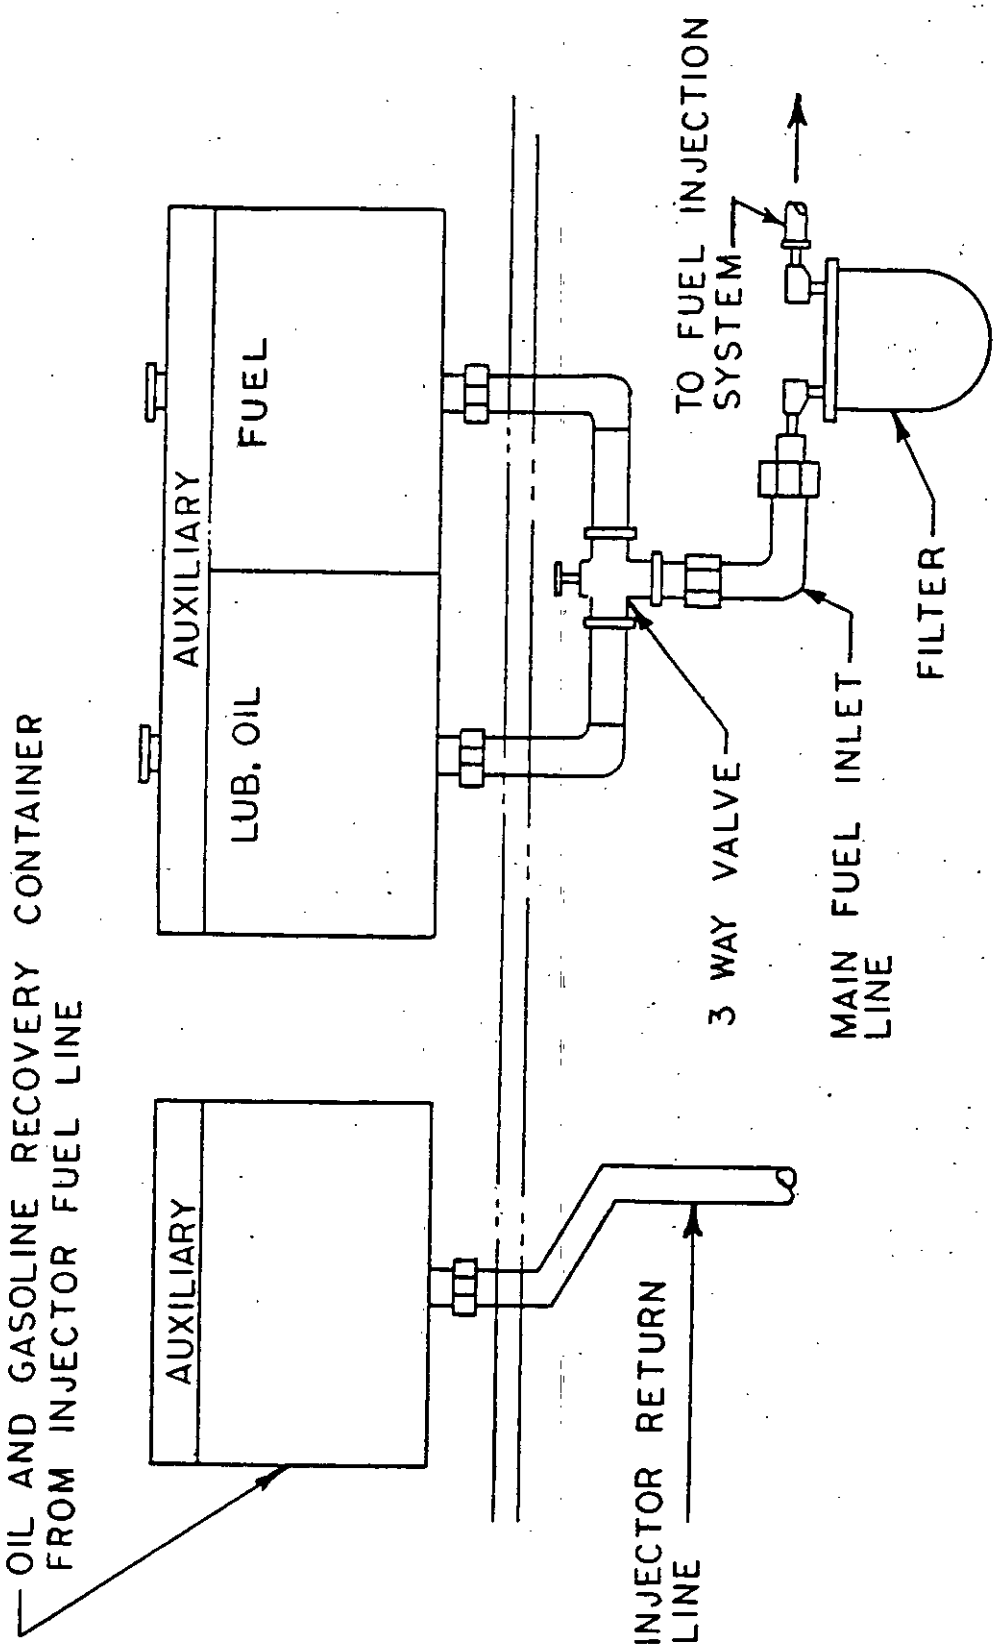


FIGURE 1. *Engine processing.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

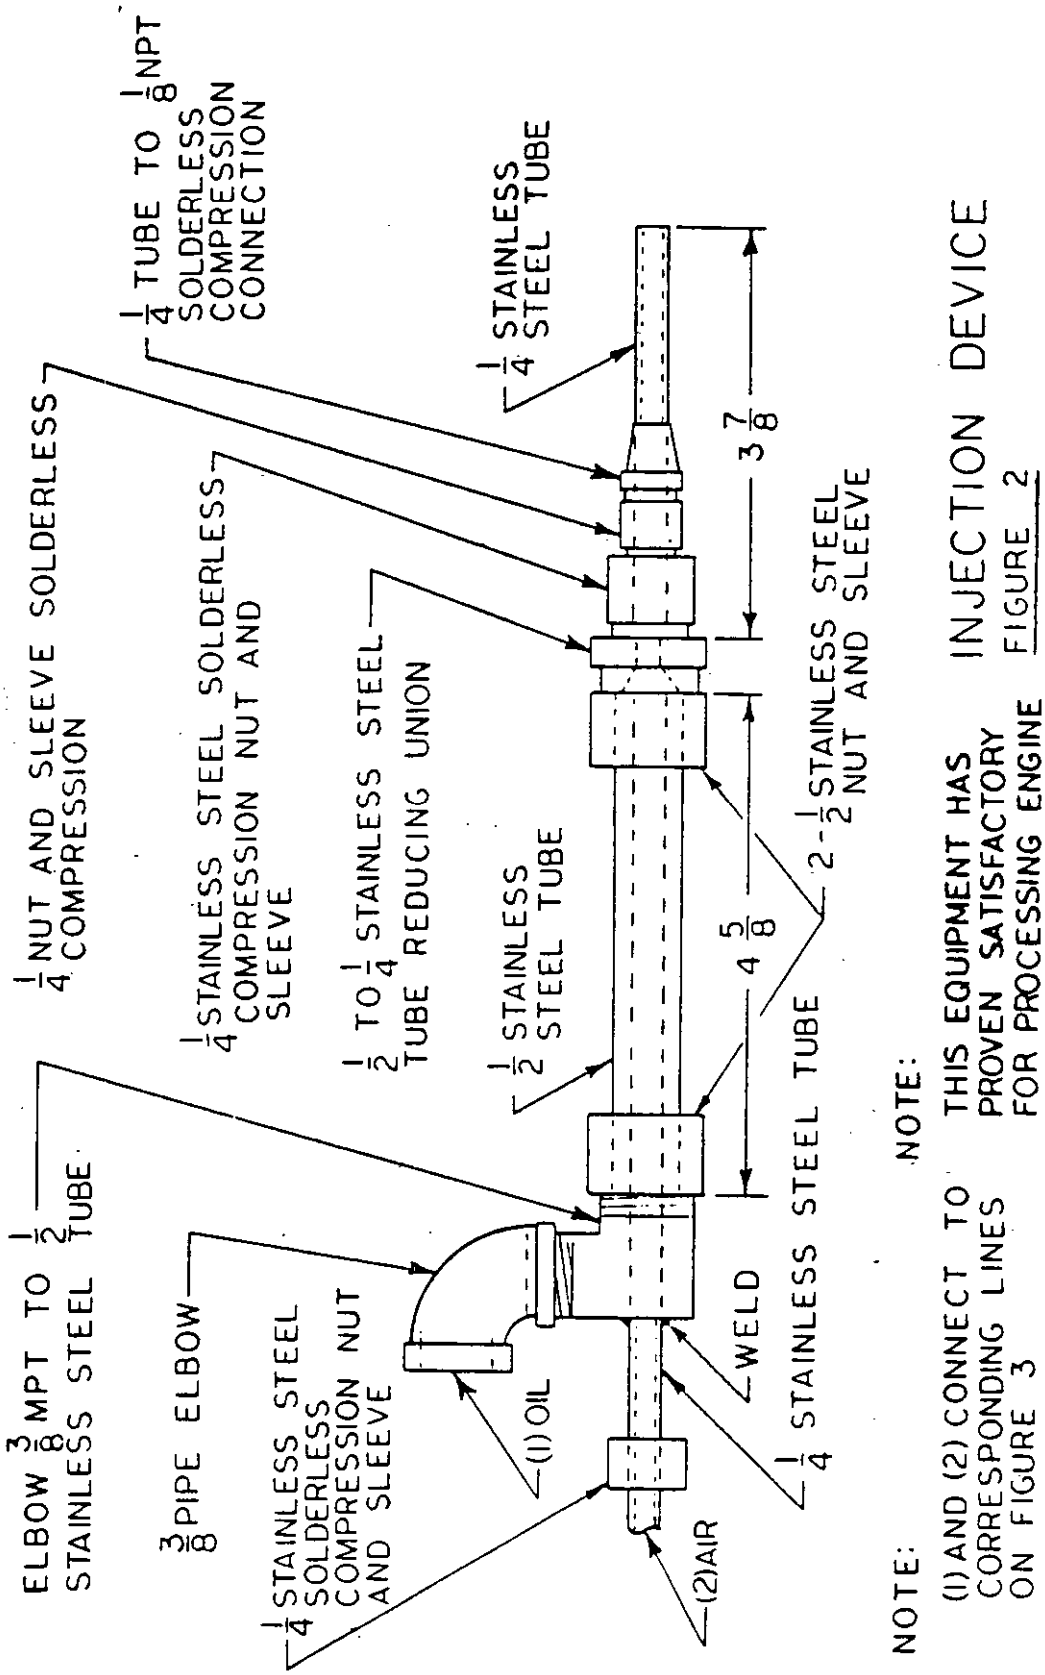


INJECTION DEVICE
FIGURE 2

Figure 2. *Injection device.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

1 AIR LINE
2 AIR PRESSURE REGULATOR
3 AIR PRESSURE GAGE
4 SOLENOID VALVE
5 MOISTURE SEPARATOR
6 OIL PRESSURE GAGE
7 TWO DOUBLE TAPED LINES
8 SOLENOID VALVE
9 OIL TANK LEVEL GAGE
10 ELECTRIC JUNCTION BOX
11 ELECTRIC LINE
12 MOTOR 1/4 H.P.
13 SHAFT
14 POSITIVE DISPLACEMENT OIL PUMP
15 OIL TANK

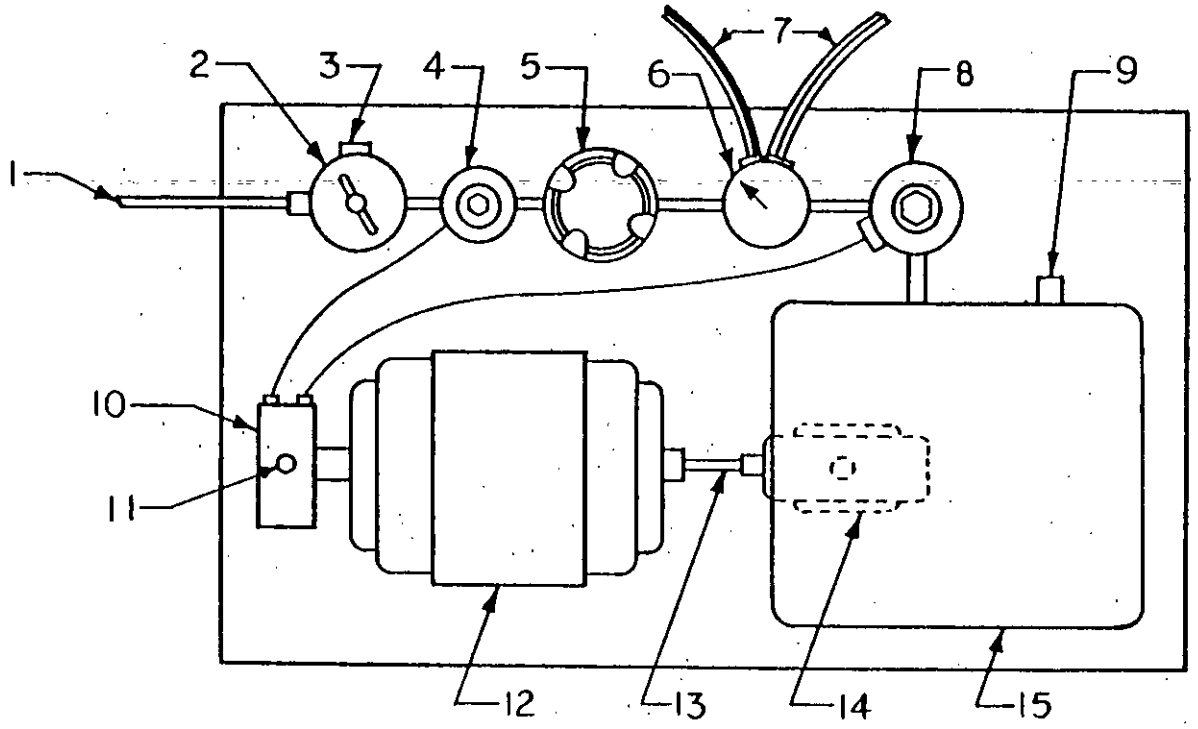

NOTE:
THIS EQUIP. HAS PROVEN SATIS. FOR PROCESSING ENG. THRU SPARK PLUG OPENINGS IN CONJ. WITH FIG. 2

FIGURE 3. *Pressure pump.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

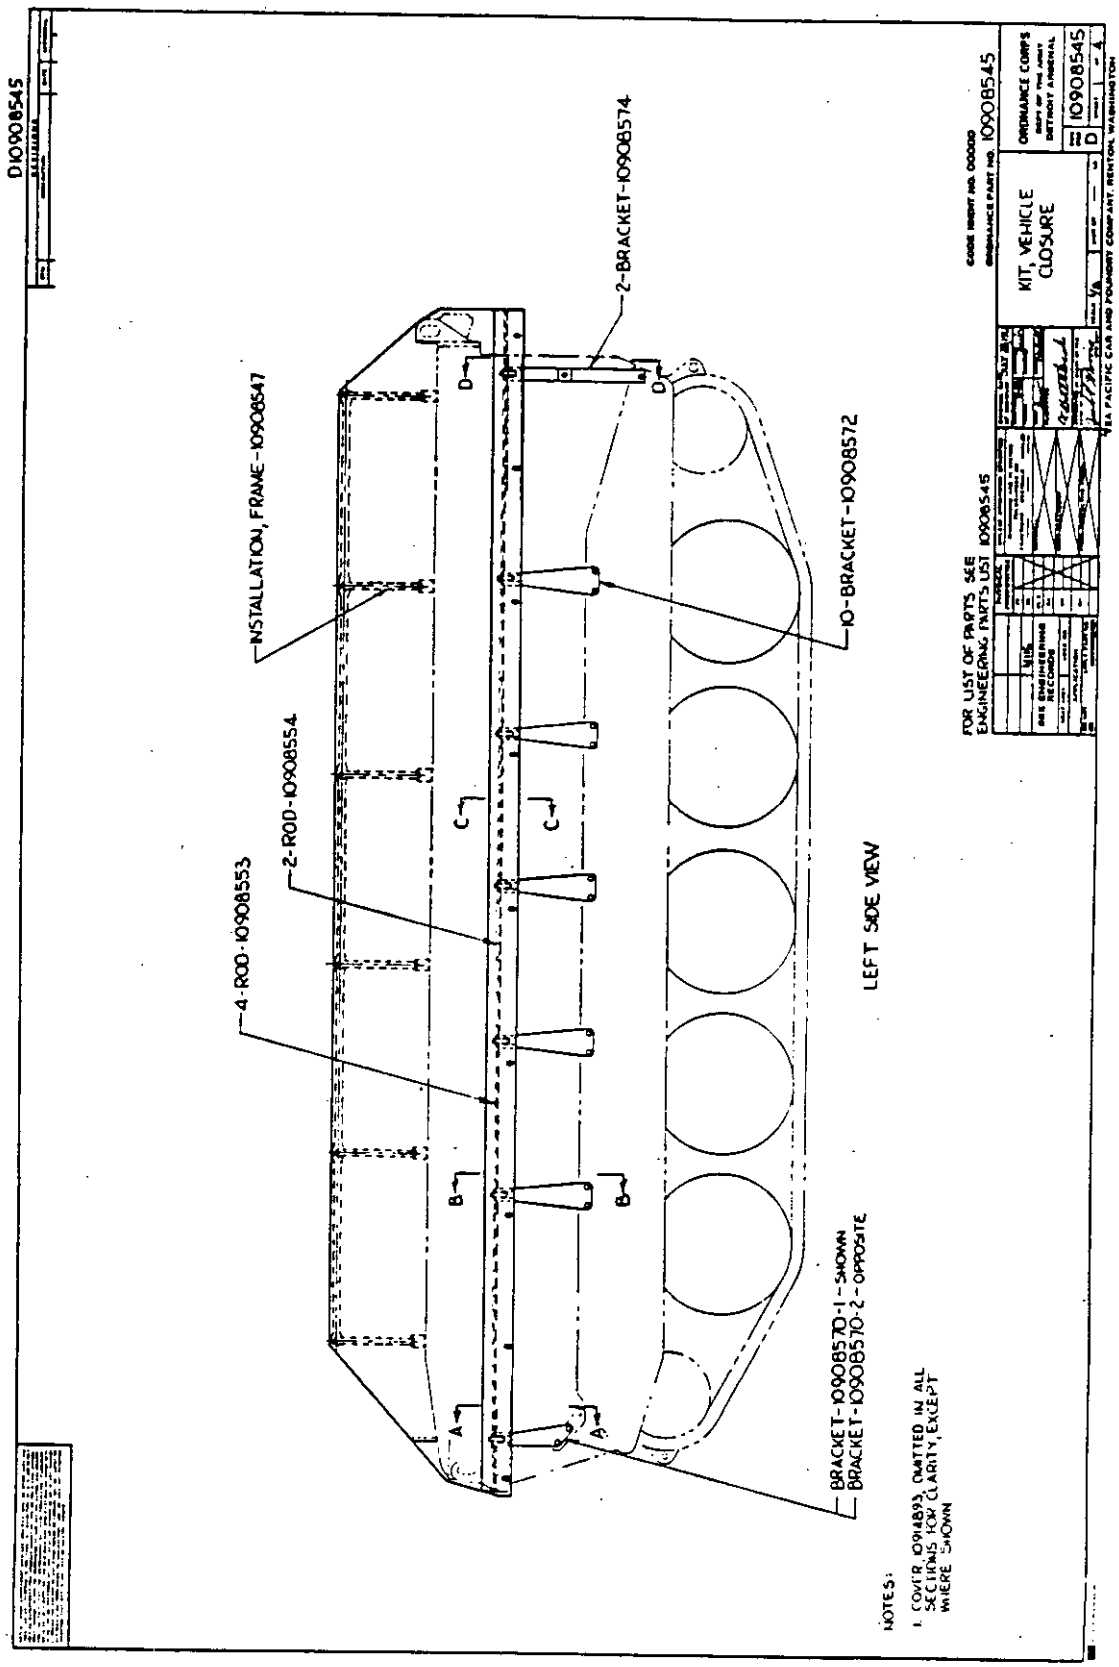


FIGURE 4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

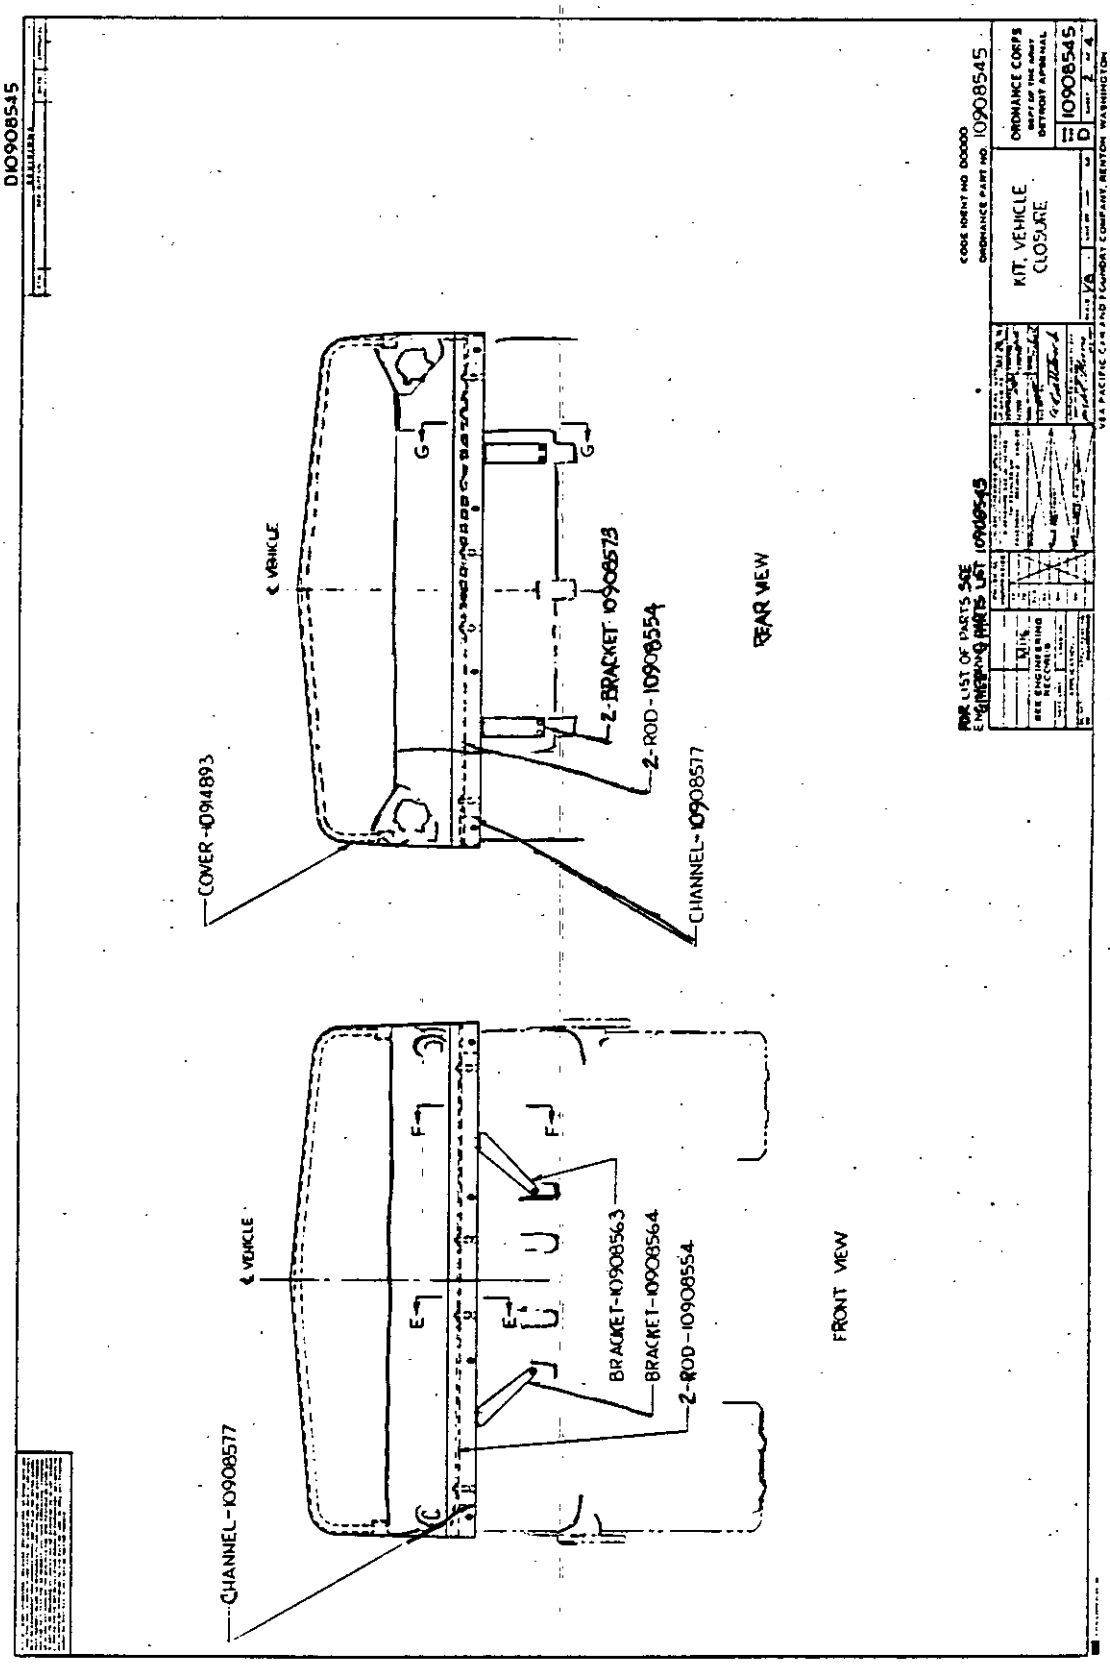


FIGURE 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

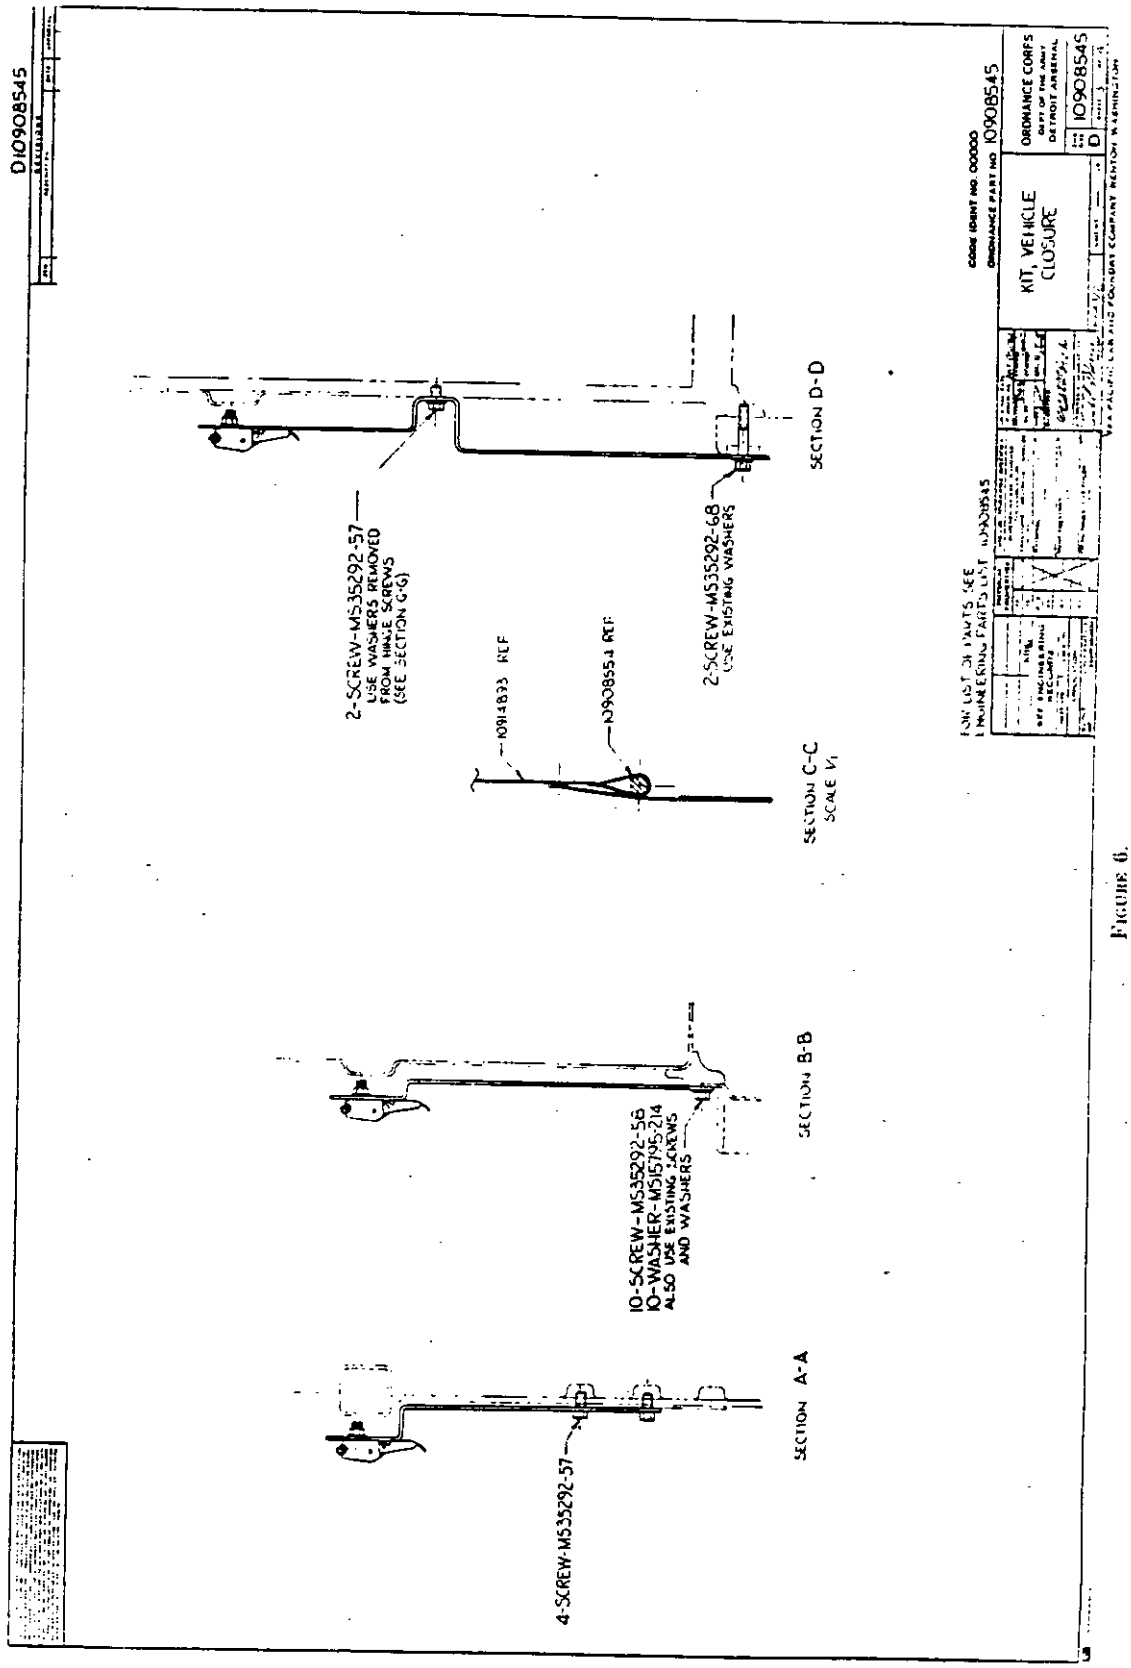


FIGURE 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

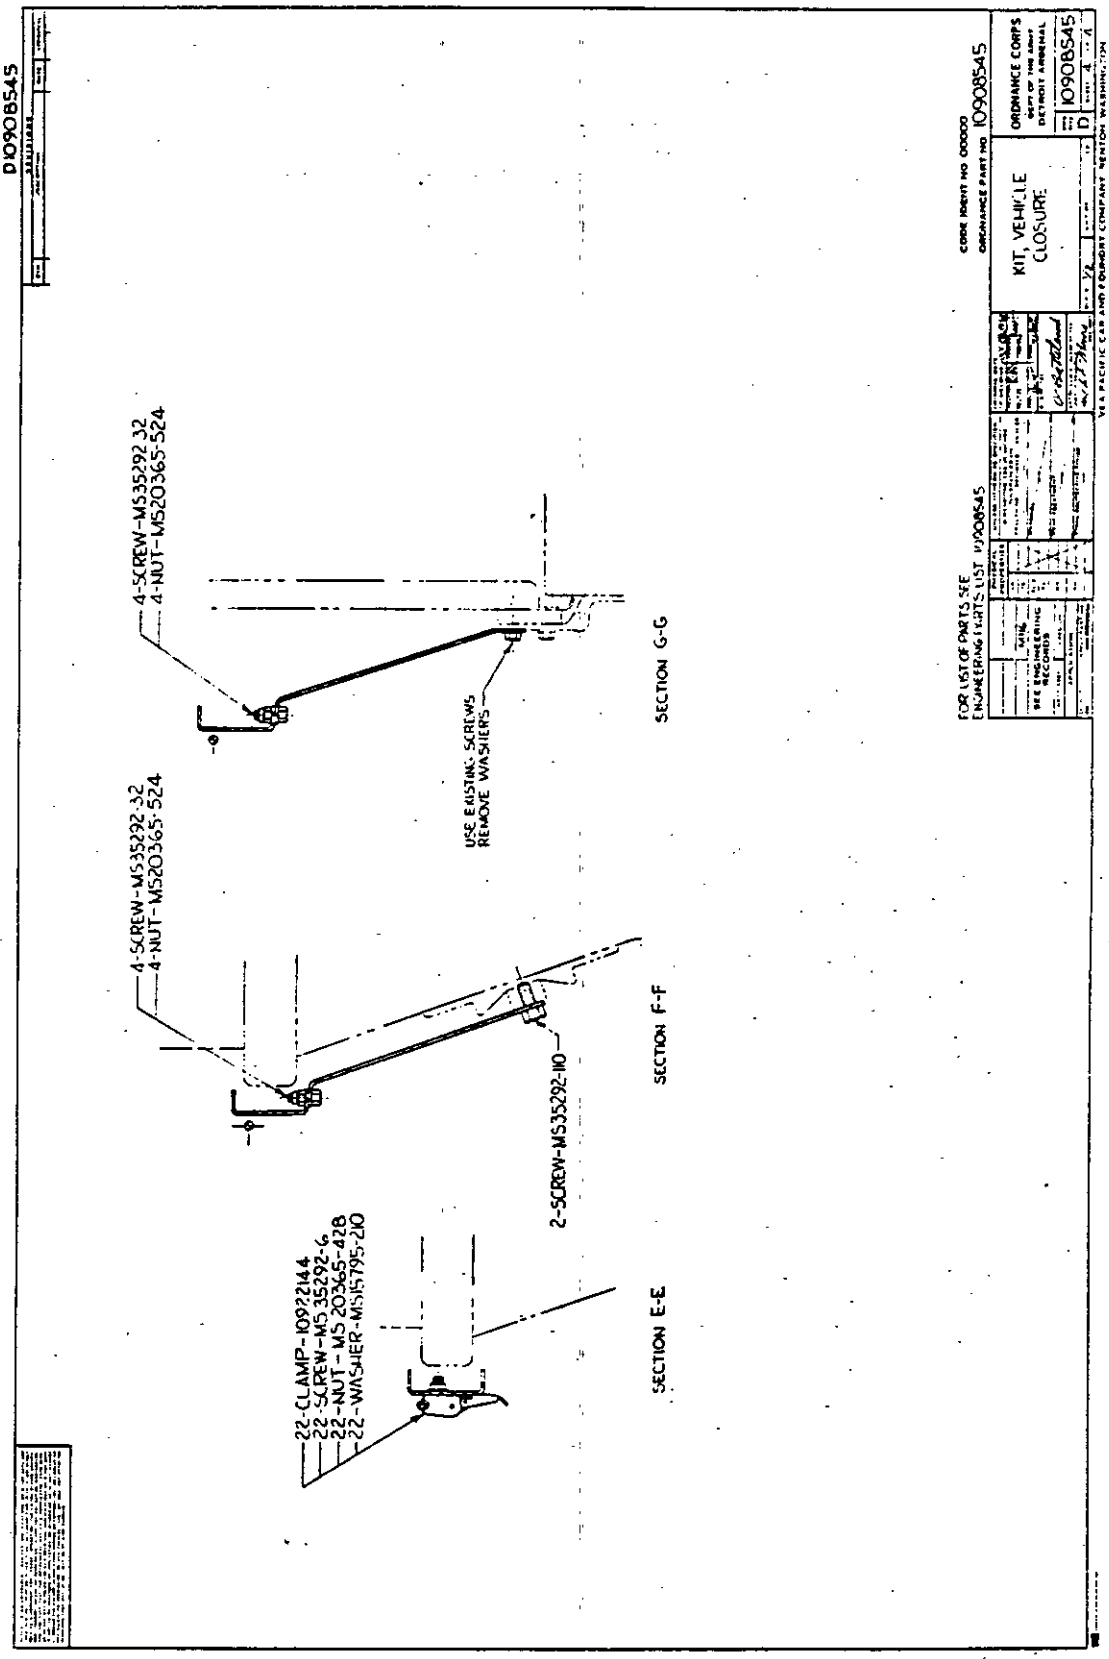


FIGURE 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

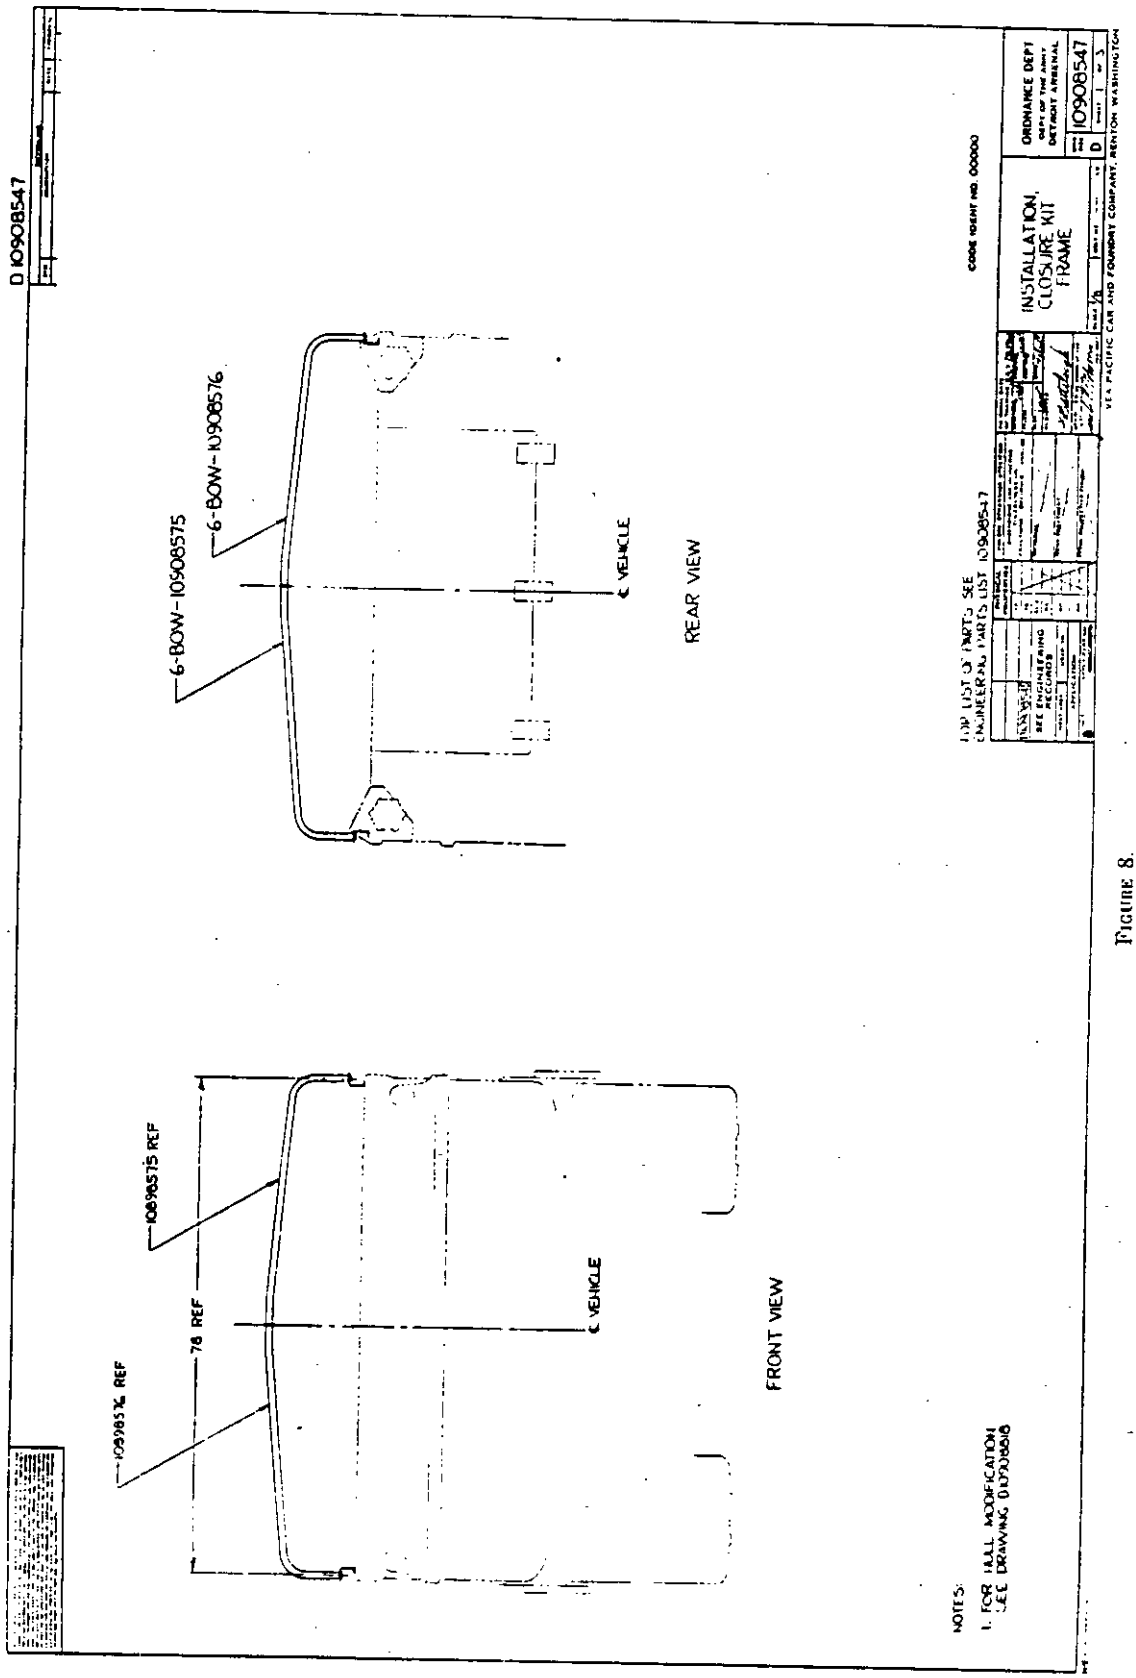


Figure 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

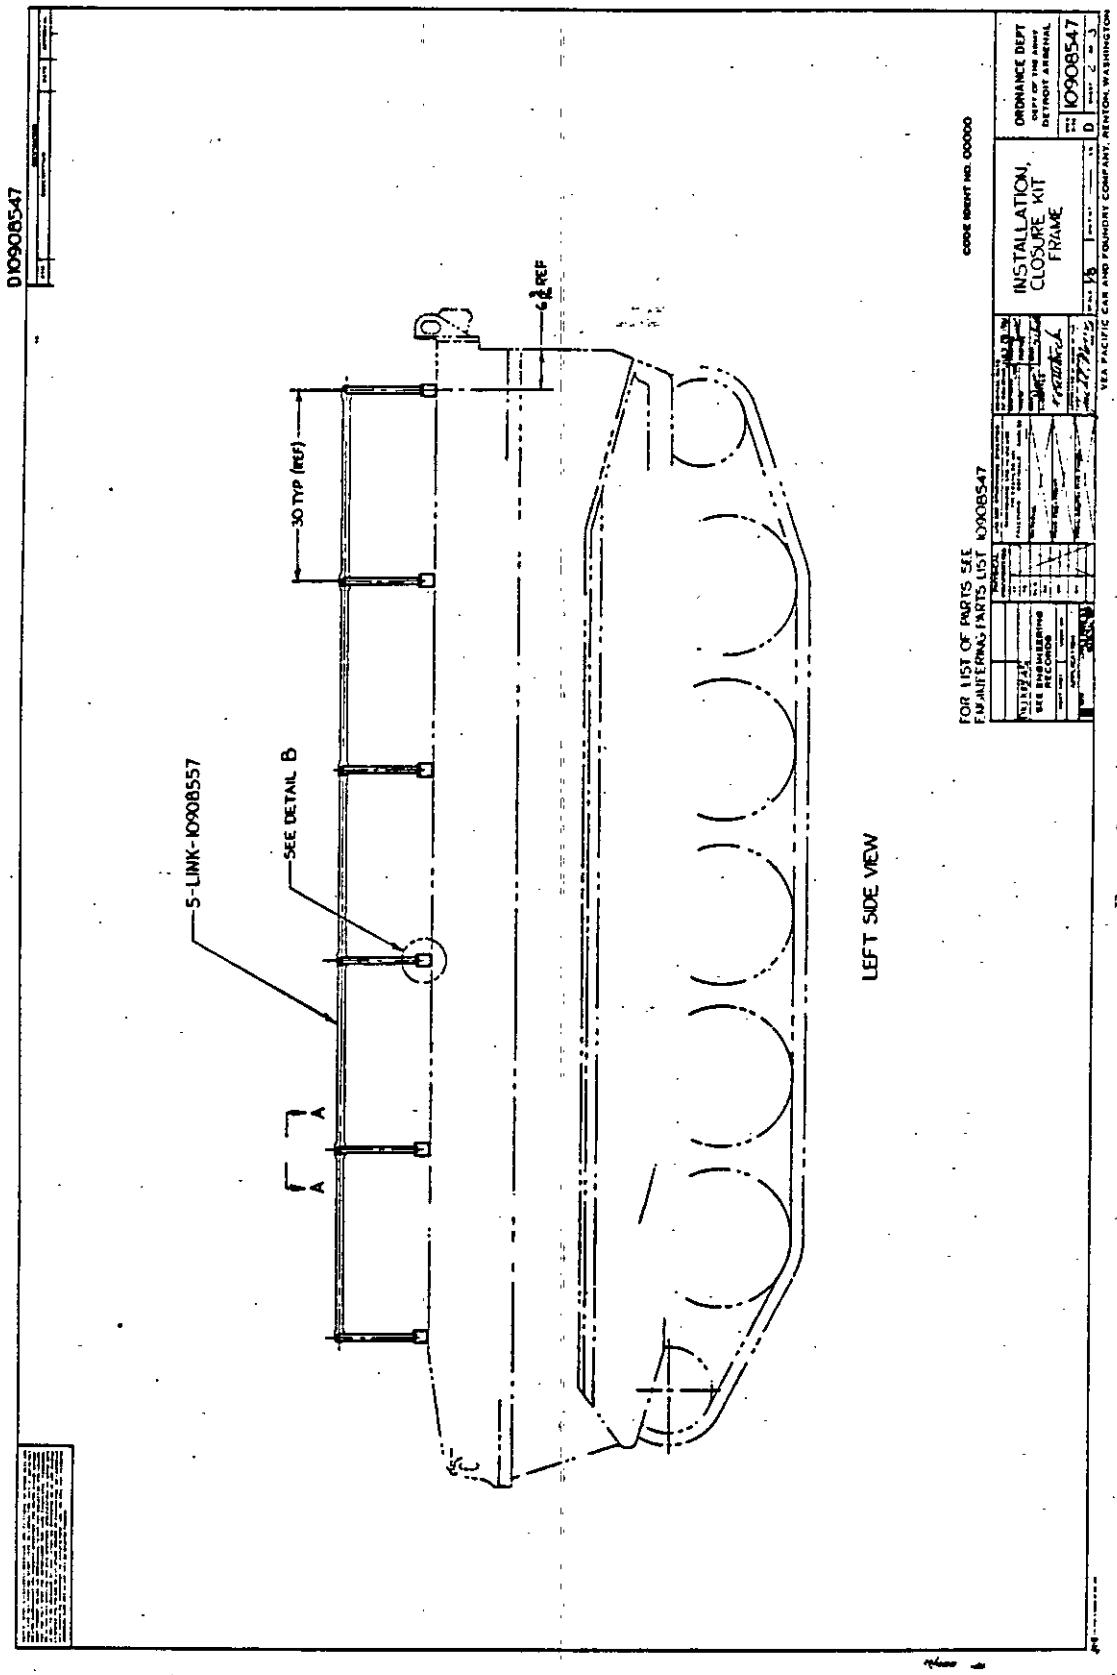


FIGURE 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

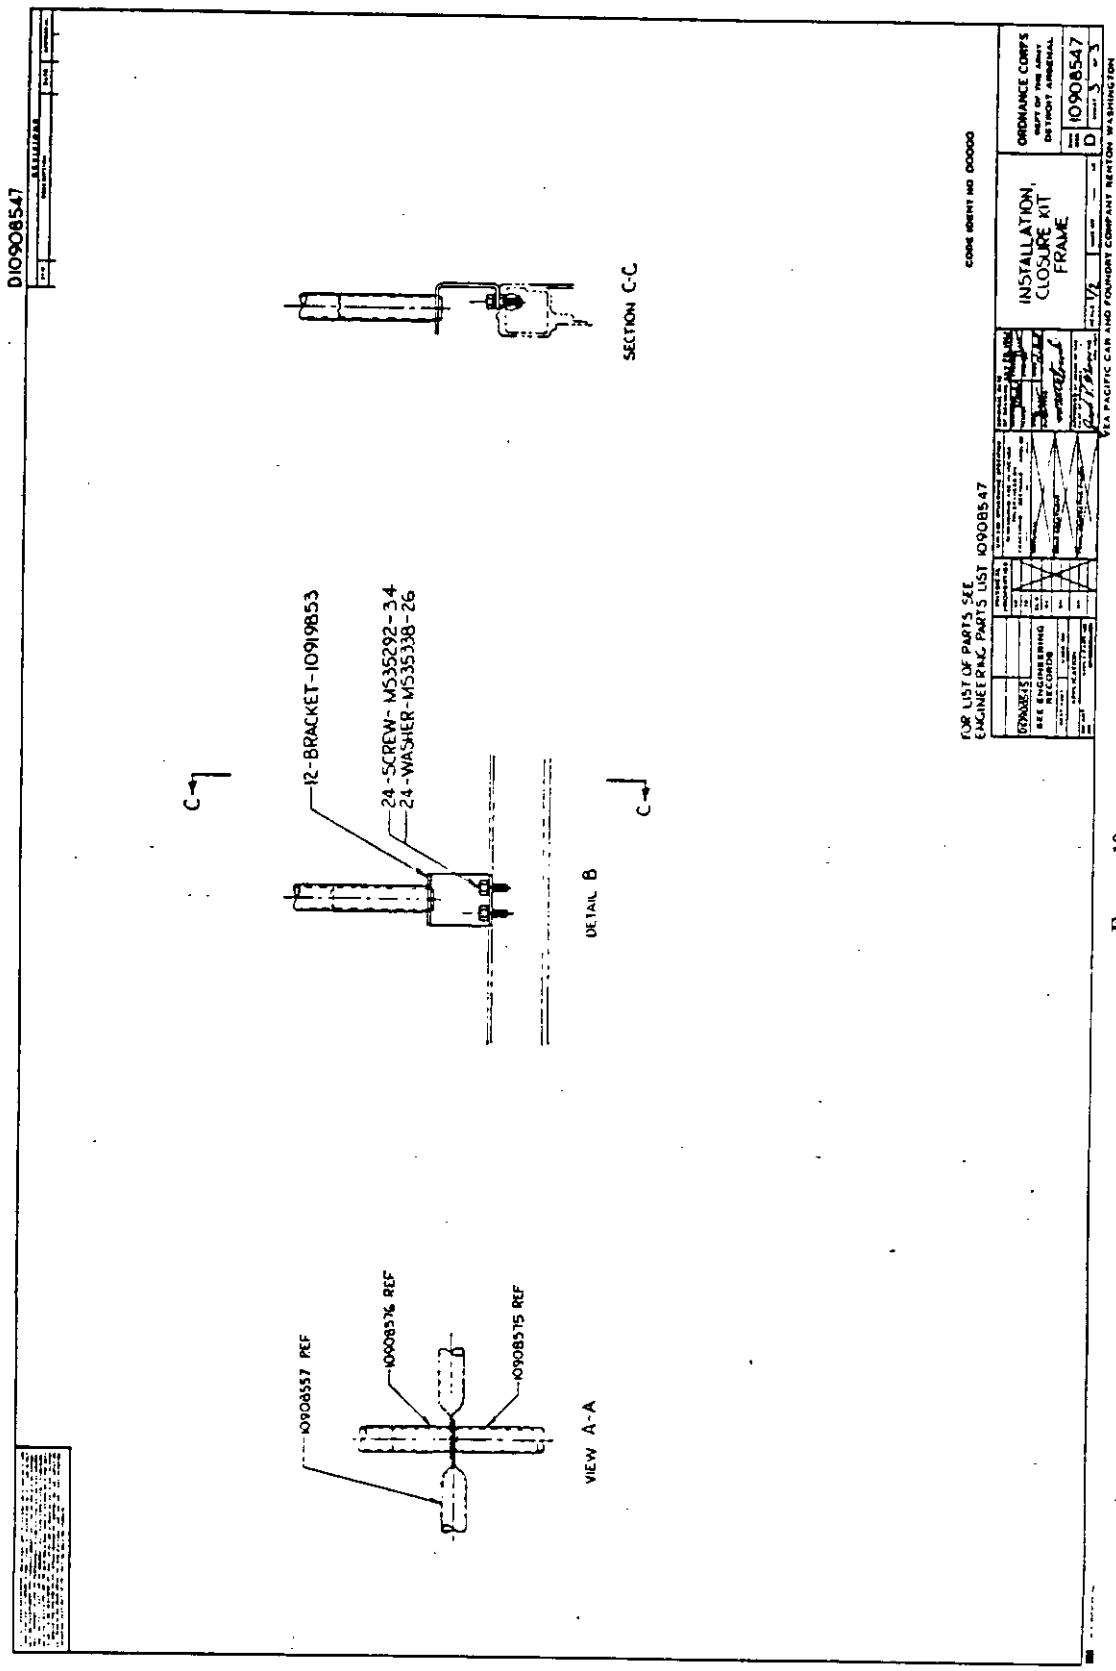


FIGURE 10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

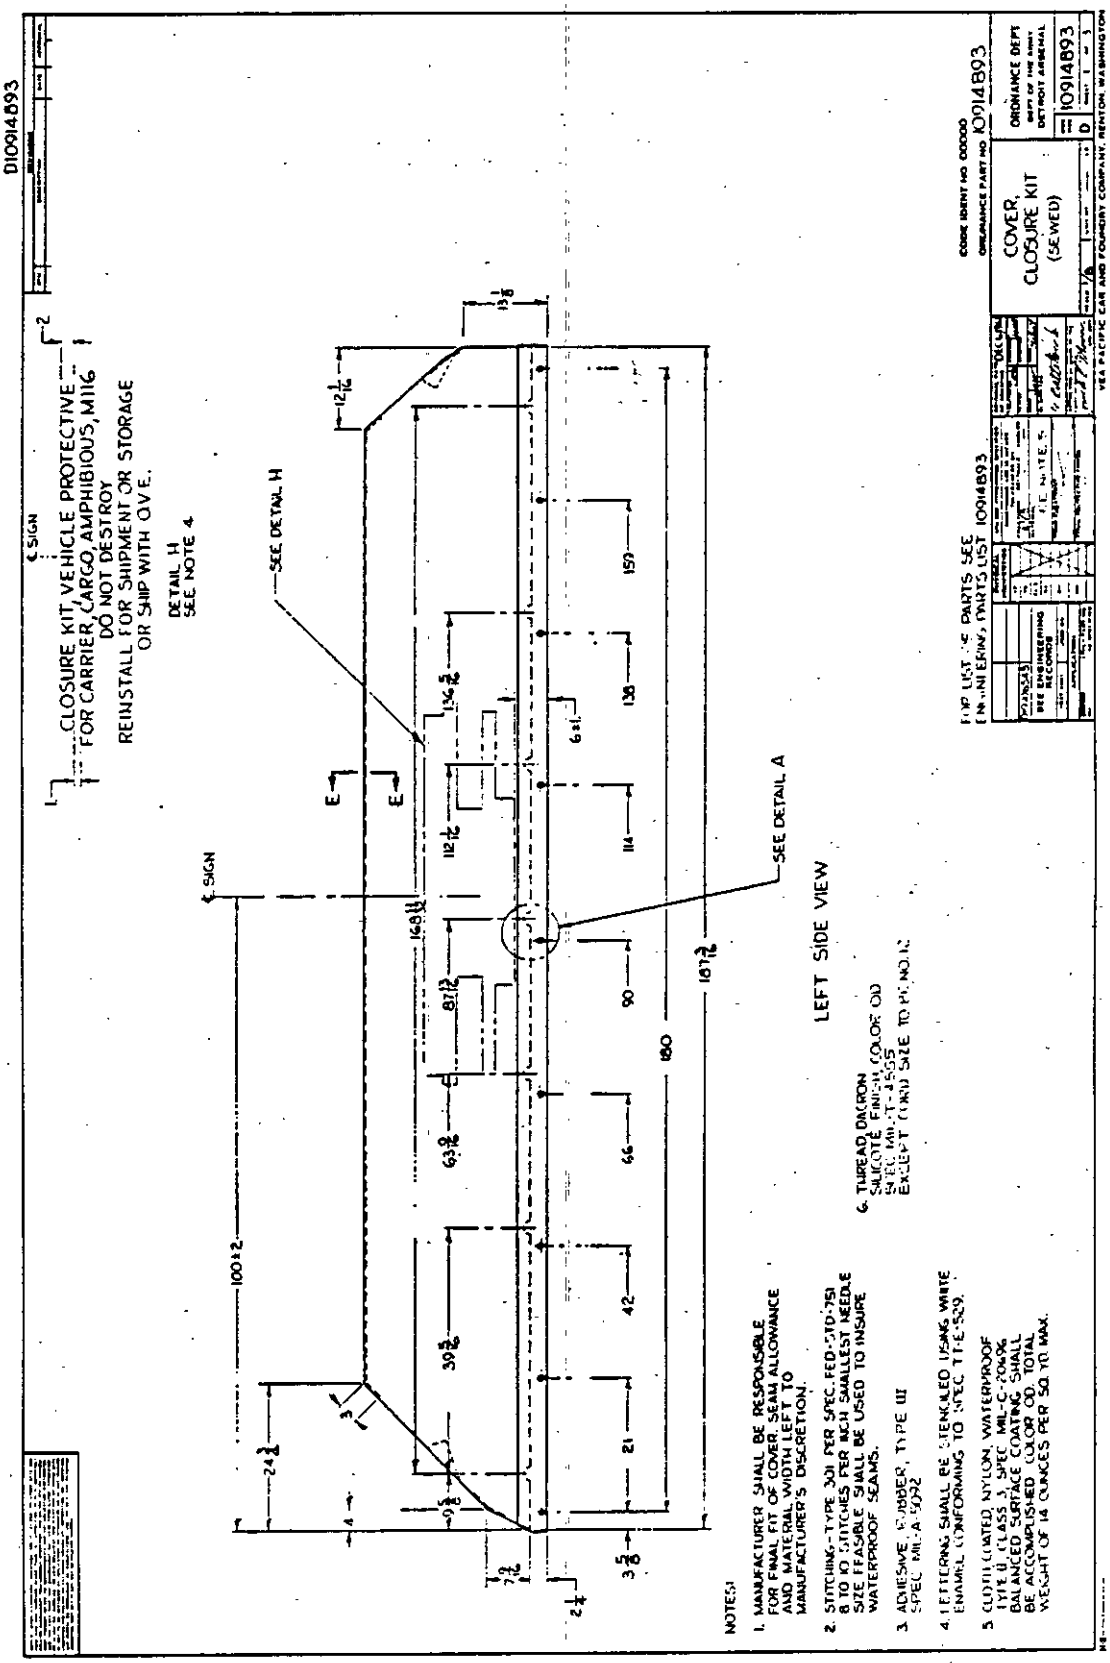


FIGURE 11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

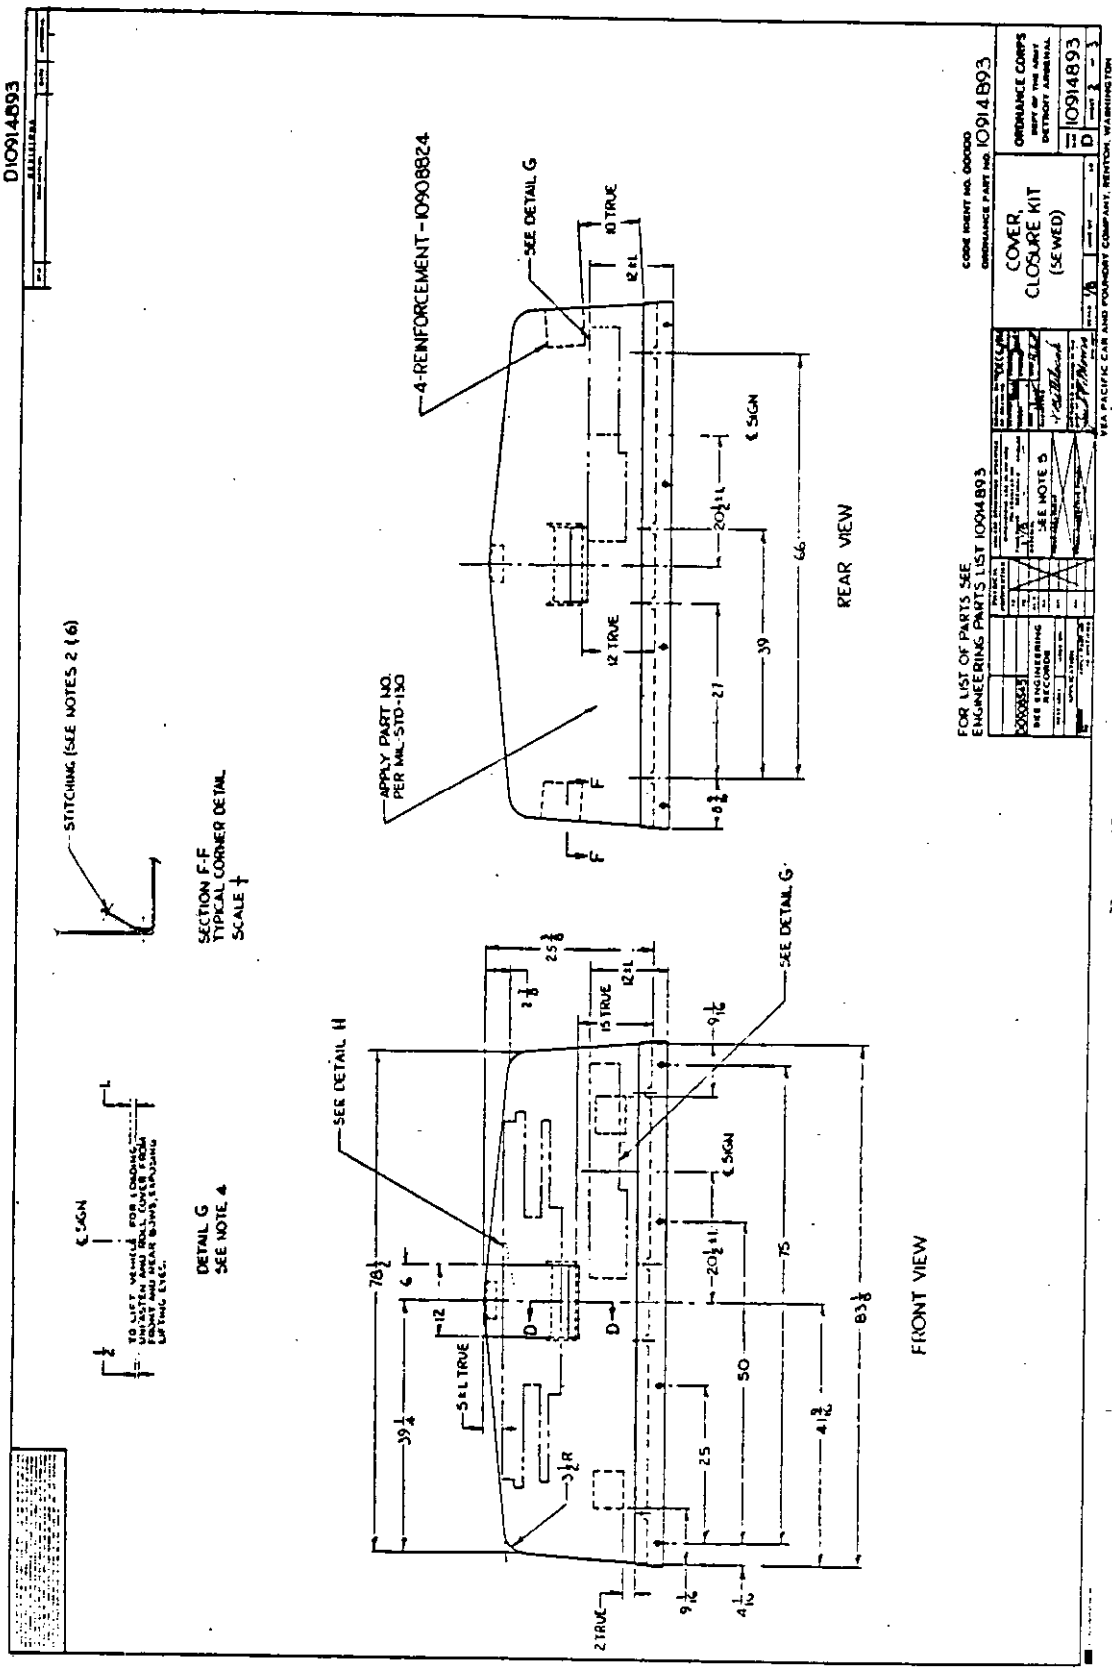


FIGURE 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

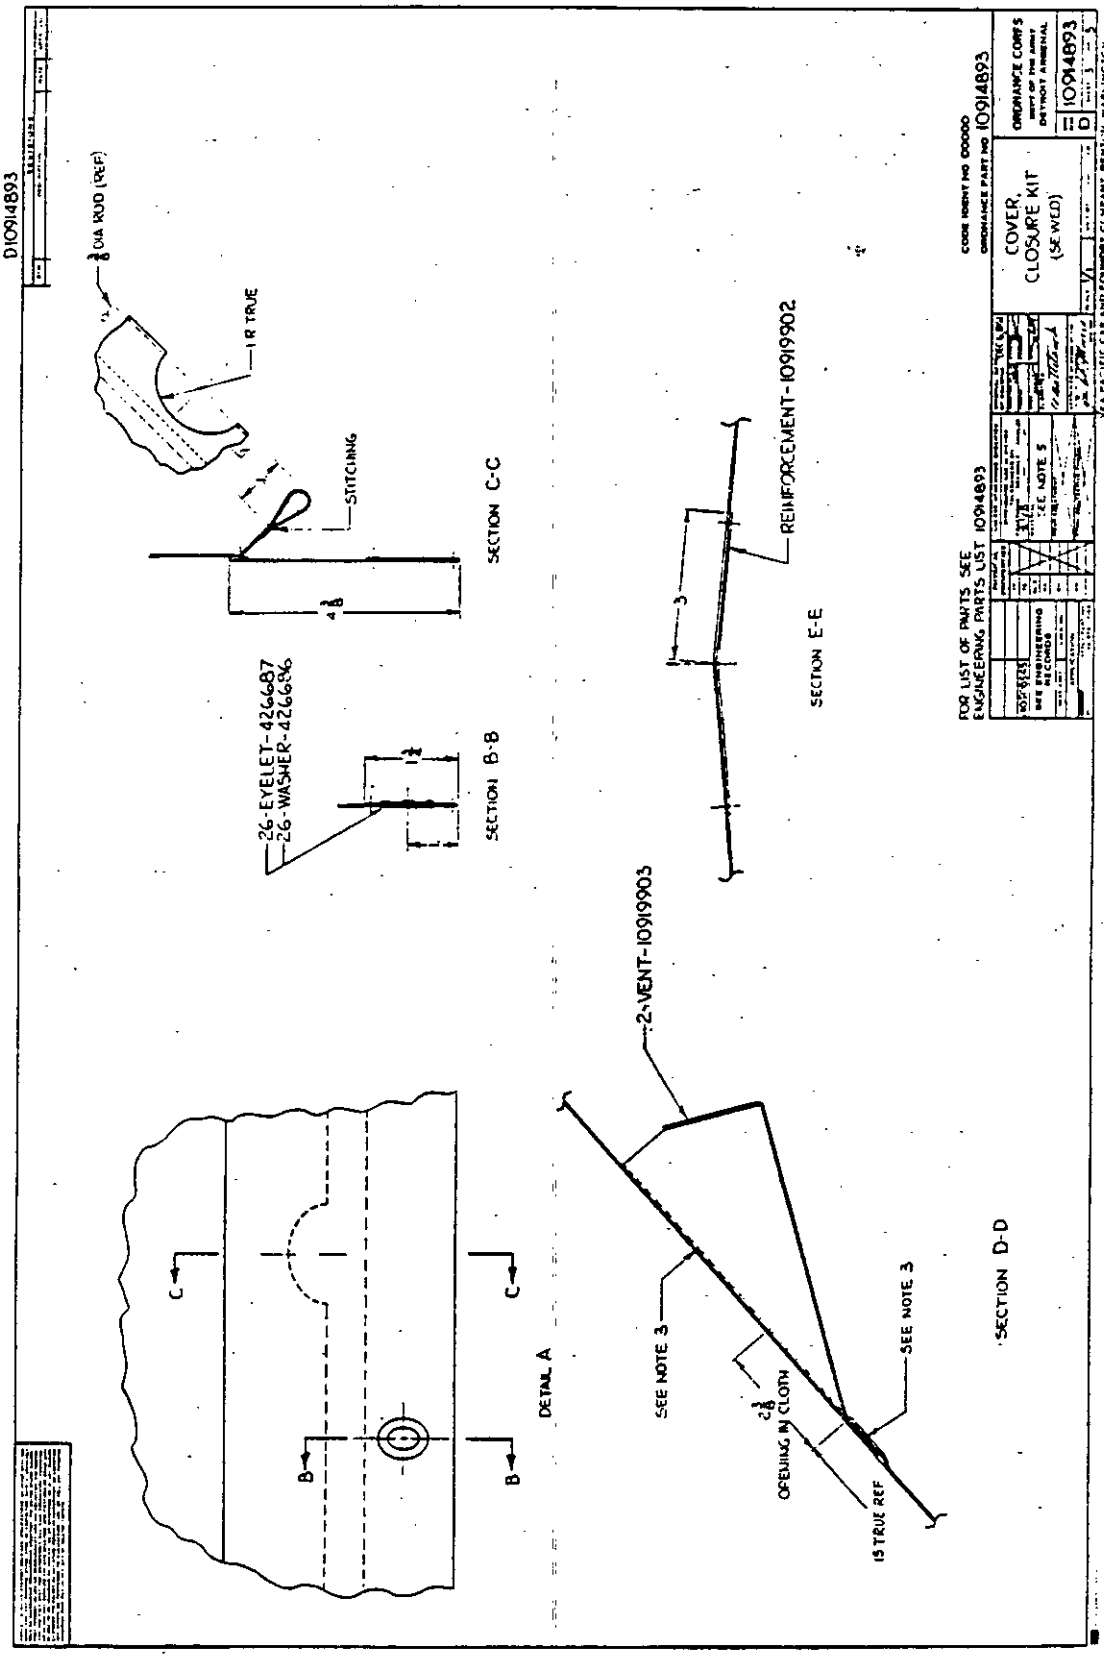


FIGURE 13.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.


A10908549

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PHYSICAL PROPERTIES	DO NOT	APPLY PART NO.
TP		
TS		
EL2		
FA		
BH		
RH		

APPLICATION	
NEXT ASSY	USED ON
SEE ENGINEERING RECORDS	
D10908575	C10915007
C10908848	
C10908855	

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL

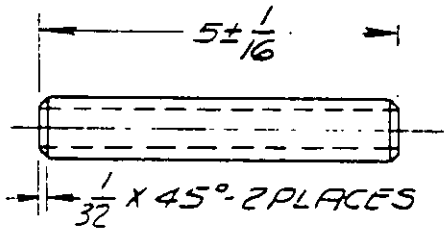

NOTE

1 TUBE, STEEL, CARBON
TYPE OPTIONAL
MT 1015 TO MTX 1020
CONDITION OPTIONAL
SPEC QQ-T-830
7/8 OD X .065 WALL

W/2 MADE

CODE IDENT NO. 00000

ORDNANCE PART NO. 10908549

6457-260

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES; TOLERANCES ON FRACTIONS ±1/32, DECIMALS —, ANGLES ±5°	ORIGINAL DATE OF DRAWING JULY 28 1961	CONNECTOR	ORDNANCE CORPS DEPT OF THE ARMY DETROIT ARSENAL
MATERIAL SEE NOTE 1	DRAFTSMAN BG / CHECKED		
HEAT TREATMENT	TRACER / CHECKED		
FINAL PROTECTIVE FINISH	ENGR / ENGR		
	SUBMITTED ORD CORPS		
	APPROVED BY ORDER OF THE CHIEF OF ORDNANCE ORD CORPS	SCALE 1/2 / UNIT WT —	DWG SIZE A / 10908549 / SHEET — OF —

VEA PACIFIC CAR AND FOUNDRY COMPANY, RENTON, WASHINGTON

FIGURE 14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

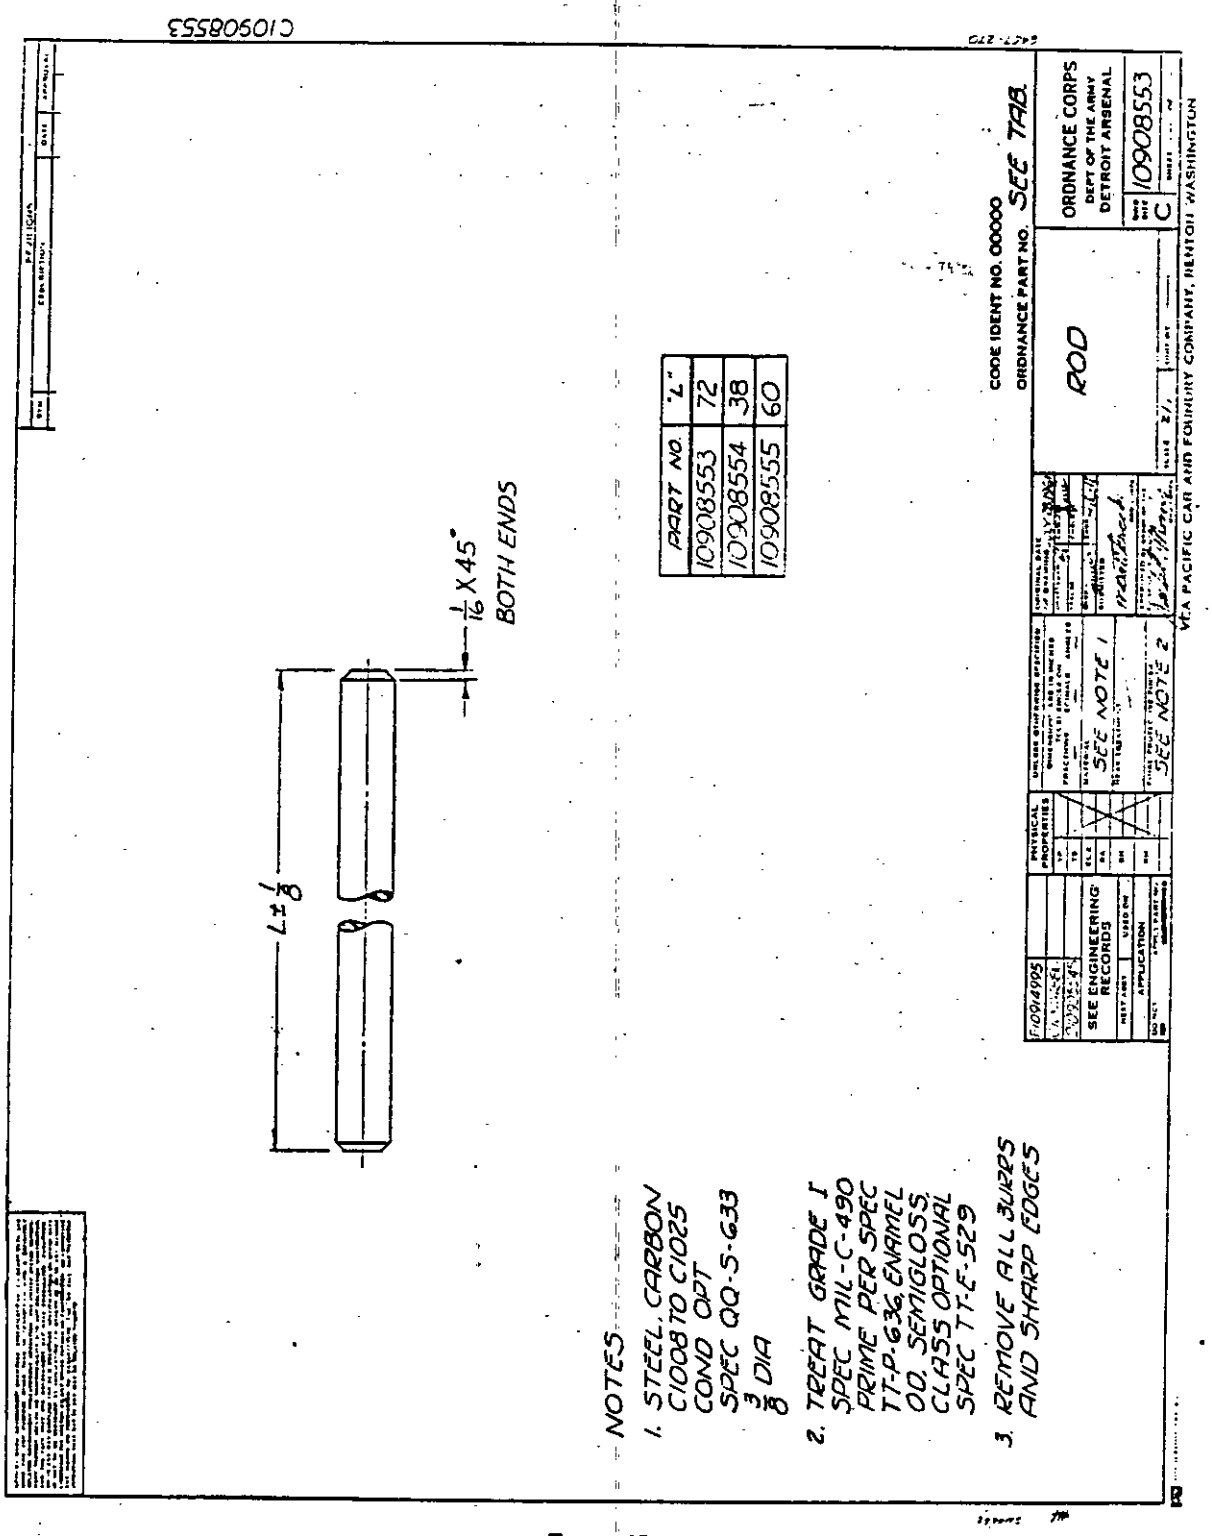


FIGURE 15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

A10908554

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PHYSICAL PROPERTIES	DO NOT	APPLY PART NO.
YP	APPLICATION	
TS	NEXT ASSY	USED ON
EL2	SEE ENGINEERING RECORDS	
RA	D10908545	
BH		
RH		

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL

SEE DRAWING C10908553 FOR DESCRIPTION OF THIS PART

DUMMY DRAWING

4 MAY 62

CODE IDENT NO. 00000

ORDNANCE PART NO. 10908554

6457-316

UNLESS OTHERWISE SPECIFIED	ORIGINAL DATE OF DRAWING JULY 28, 1961			
DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS DECIMALS ANGLES — —	DRAFTSMAN J.F.L.	CHECKER	ROD	ORDNANCE CORPS DEPT OF THE ARMY DETROIT ARSENAL
MATERIAL	TRACER	CHECKER		
HEAT TREATMENT	ENGR	ENGR		
FINAL PROTECTIVE FINISH	SUBMITTED Battilocchi ORD CORPS			
	APPROVED BY ORDER OF THE CHIEF OF ORDNANCE ORD CORPS	SCALE —	DWG SIZE A	10908554
		UNIT WT —		SHEET — OF —

VEA PACIFIC CAR AND FOUNDRY COMPANY, RENTON, WASHINGTON

FIGURE 16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

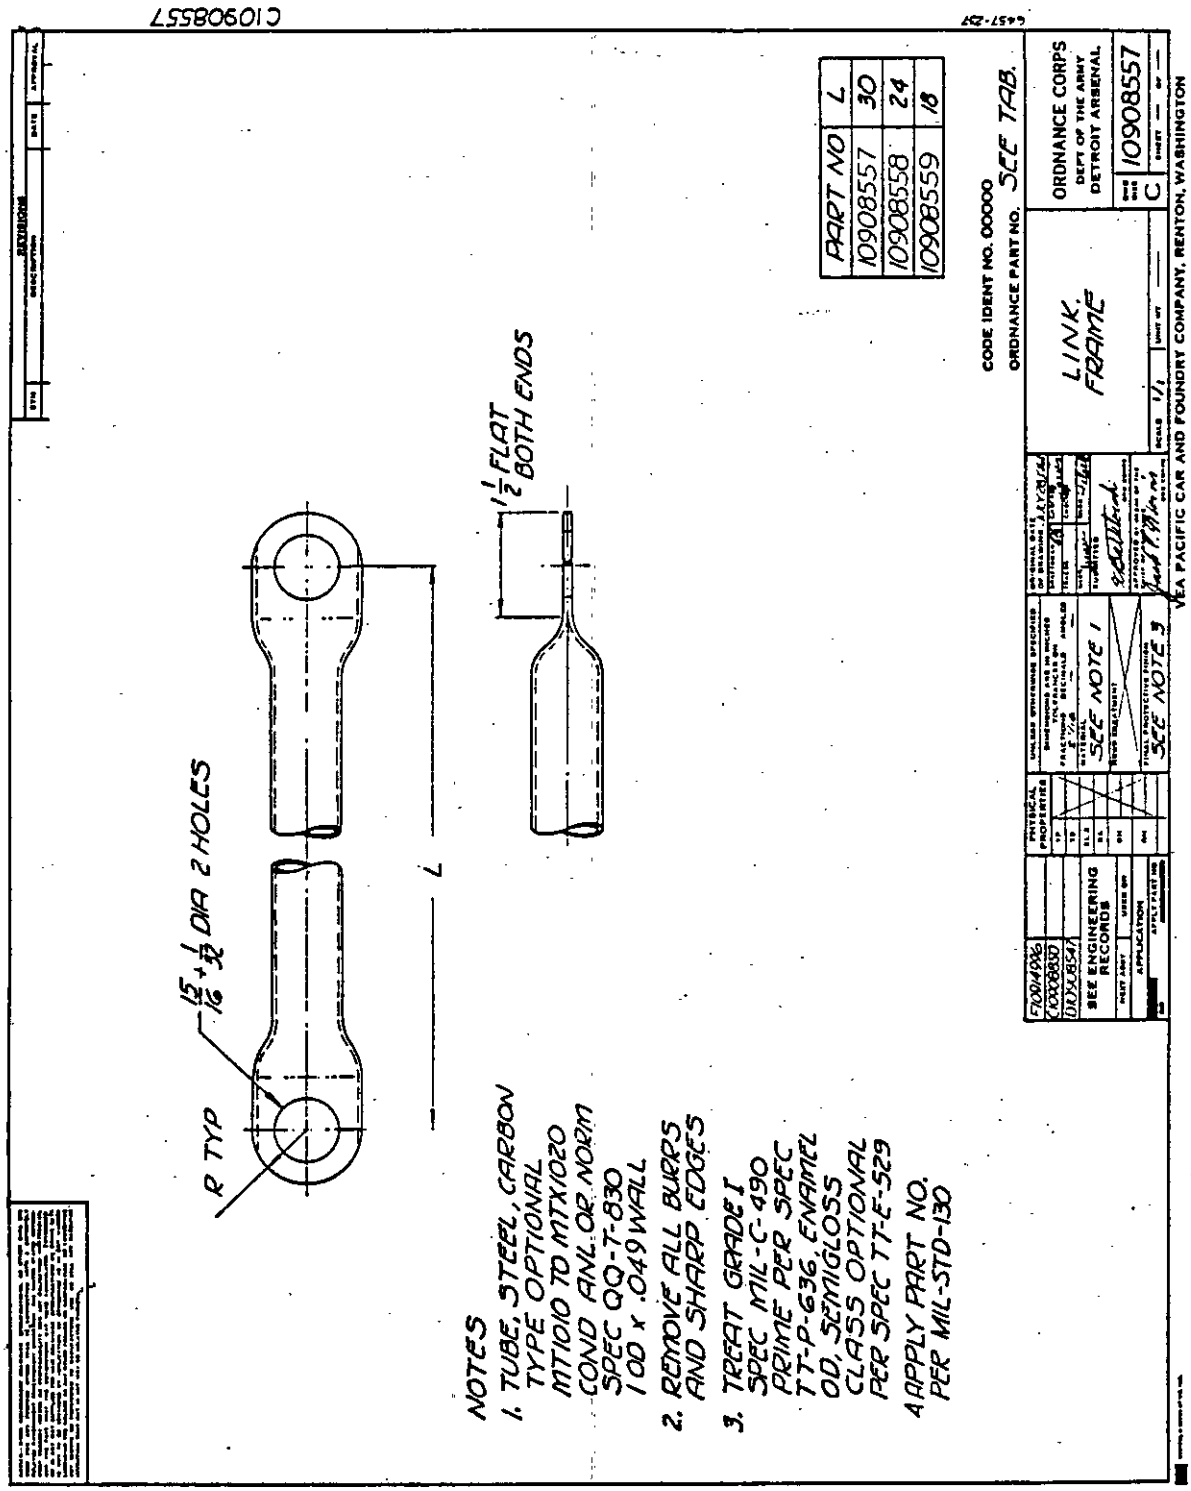


FIGURE 17.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

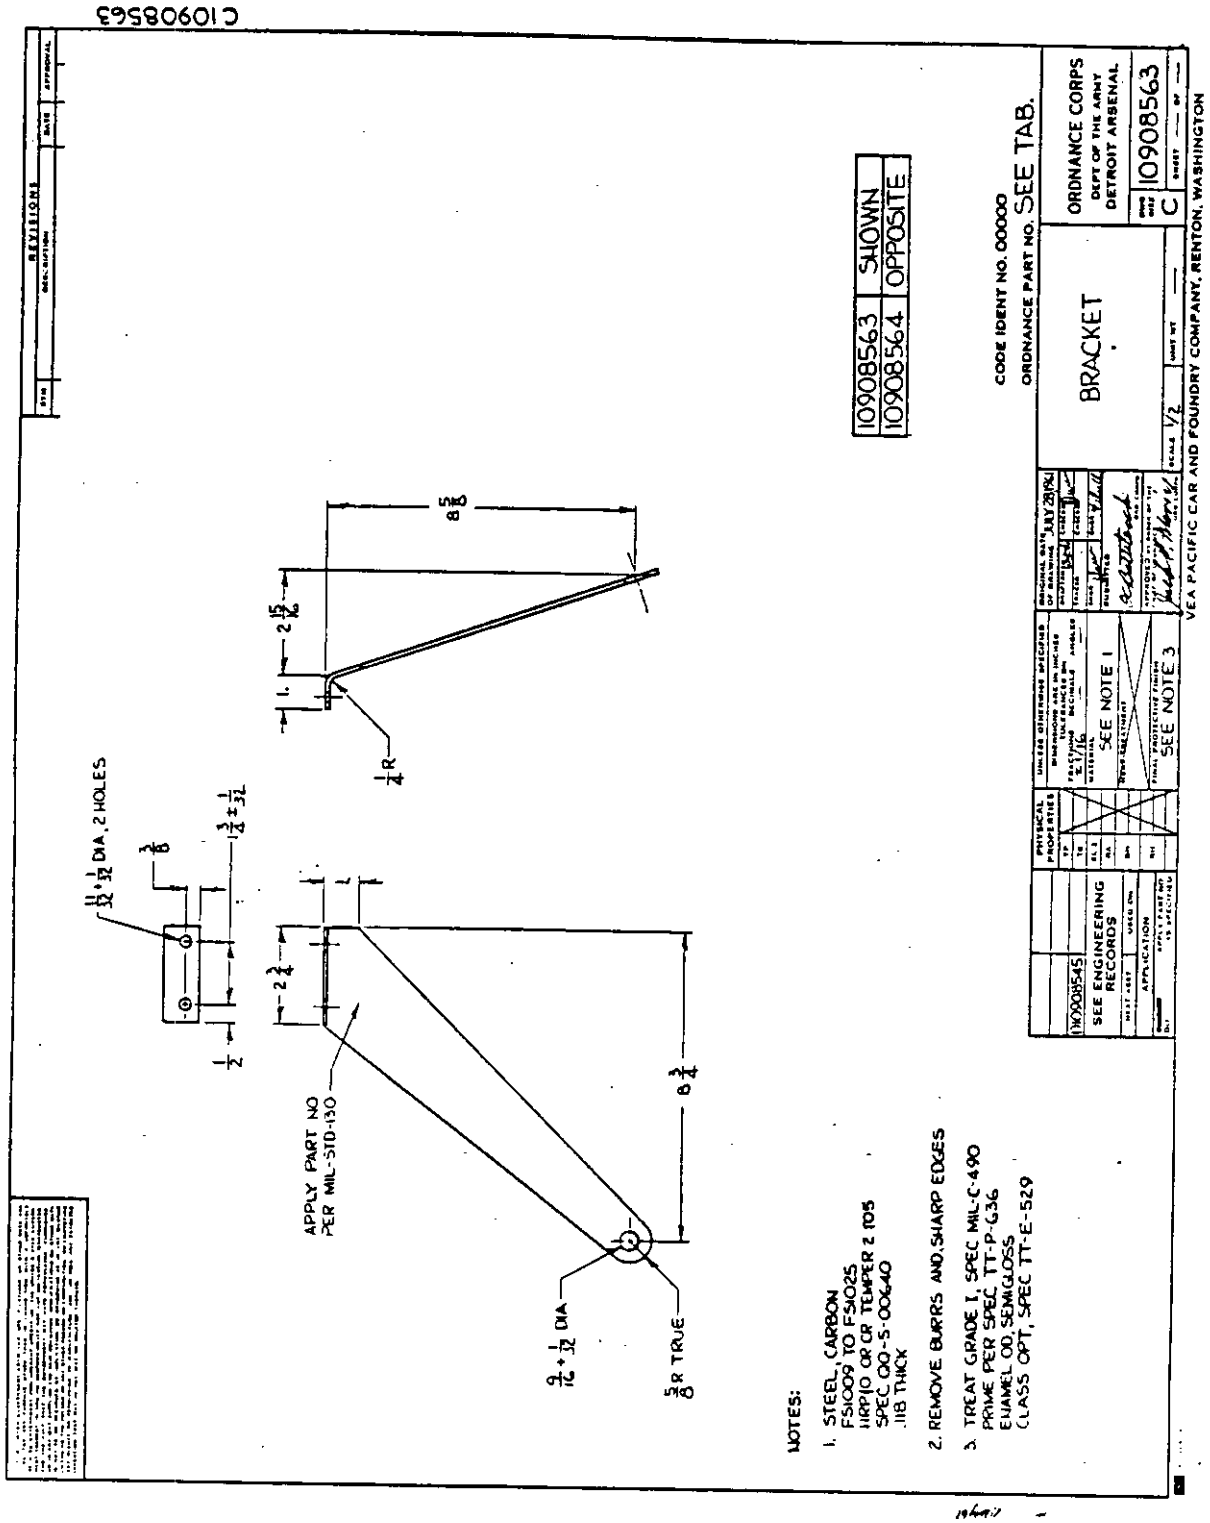


FIGURE 18.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

A10908564

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PHYSICAL PROPERTIES		APPLY PART NO. AS SPECIFIED
YP		DO
TS		APPLICATION
EL2		NEXT ASSY / USED ON
RA		SEE ENGINEERING RECORDS
BH		D10908545
RH		

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL

SEE DRAWING C10908563 FOR DESCRIPTION OF THIS PART

DUMMY DRAWING

CODE IDENT NO. 00000

ORDNANCE PART NO. 10908564

UNLESS OTHERWISE SPECIFIED	ORIGINAL DATE OF DRAWING JULY 28,1961	BRACKET	ORDNANCE CORPS DEPT OF THE ARMY
DIMENSIONS ARE IN INCHES TOLERANCES ON FRACTIONS DECIMALS ANGLES	DRAFTSMAN CHECKED		DETROIT ARSENAL
MATERIAL	TRACER CHECKED		
HEAT TREATMENT	ENGR ENGR		
FINAL PROTECTIVE FINISH	SUBMITTED C. Battistocchi ORD CORPS	SCALE —	DWG SIZE A / 10908564
	APPROVED BY ORDER OF THE CHIEF OF ORDNANCE Jack R. Moore ORD CORPS	UNIT WT —	SHEET — OF —

VEA PACIFIC CAR AND FOUNDRY COMPANY, RENTON, WASHINGTON

FIGURE 19.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

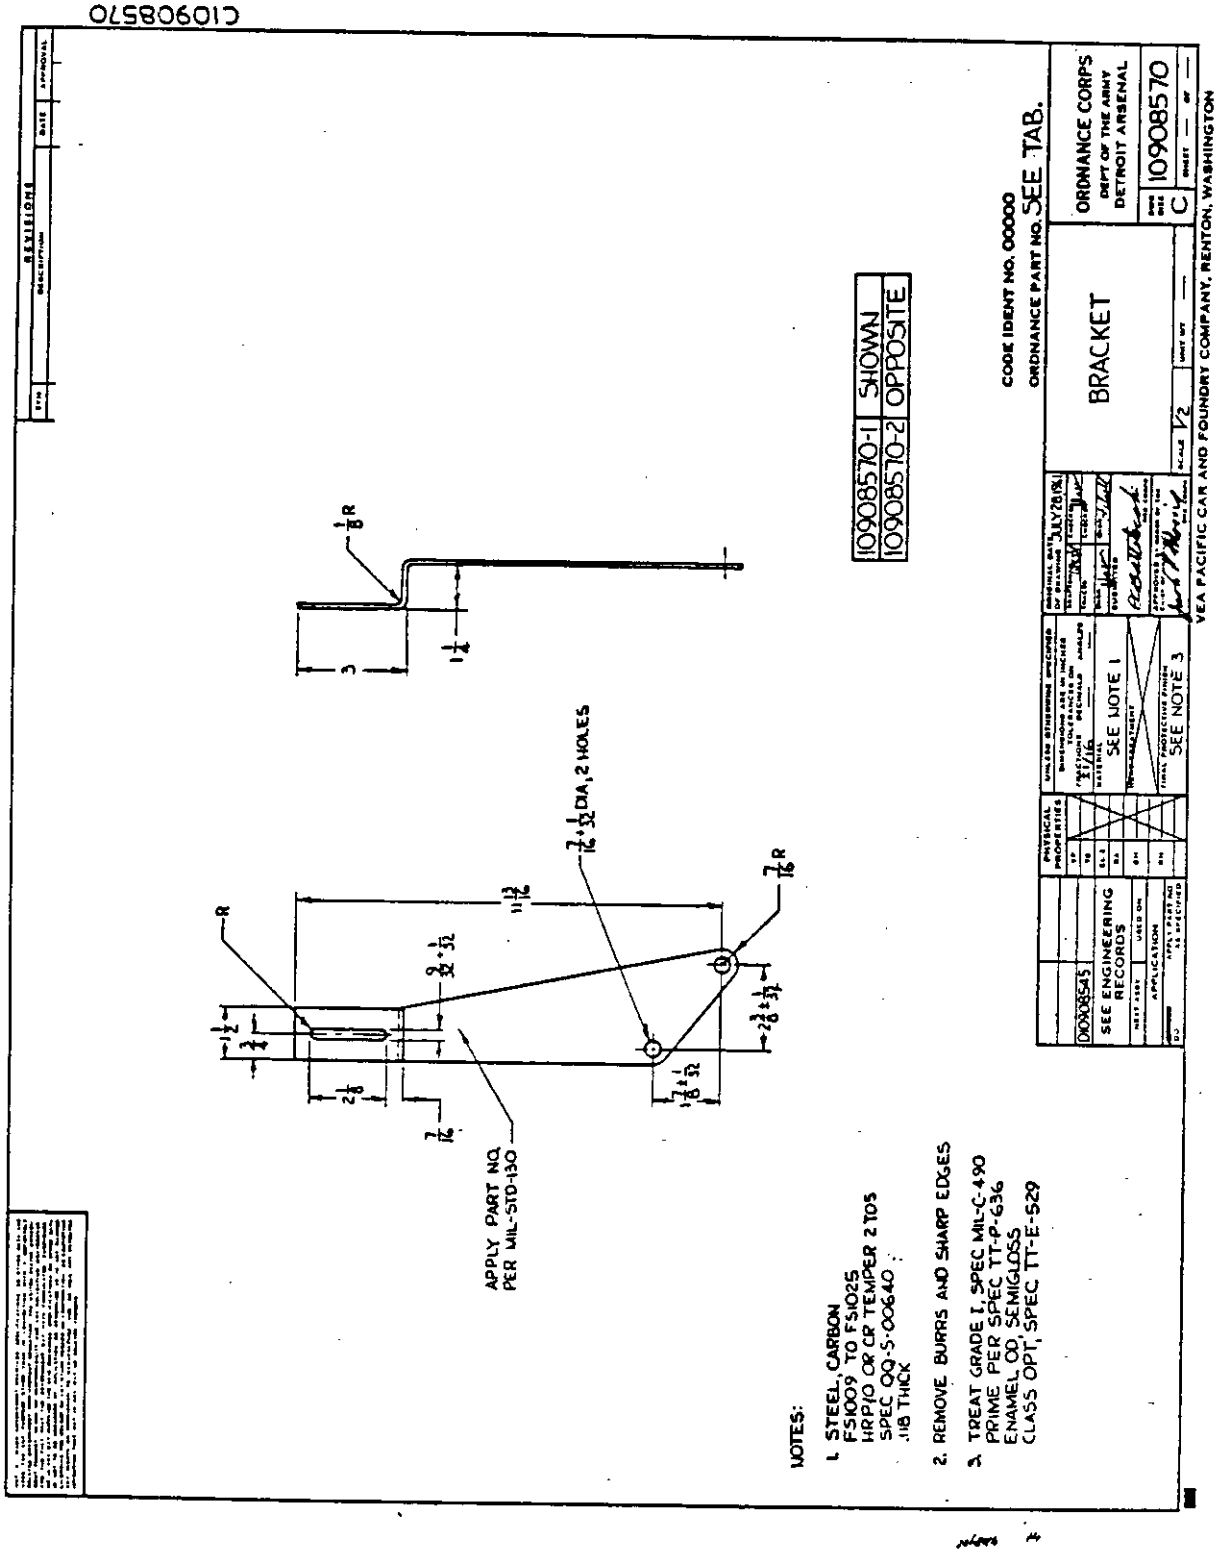


FIGURE 20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

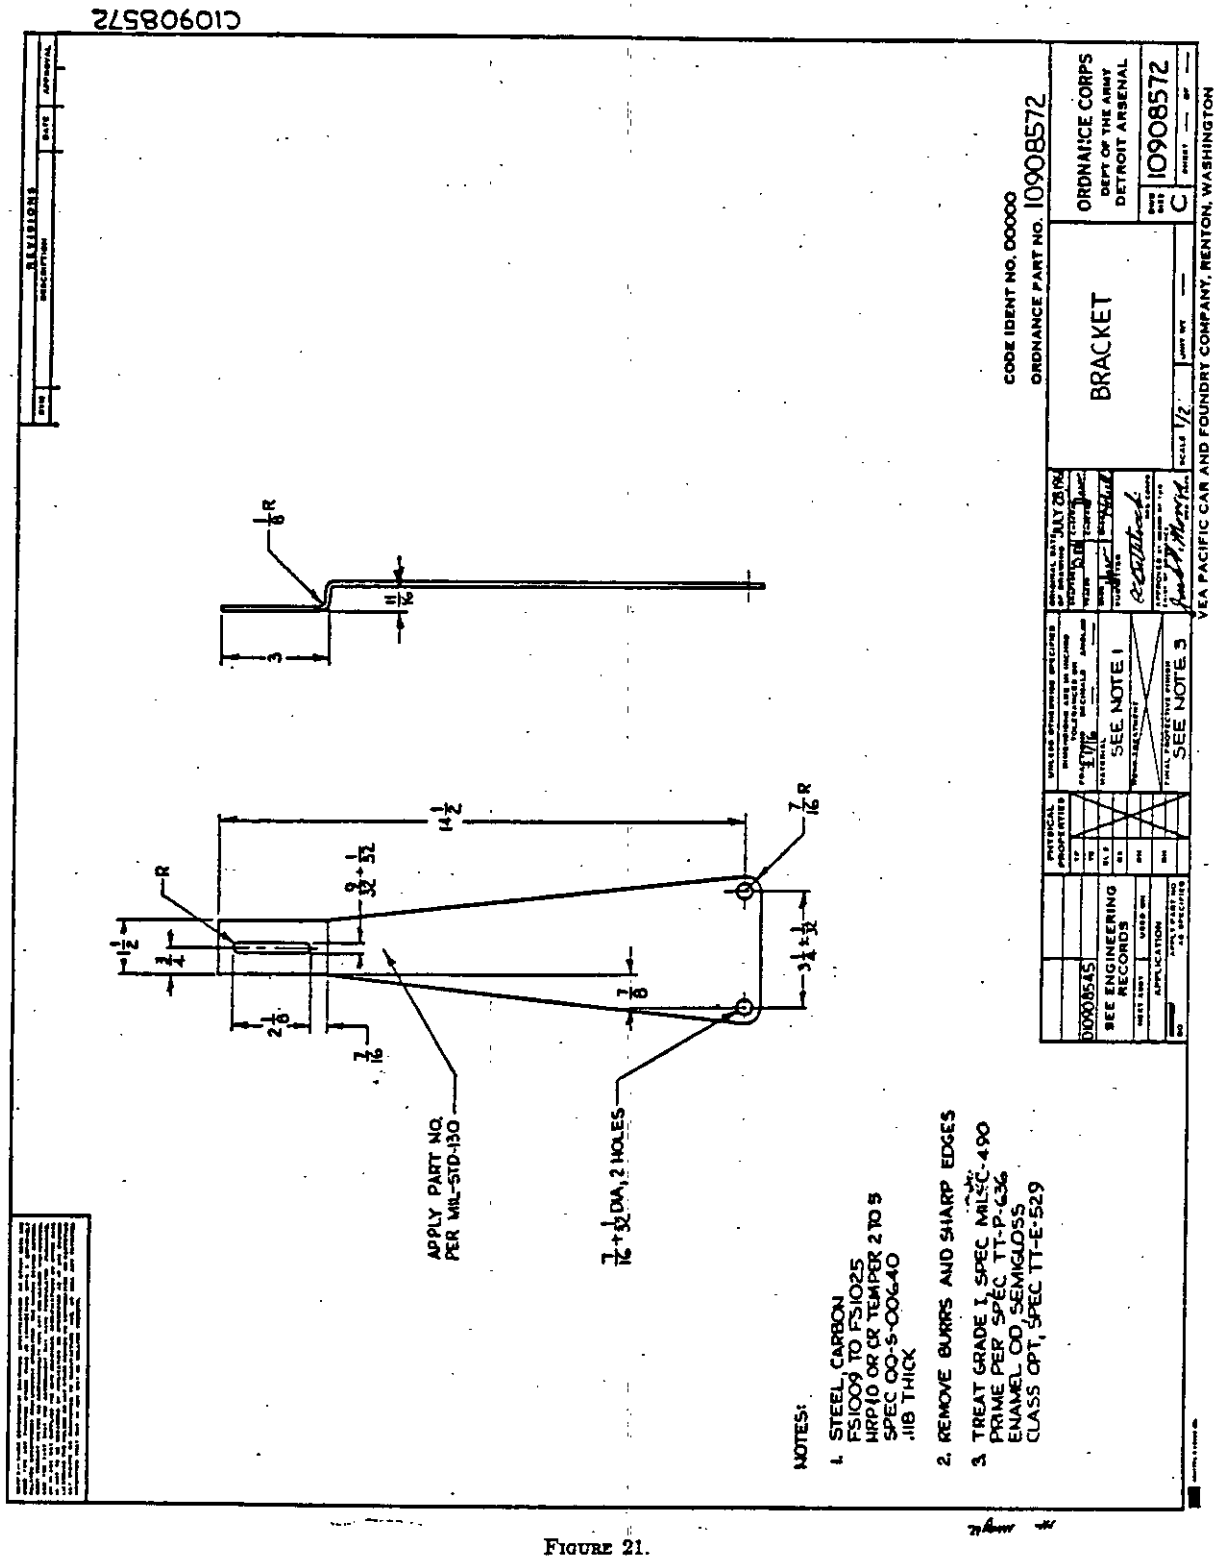


FIGURE 21.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

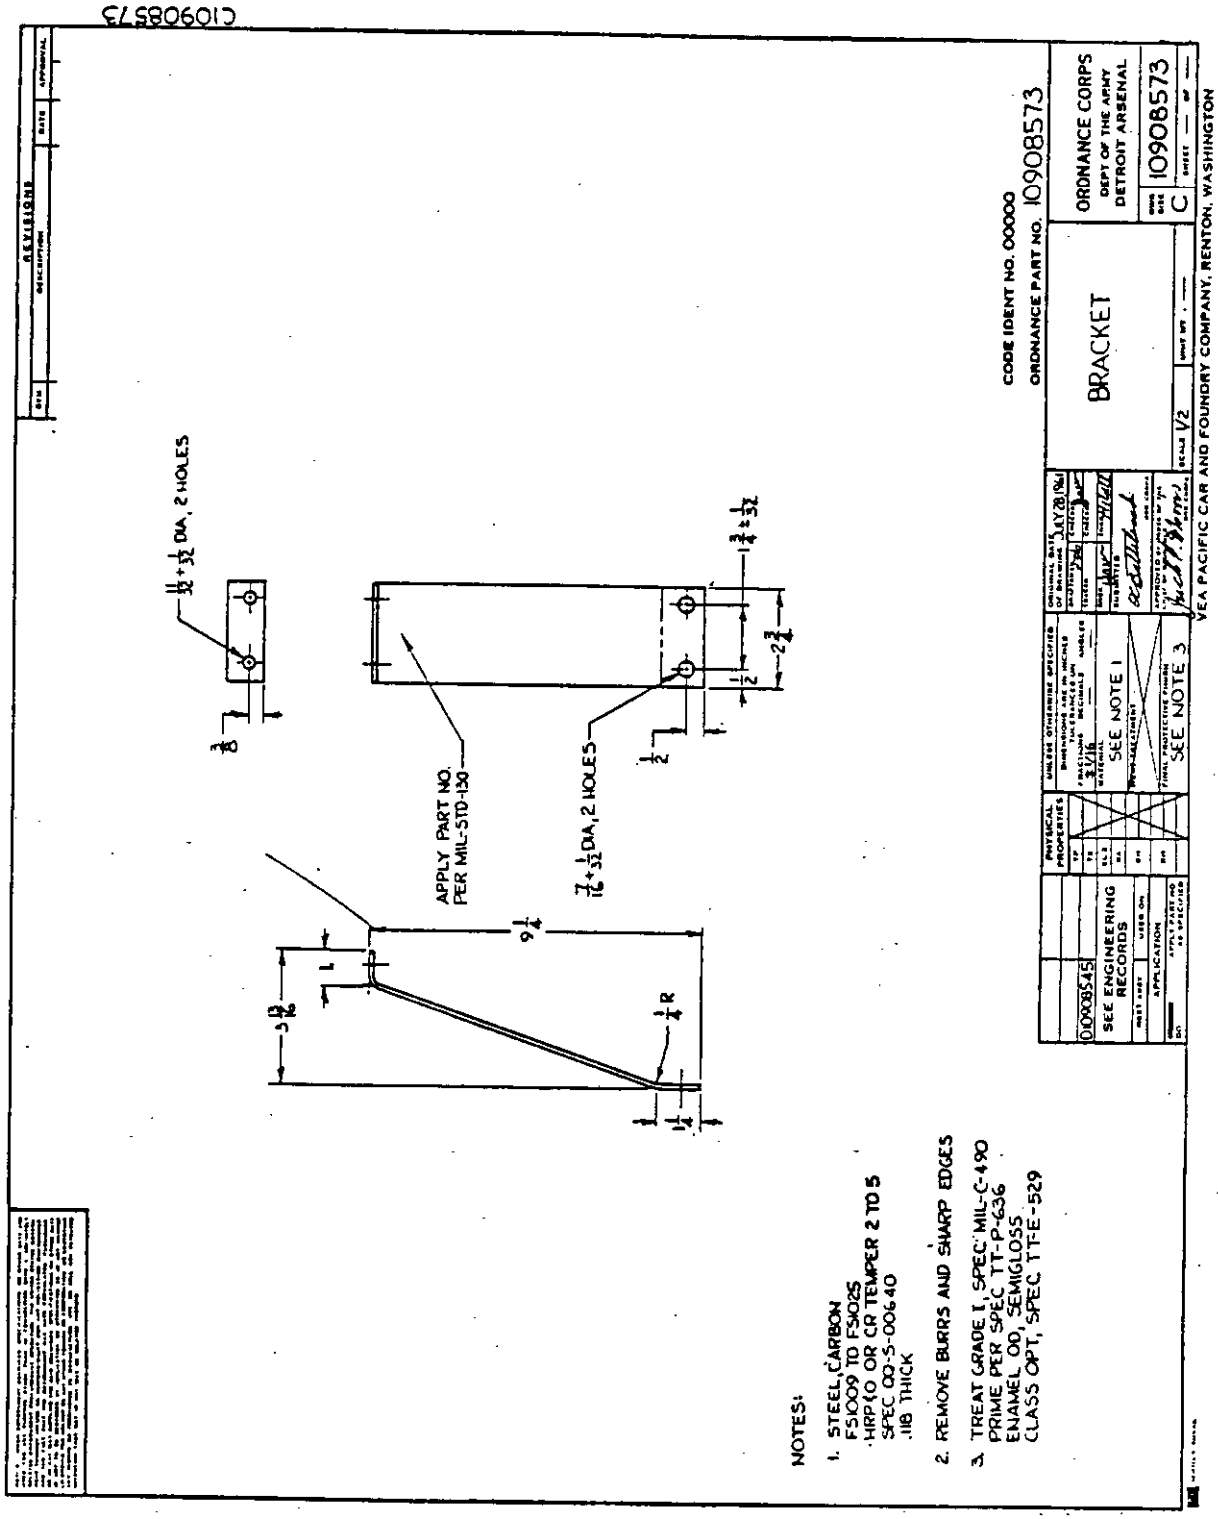


FIGURE 22.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

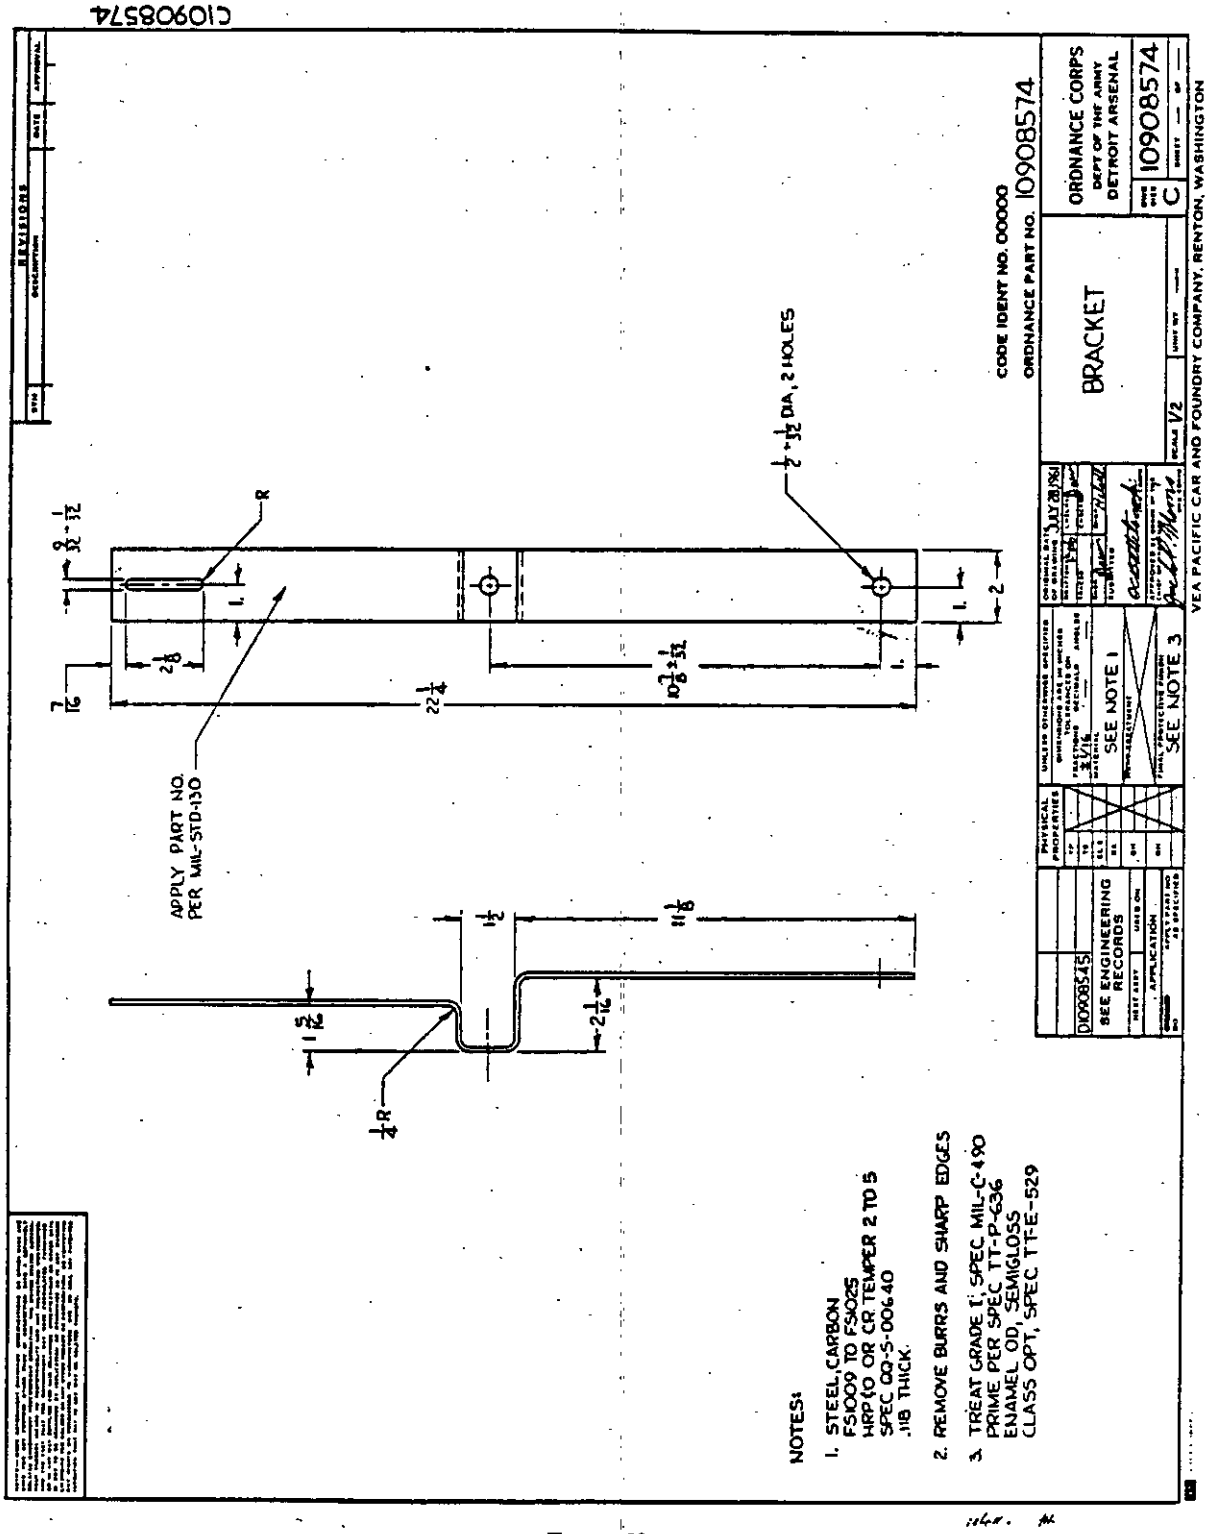


FIGURE 23.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

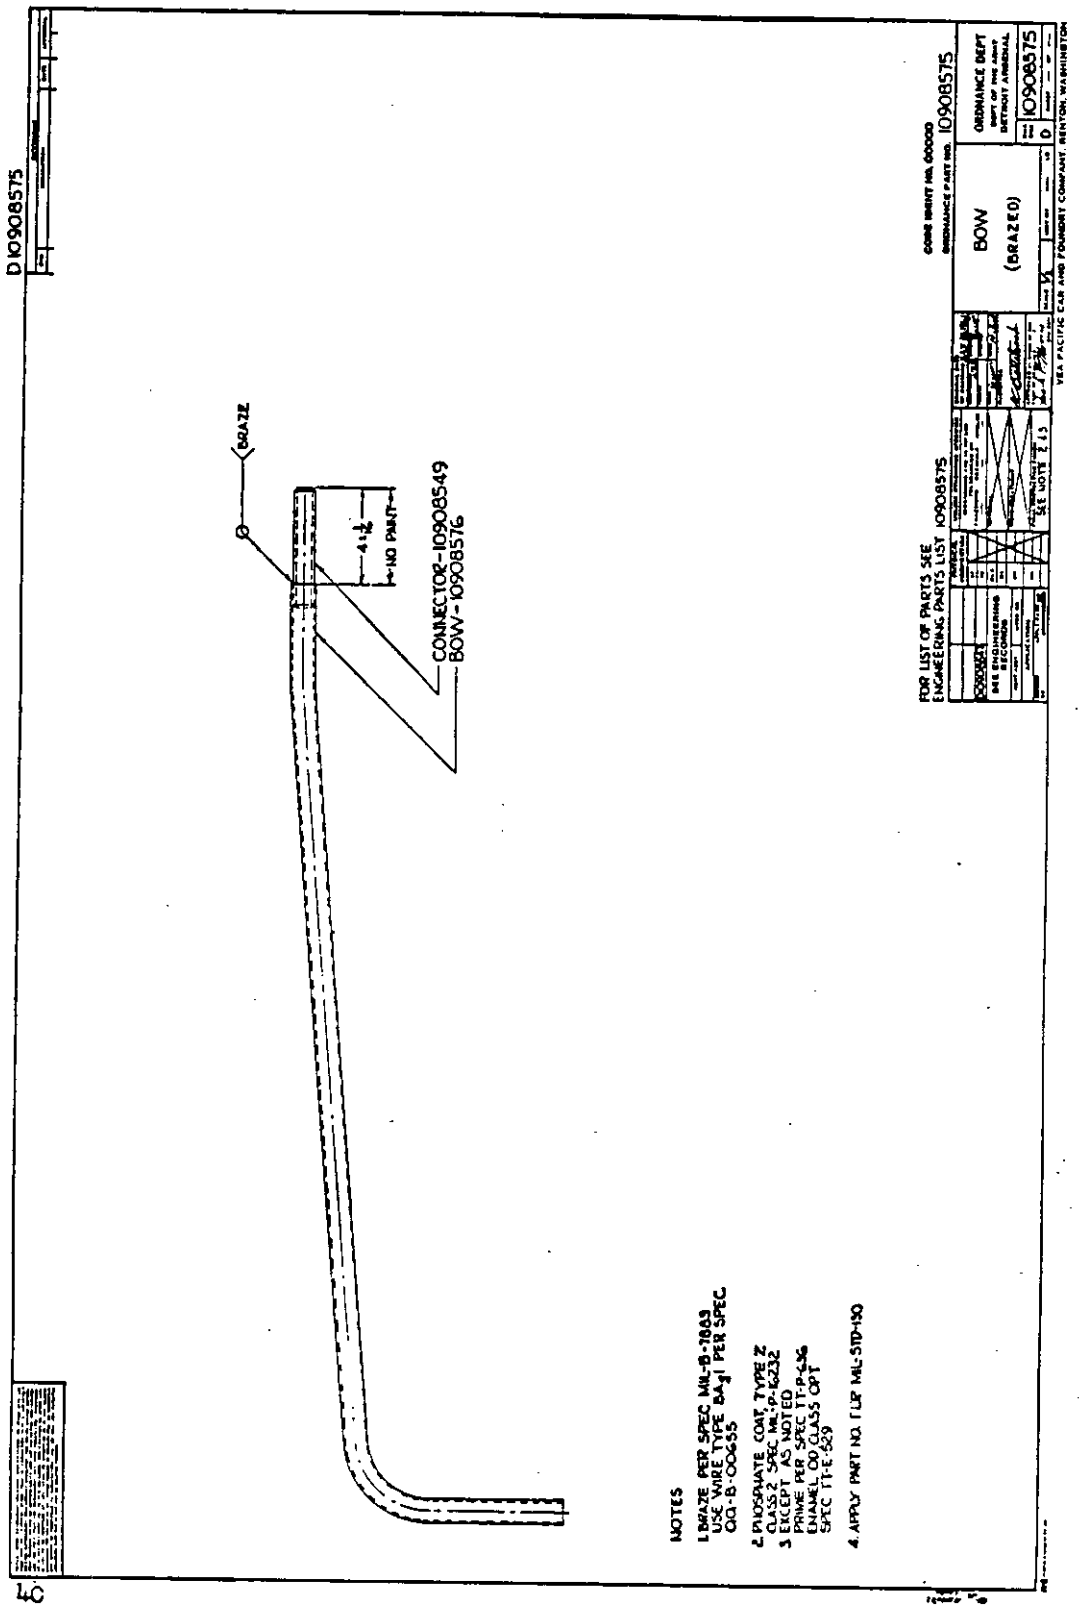


FIGURE 24.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

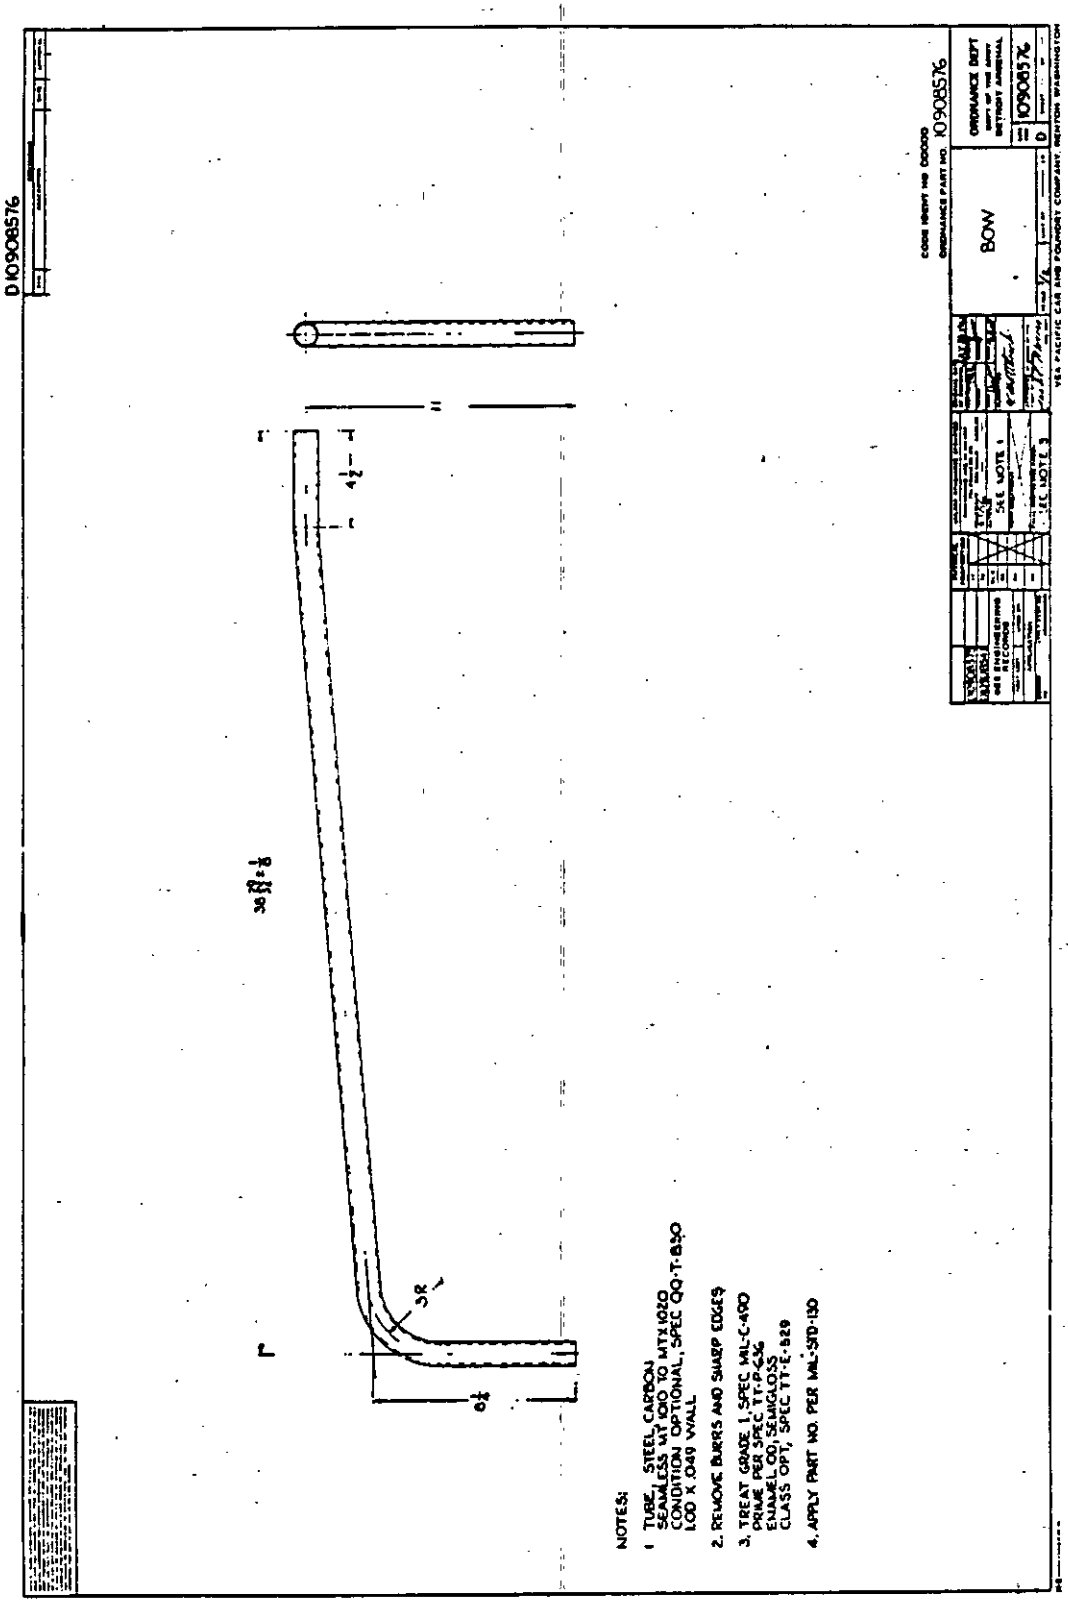


FIGURE 25.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

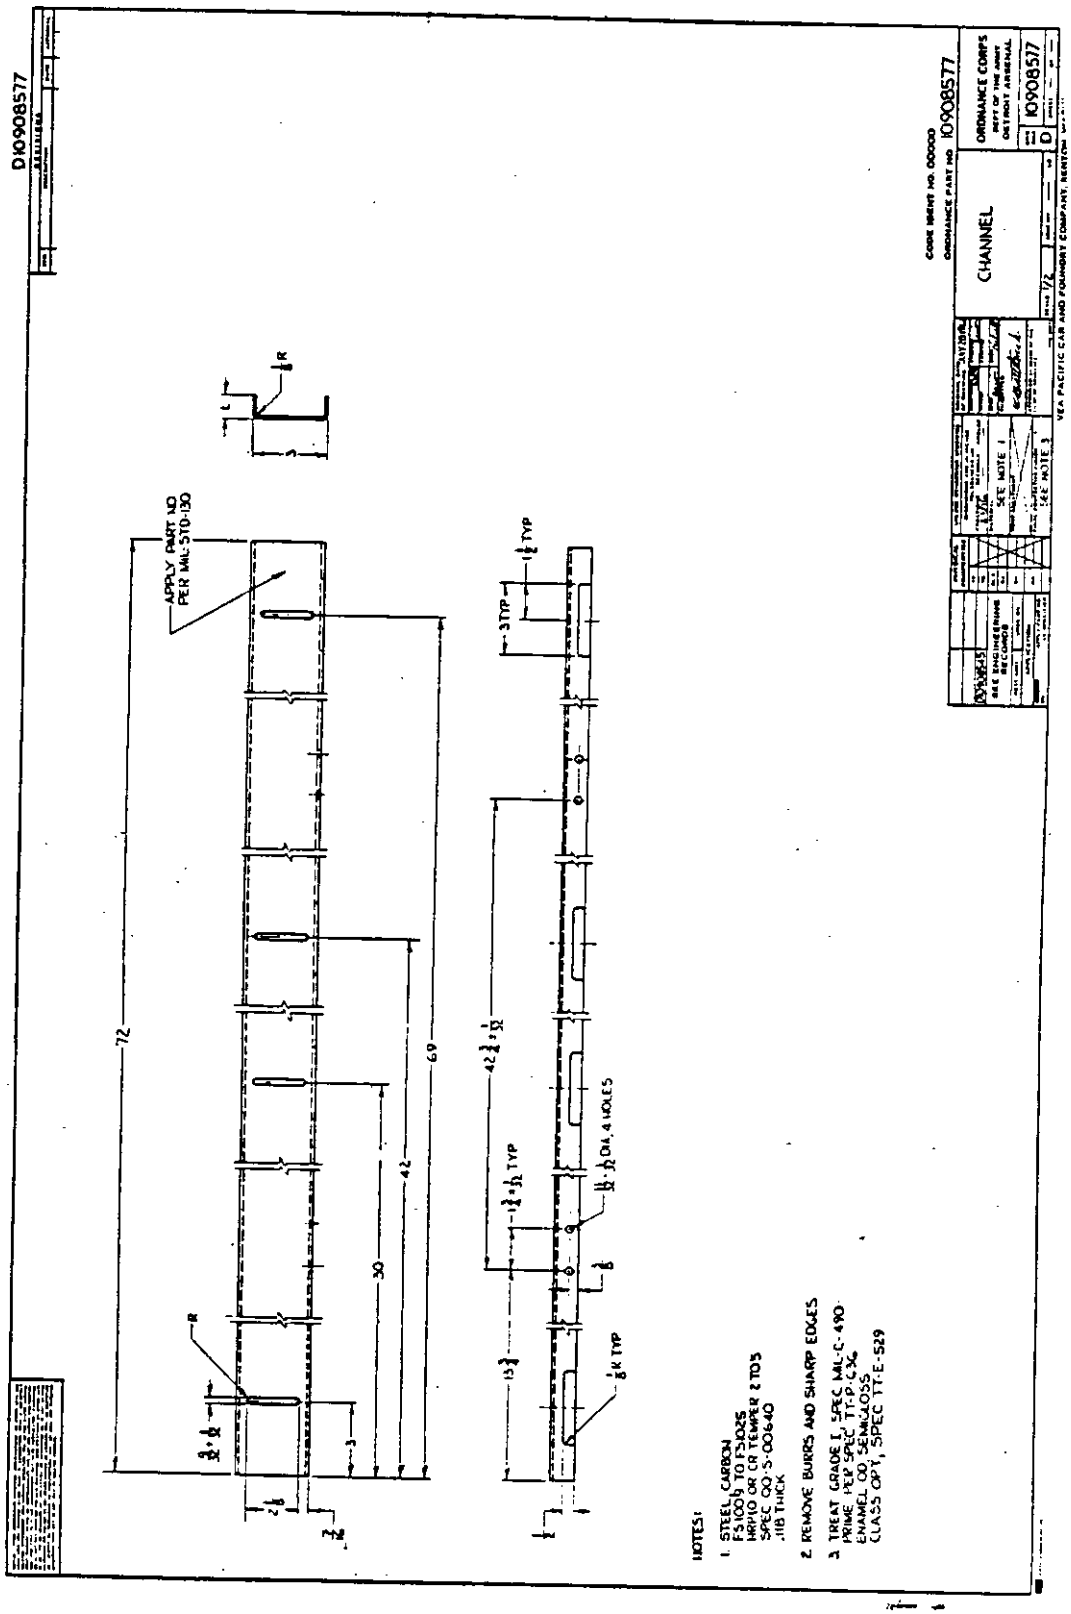


FIGURE 26.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

A10908824

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

PHYSICAL PROPERTIES	DO NOT [redacted]	APPLY PART NO. [redacted]
YP	APPLICATION	
TS	NEXT ASSY	USED ON
EL2	SEE ENGINEERING RECORDS	
RA		
BH	D10914893	
RH	C10914887	
	F10914997	

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL



NOTE

1. CLOTH, COATED, NYLON, WATERPROOF, TYPE II, CLASS 3. SPEC MIL-C-20696. BALANCED SURFACE COATING SHALL BE ACCOMPLISHED. COLOR OD. EXCEPT TOTAL WEIGHT 14 OUNCES PER SQUARE YARD MAX. 2 THICKNESSES OF MATERIAL

CODE IDENT NO. 00000

ORDNANCE PART NO. 10908824

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES; TOLERANCES ON FRACTIONS ± 1/8, DECIMALS —, ANGLES —	ORIGINAL DATE OF DRAWING SEP 6, 1961	REINFORCEMENT, COVER	ORDNANCE CORPS DEPT OF THE ARMY DETROIT ARSENAL
MATERIAL SEE NOTE 1	DRAFTSMAN [illegible] CHECKER [illegible]		
HEAT TREATMENT	TRACER — CHECKER —		
FINAL PROTECTIVE FINISH	ENGR [illegible] ENGR Hibbell		
	SUBMITTED [illegible] ORD CORPS		
	APPROVED BY ORDER OF THE CHIEF OF ORDNANCE [illegible] ORD CORPS	SCALE 1/4	DWG SIZE A — 10908824
		UNIT WT —	SHEET — OF —

6457-A-298

VEA PACIFIC CAR AND FOUNDRY COMPANY, RENTON, WASHINGTON

FIGURE 27.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

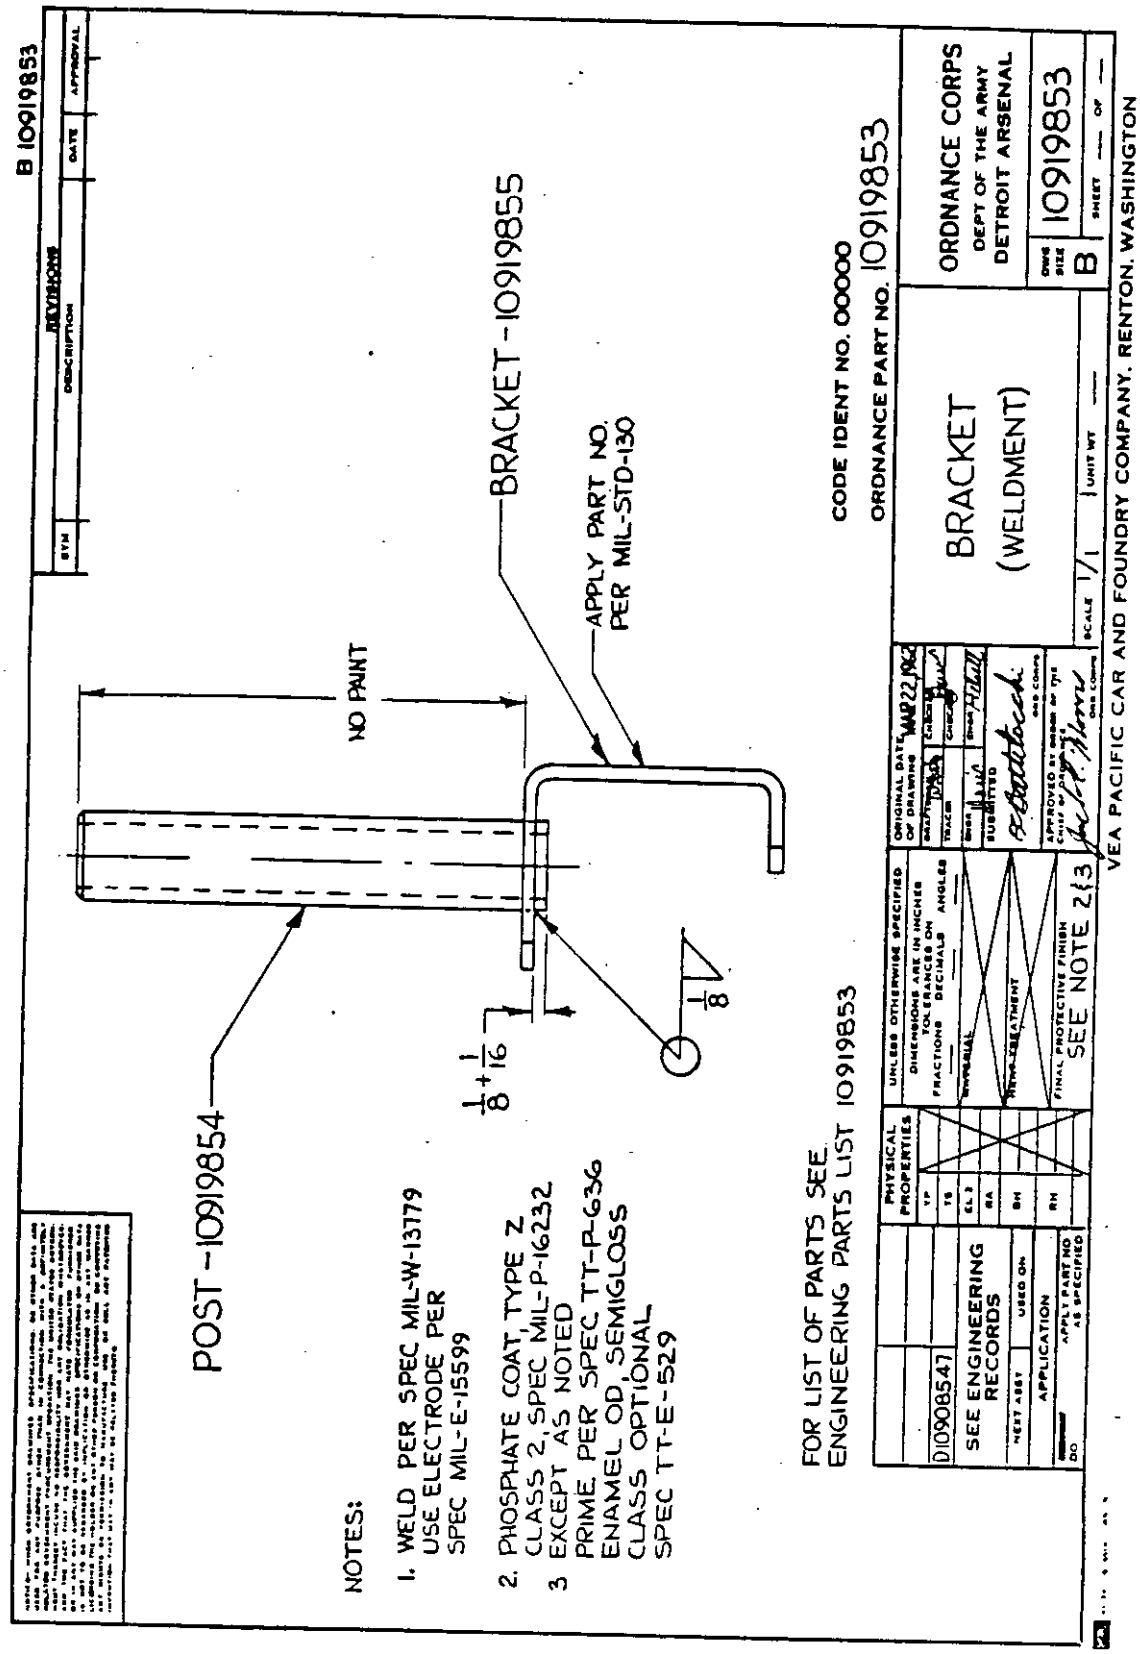


FIGURE 28.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

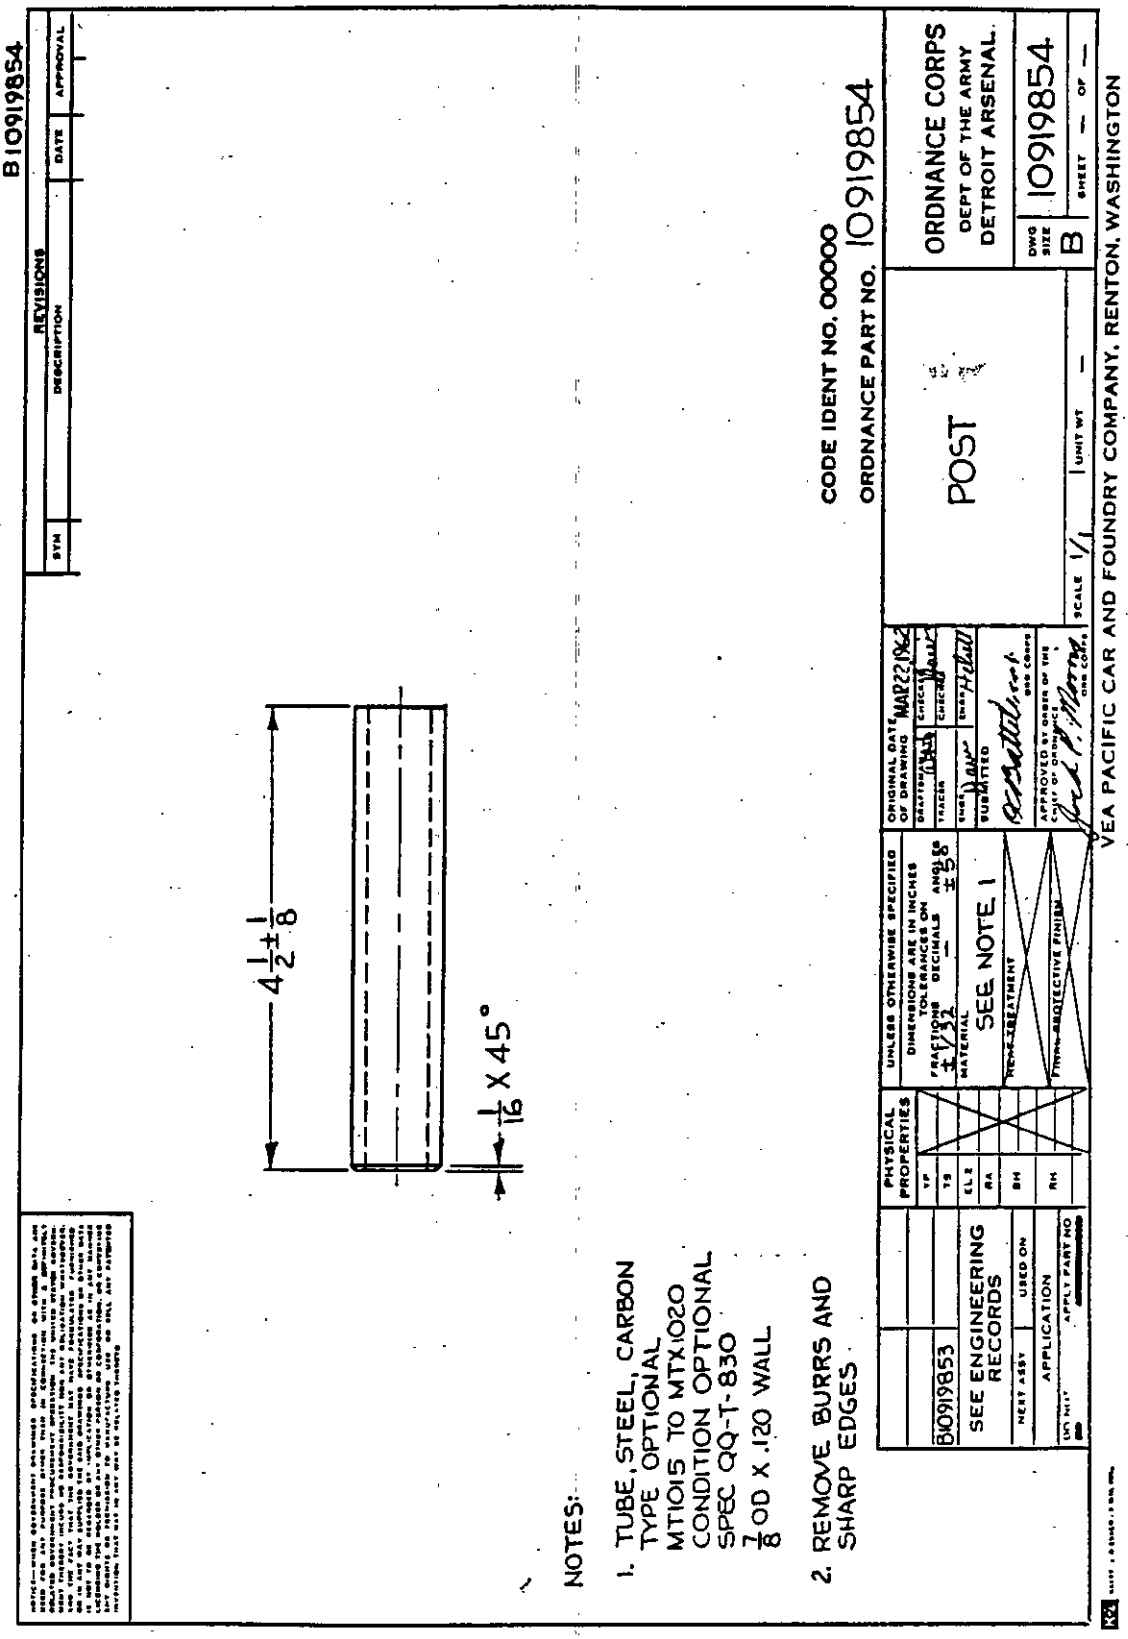


FIGURE 29.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

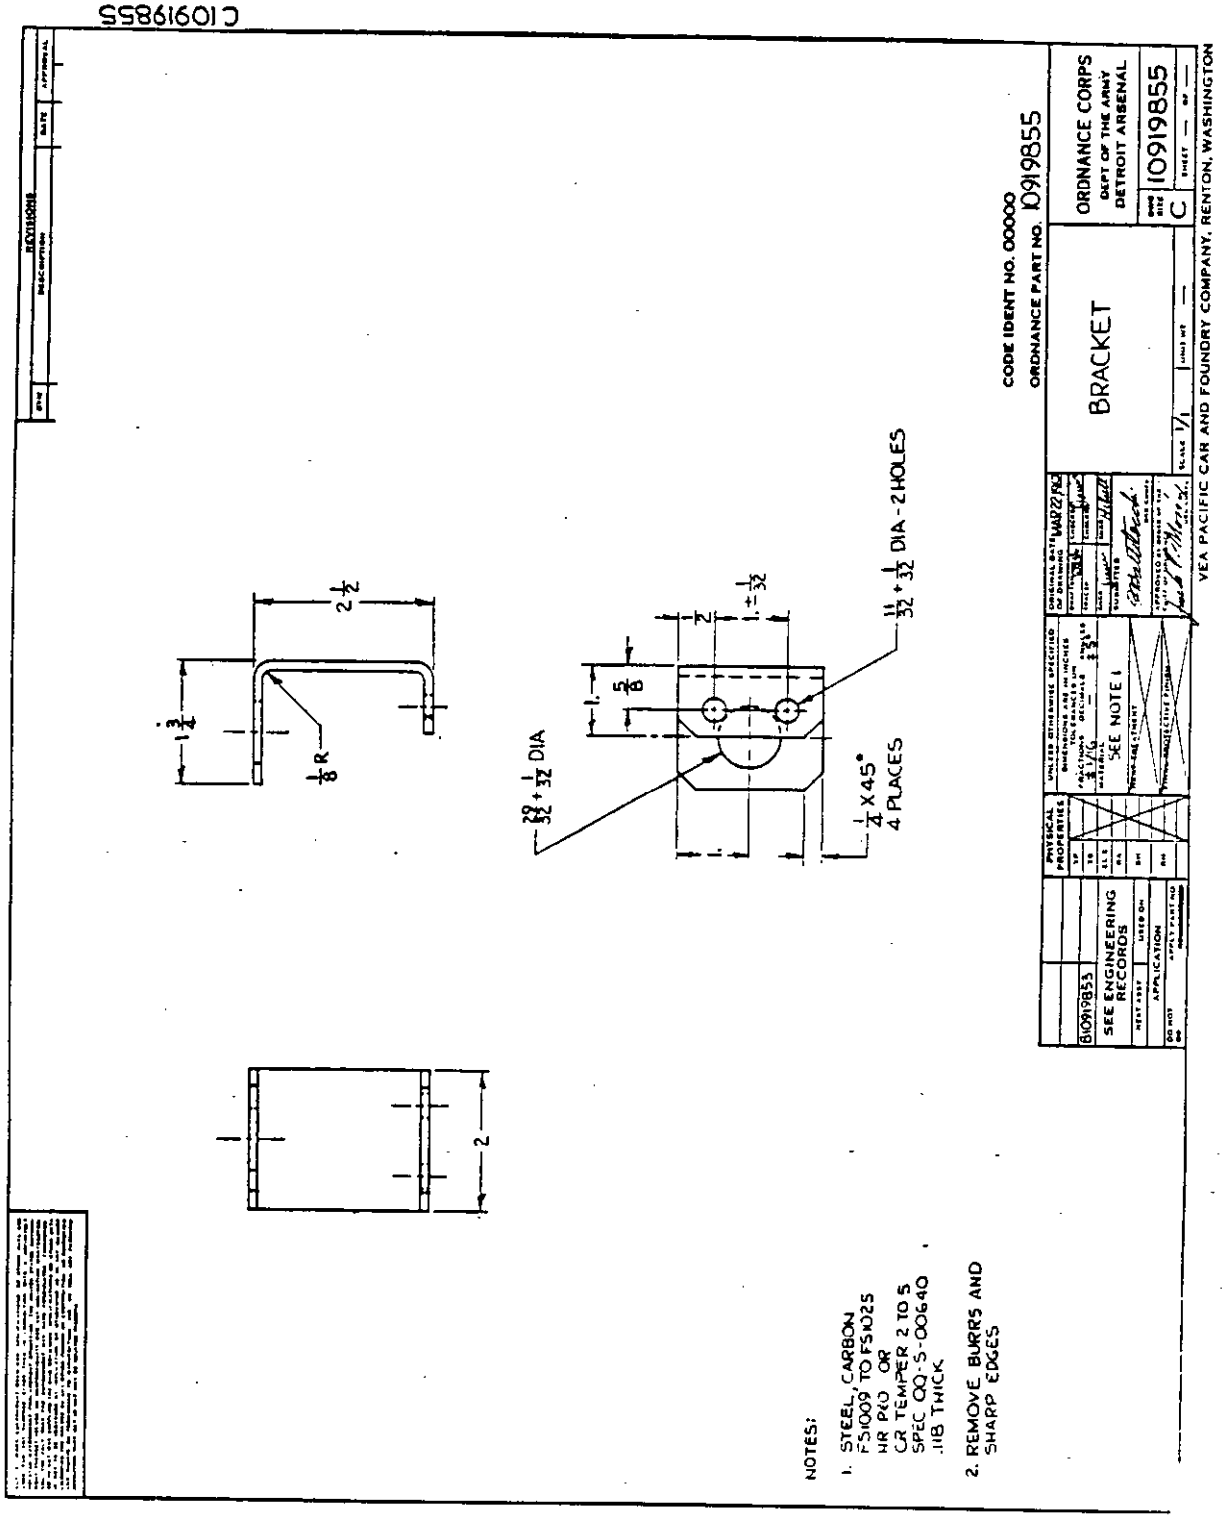


FIGURE 30.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

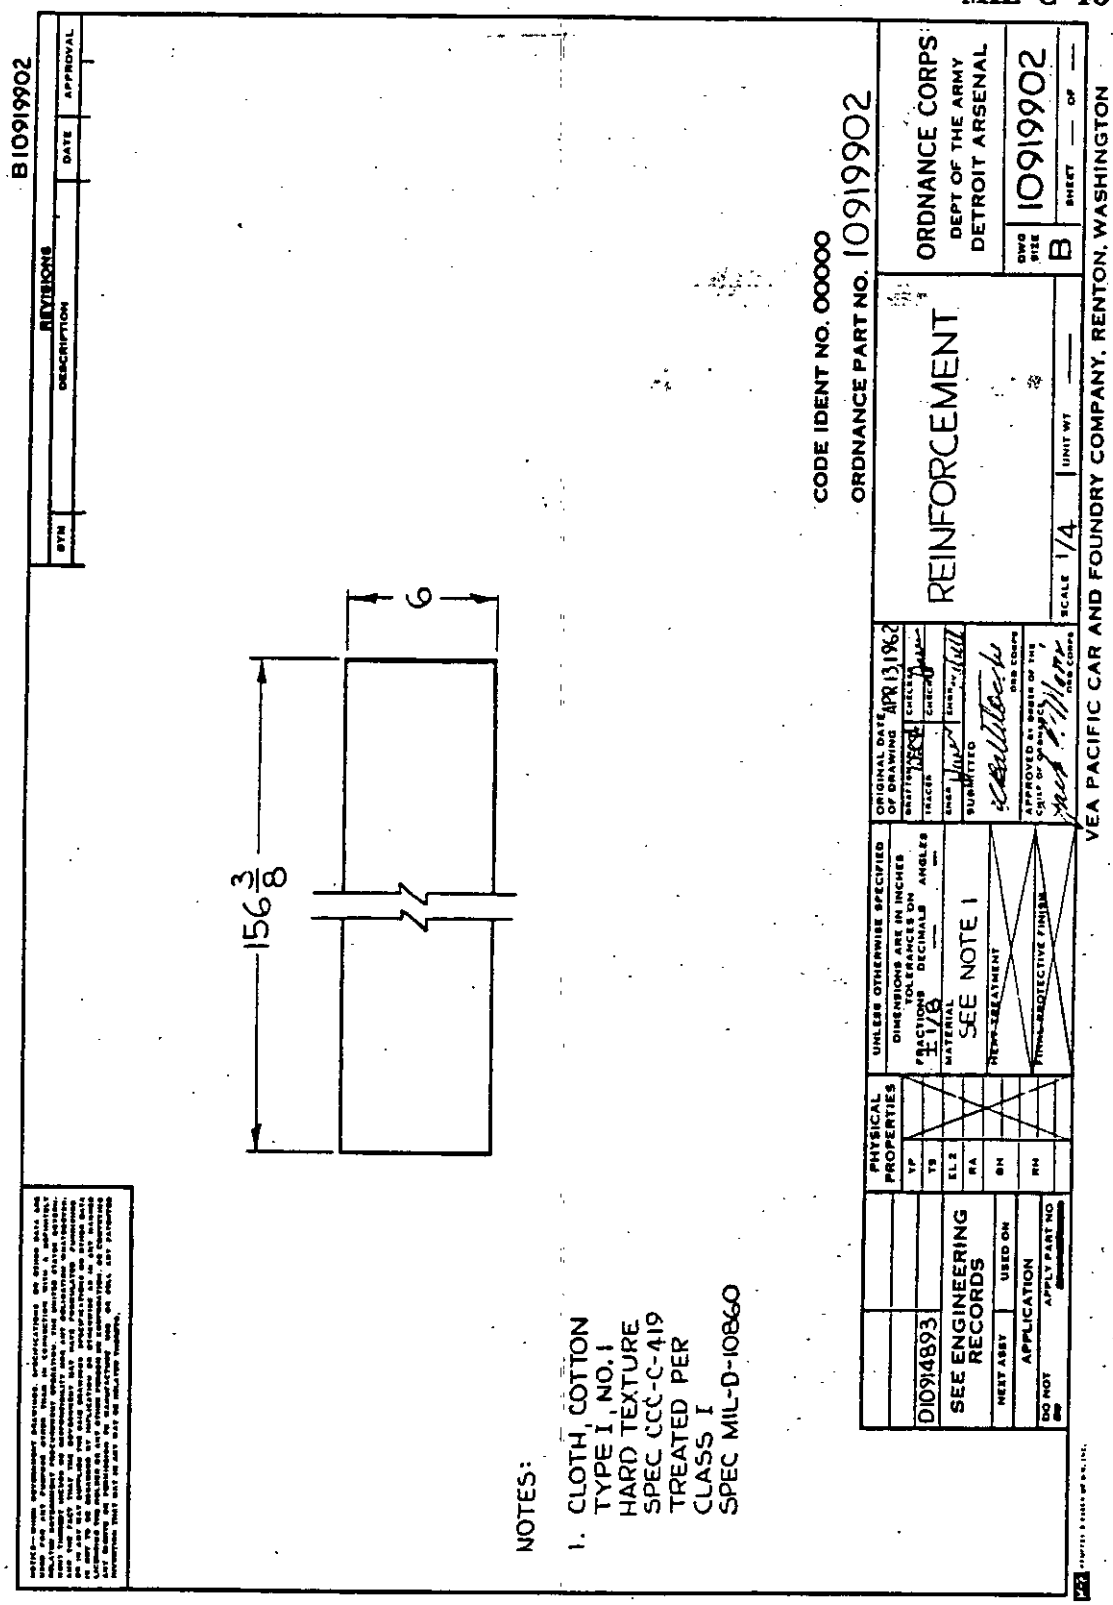


FIGURE 31.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.

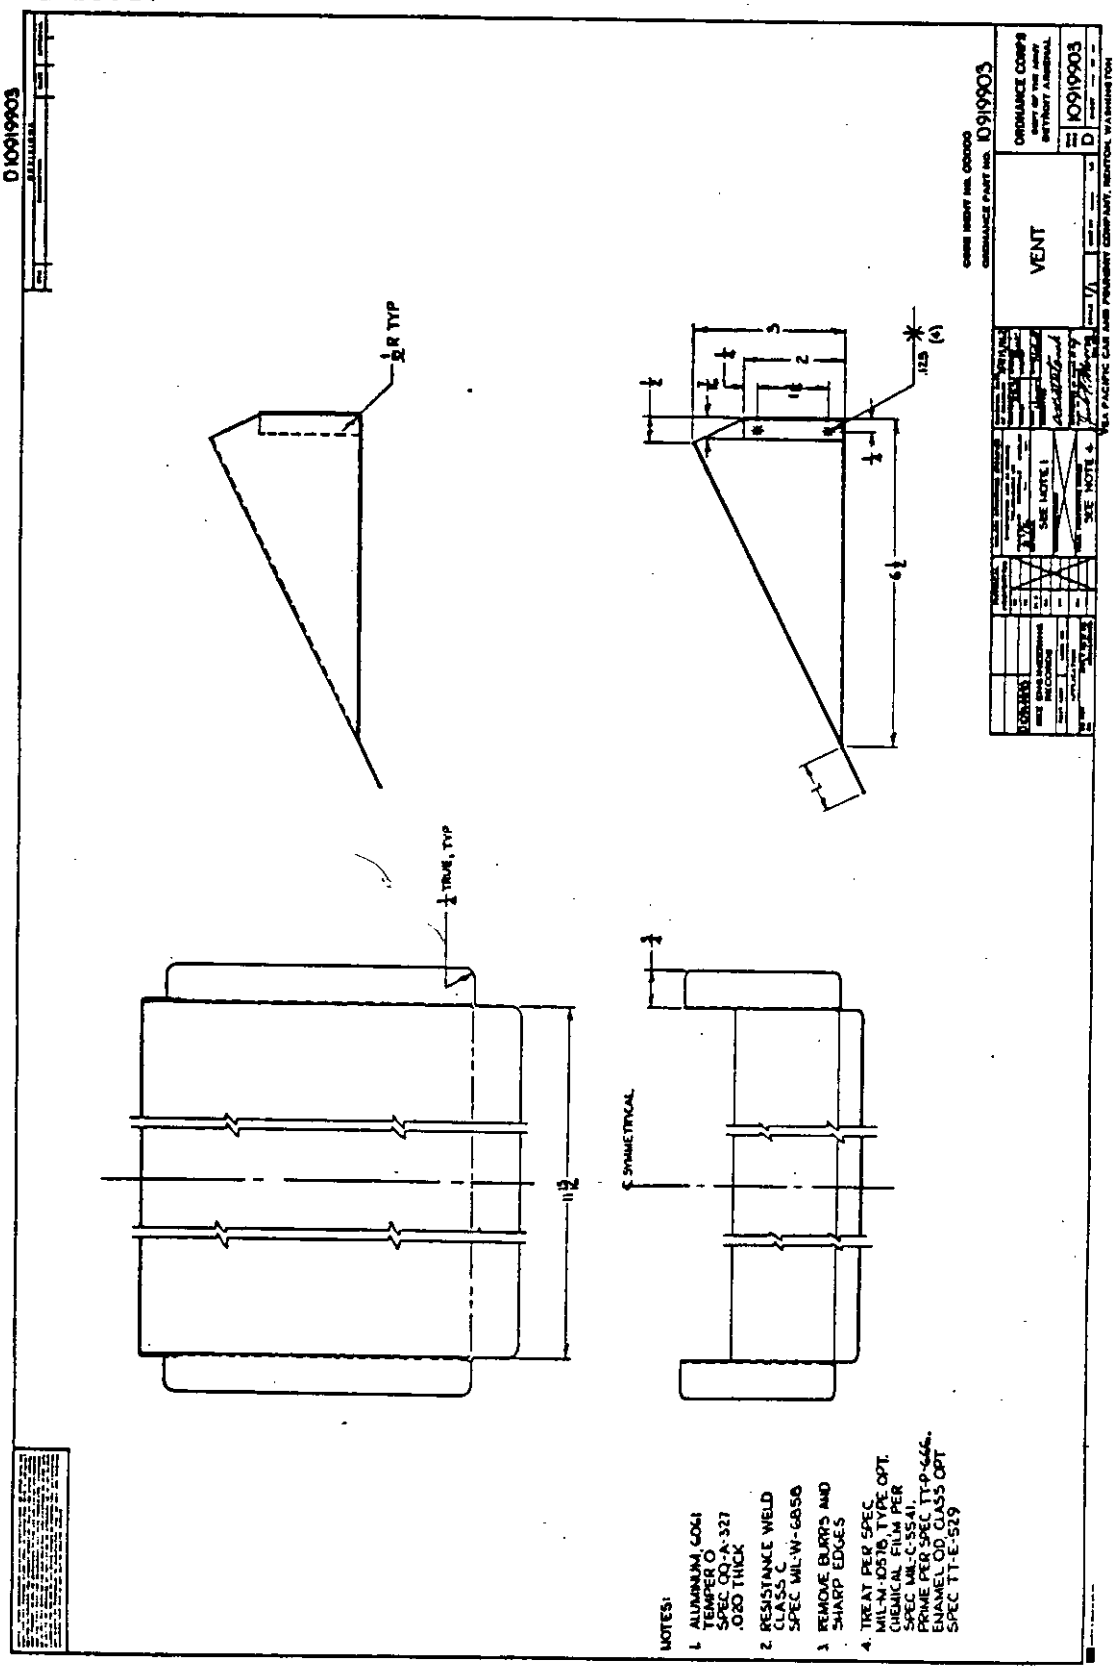


FIGURE 32.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T06:50Z
Check the source to verify that this is the current version before use.