MILITARY SPECIFICATION SHEET

BUR, SURGICAL, TUNGSTEN CARBIDE, 1.5 MM BY 4.5 MM HEAD, SIDE CUTTING, STRAIGHT (SHAPE B), MEDIUM (LENGTH 2)

The complete requirements for acquiring the bur described herein shall consist of this specification sheet and the latest issue of MIL-B-37959 (DM).

REQUIREMENTS

Shall be a side cutting, straight shape, medium shank, surgical buffing bur for use with the medium bur guard in National Stock Number (NSN) 6515-01-116-8197 DRILL, BONE, PNEUMATIC.

Shall be a one-piece bur made of C2 grade tungsten carbide, hot isostatically pressed, with a grain size of 1 to 2 microns.

Shall be examined at 30X magnification for bur defects not readily perceptible to the naked eye.

Shall not break when 6 pounds of force is applied transversely at the tip with the bur supported at the safeline and to the rear of the safeline. Inspection level shall be S-1, with an AQL of 1.0.

Shall be of the design and dimensions shown in figure 1 (7729).

This specification sheet covers the following NSN: 6515-01-139-7729.

Agent:
DLA-DM

Preparing activity:
DoD-MB

(Project No. 6515-2733P)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:43Z
Check the source to verify that this is the current version before use.

APPROVED

GM/WN/TMB

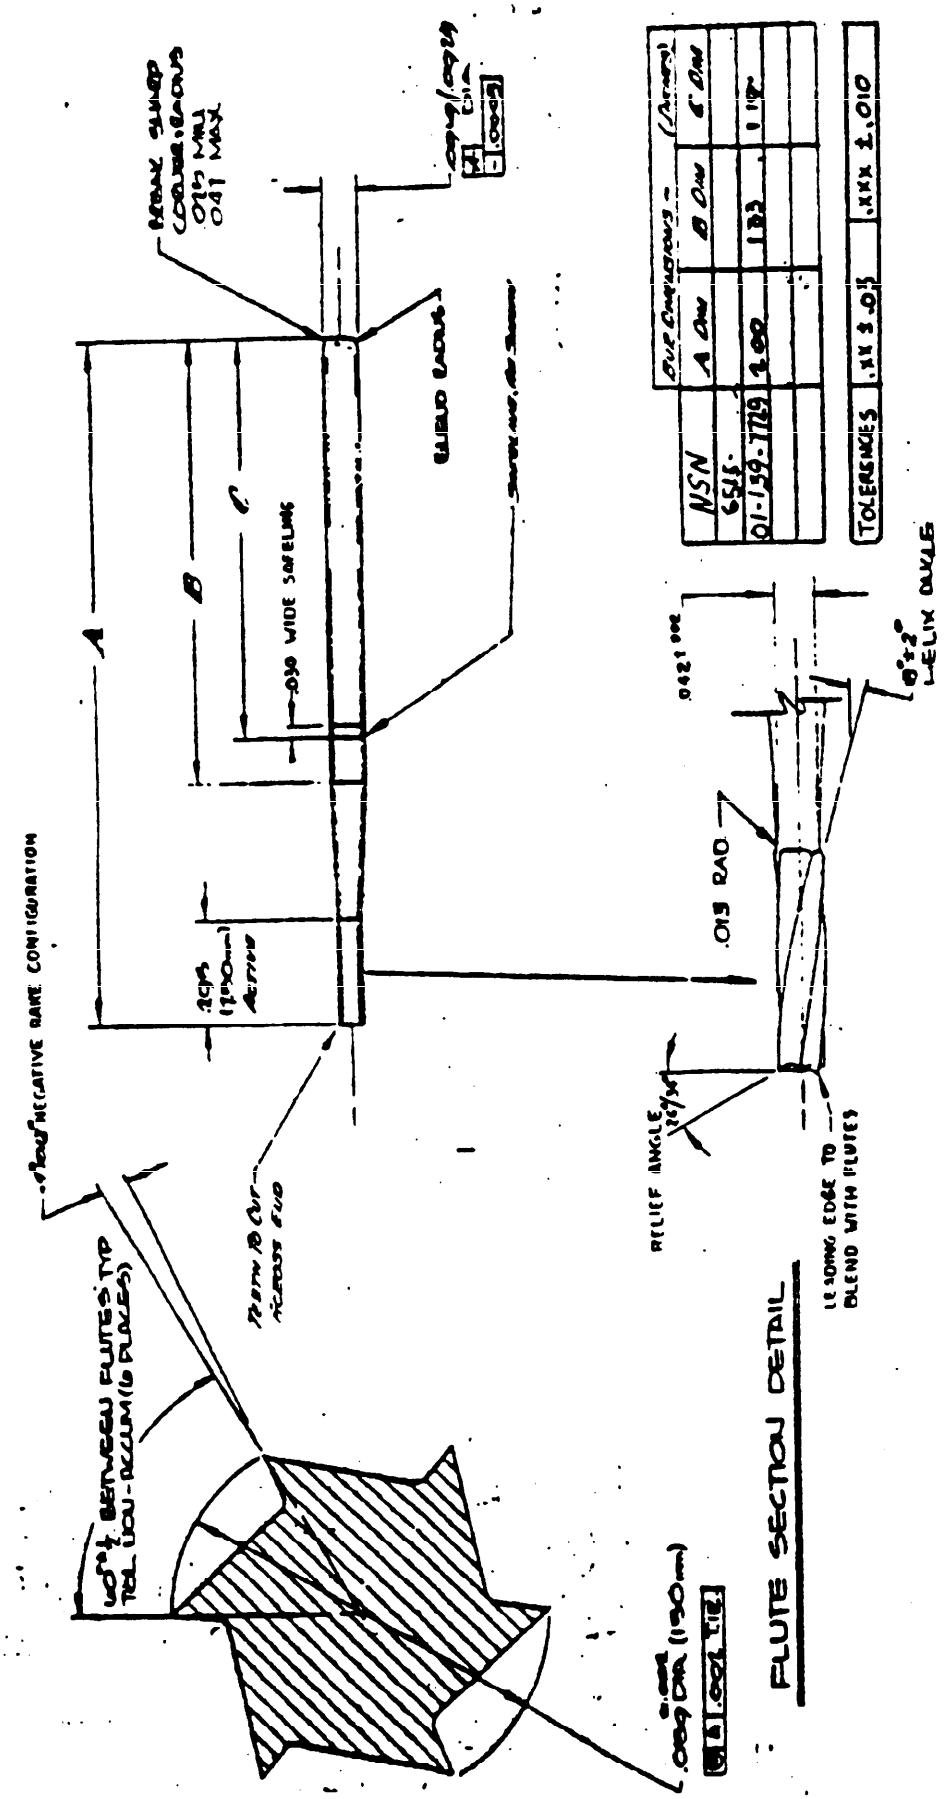


FIGURE 1 (7729)

Bur, surgical, tungsten carbide, 1.5 mm by 4.5 head, shape E, length 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:43Z
Check the source to verify that this is the current version before use.