MIL-B-37959/5(DM)
23 February 1984

MILITARY SPECIFICATION SHEET

BUR, SURGICAL, TUNGSTEN CARBIDE, 2 MM BY 7.5 MM HEAD, SIDE CUTTING, TAPERED (SHAPE C), MEDIUM SHANK (LENGTH 2)

The complete requirements for acquiring the bur described herein shall consist of this specification sheet and the latest issue of MIL-B-37959(DM).

REQUIREMENTS

Shall be a side cutting, tapered shape, medium shank, surgical buffing bur for use with the medium bur guard in National Stock Number (NSN) 6515-01-116-8197 DRILL, BONE, PNEUMATIC.

Shall be a one-piece bur made of C2 grade tungsten carbide, hot isostatically pressed, with a grain size of 1 to 2 microns.

Shall be examined at 30X magnification for bur defects not readily perceptible to the naked eye.

Shall not break when 8 pounds force is applied transversely at tip with the bur supported at and to the rear of the safeline.

Shall be of the design and dimensions shown in figure 1 (7730/7747).

This specification sheet covers the following NSN: 6515-01-139-7730.

Agent:
DLA-DM

Preparing Activity:
DoD-MB

(Project No. 6515-2673P)

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:41Z
Check the source to verify that this is the current version before use.

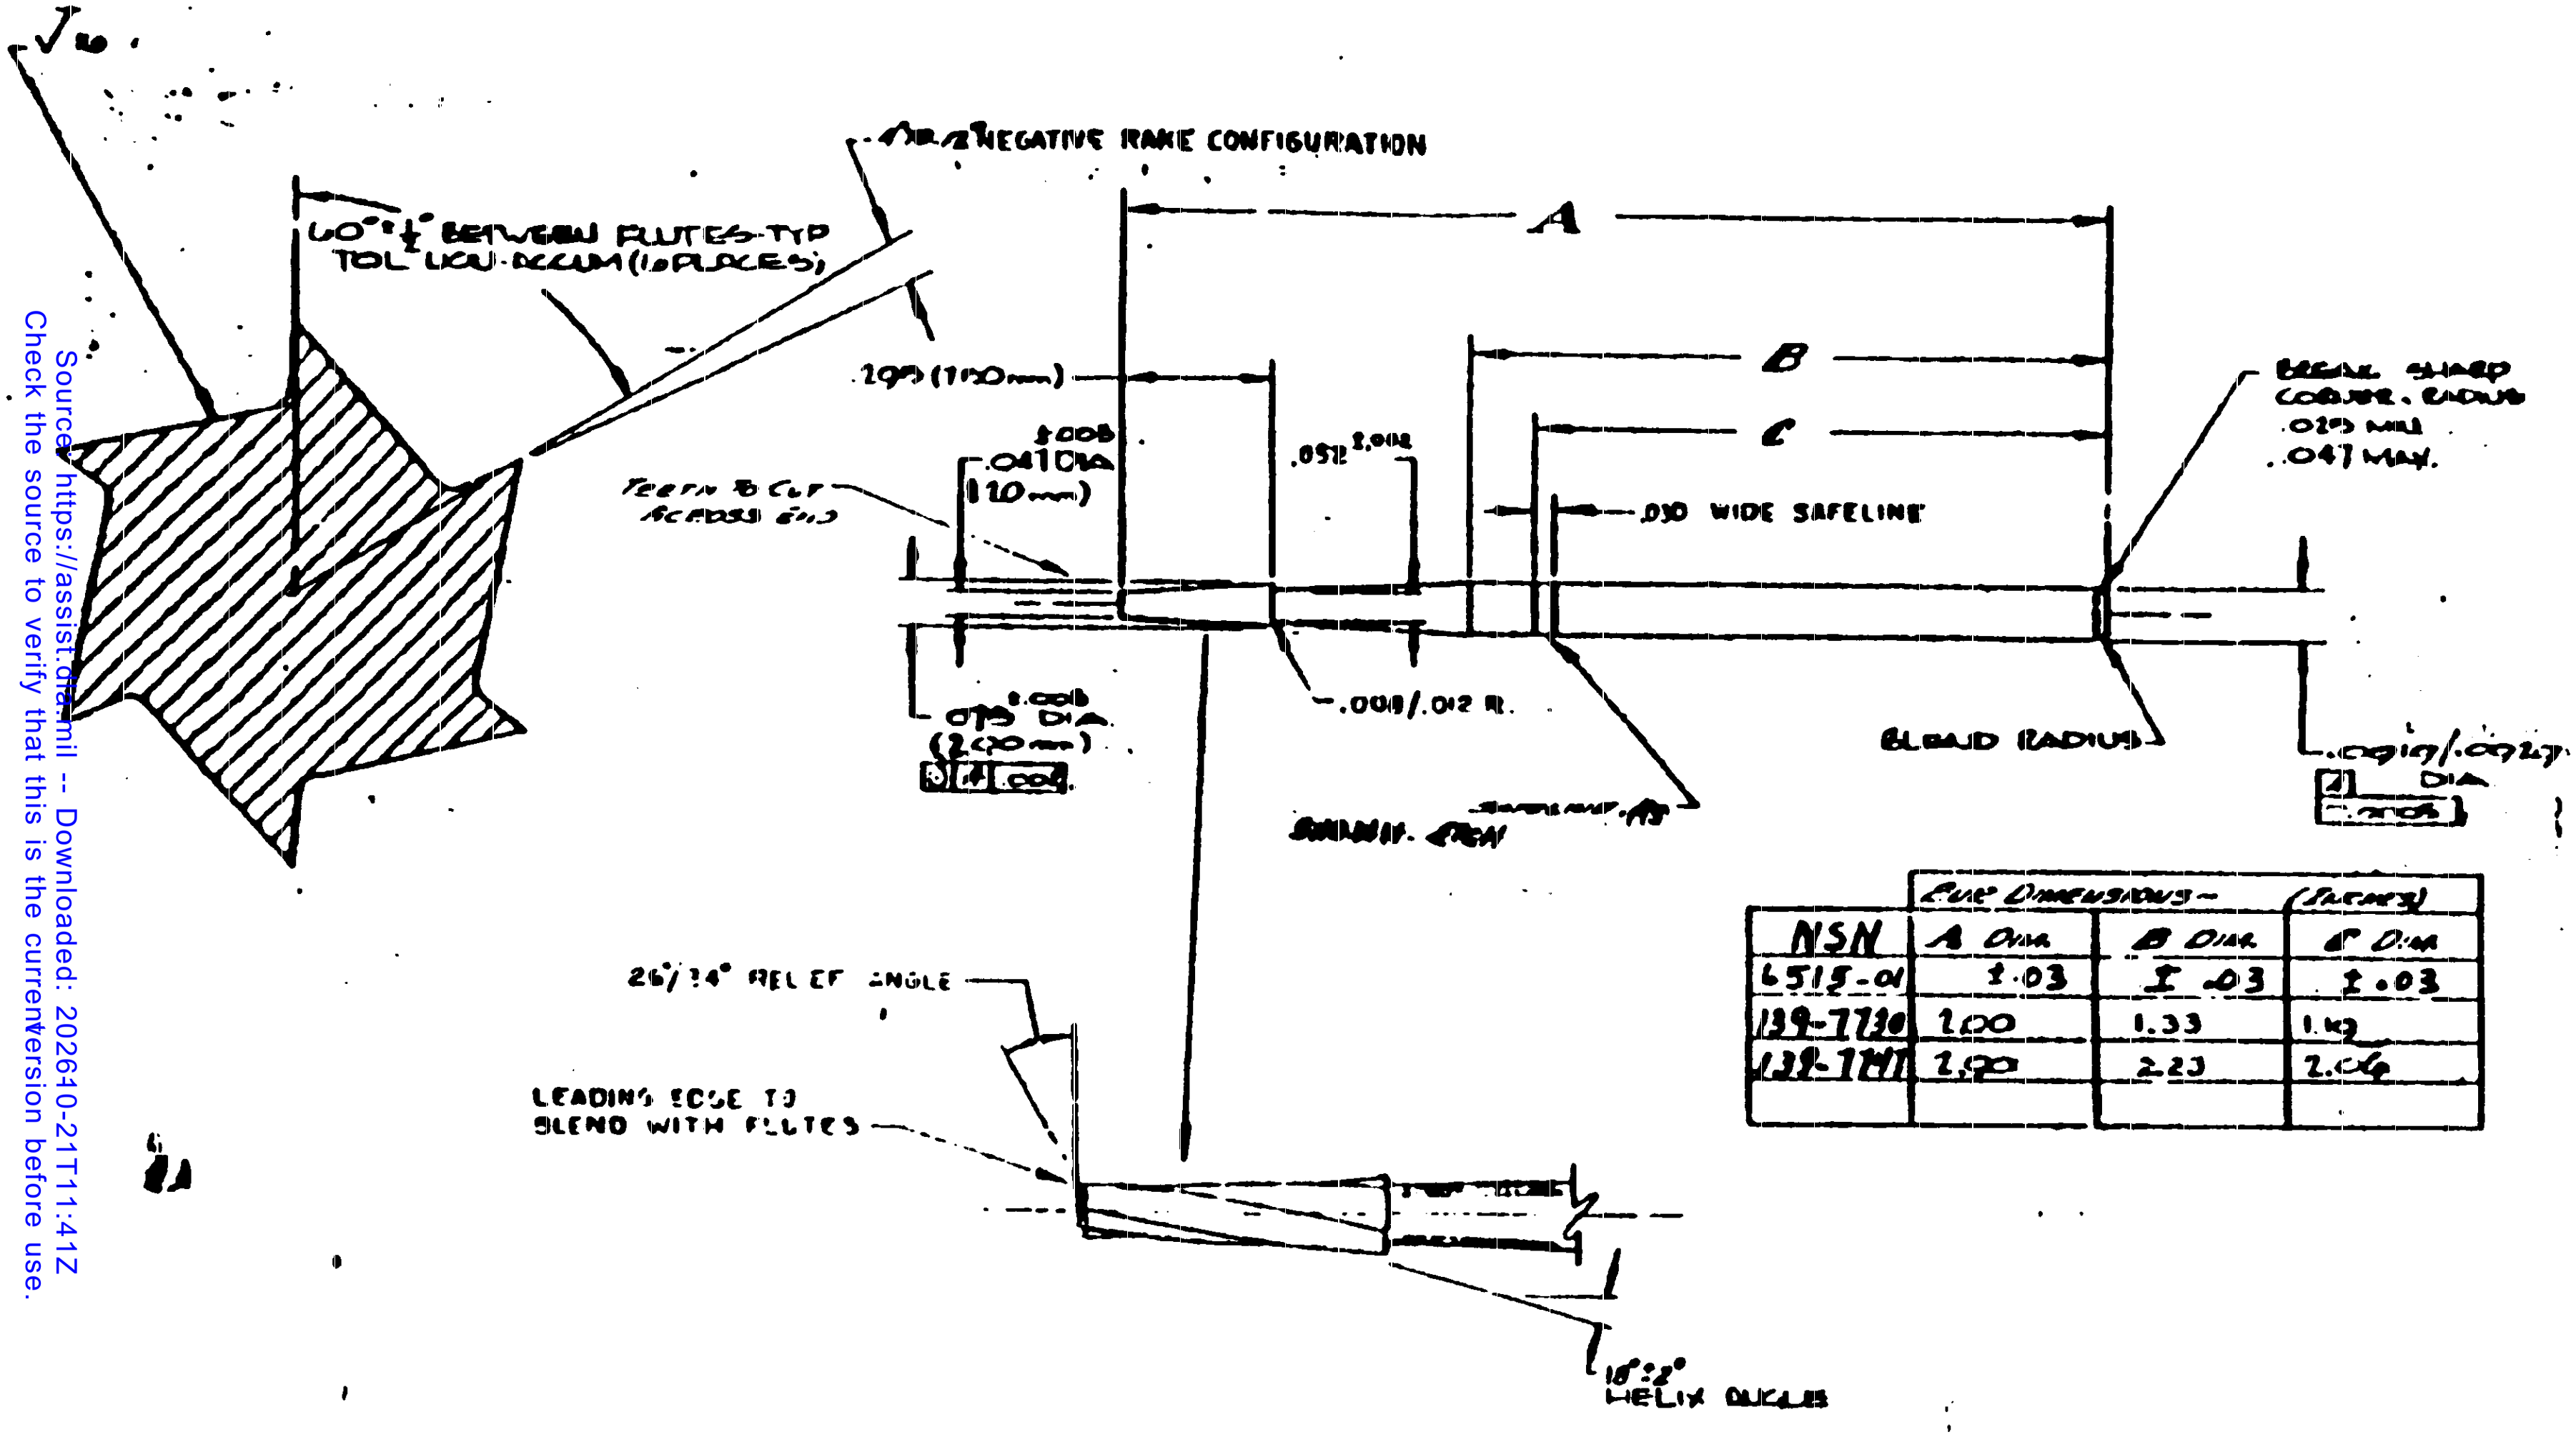

	Cut Dimensions –		(Inches)
NSN	A Dia	B Dia	C Dia
6515-01	±.03	±.03	±.03
139-7730	1.00	1.33	1.42
139-7747	2.00	2.23	2.06

FIGURE 1 (7730/7747)

FIGURE 1 (7730/7747). Bur, surgical, tungsten carbide, 2 mm by 7.5 mm head, shape C, length ?.

Source: https://assist.dla.mil -- Downloaded: 202610-21T11:41Z
Check the source to verify that this is the current version before use.