MILITARY SPECIFICATION SHEET

BUR, SURGICAL, TUNGSTEN CARBIDE, 2 MM BY 7.5 MM HEAD, SIDE CUTTING, TAPERED (SHAPE C), LONG SHANK (LENGTH 3)

The complete requirements for acquiring the bur described herein shall consist of this specification sheet and the latest issue of MIL-B-37959(DM).

REQUIREMENTS

Shall be a side cutting, tapered shape, long shank, surgical buffing bur for use with the long bur guard in National Stock Number (NSN) 6515-01-116-8197 DRILL, BONE, PNEUMATIC.

Shall be a one-piece bur made of C2 grade tungsten carbide, hot isostatically pressed, with a grain size of 1 to 2 microns.

Shall be examined at 30X magnification for bur defects not readily perceptible to the naked eye.

Shall not break when 8 pounds force is applied transversely at tip with the bur supported at and to the rear of the safeline.

Shall be of the design and dimensions shown in Figure 1 (7730/7747).

This specification sheet covers the following NSN: 6515-01-139-7747.

Agent:
DLA-DM

Preparing activity:
DoD-MB

(Project No. 6515-2676P)

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:42Z
Check the source to verify that this is the current version before use.

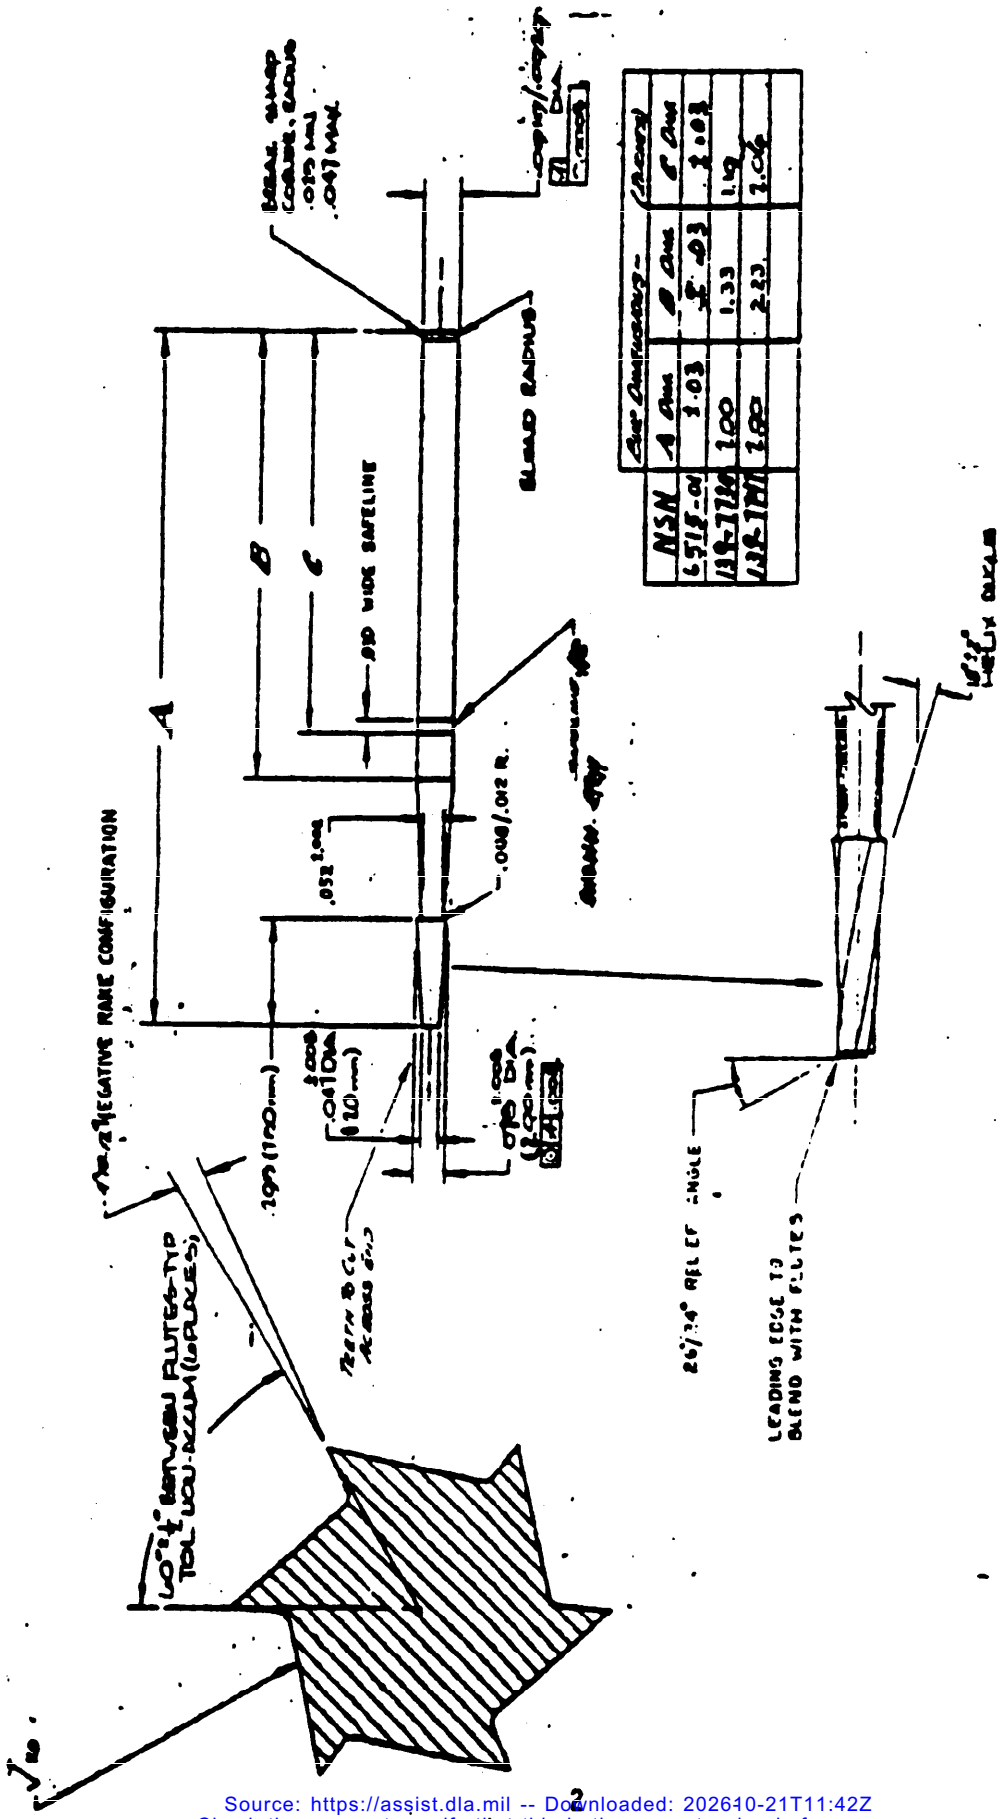


FIGURE 1 (7730/7747)

Bur, surgical, tungsten carbide, 2mm by 7.5mm head, shape C, length 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:42Z
Check the source to verify that this is the current version before use.