MILITARY SPECIFICATION

CASE, SPLINT SET, TELESCOPIC SPLINTS, Cotton Duck, 36 Inches Long by 12 Inches Wide by 7 Inches Deep

This specification is approved for use by the Defense Personnel Support Center, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a canvas case fitted with securing straps and buckles, and used to contain splints and related items.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285	-Thread, Polyester.
CCC-C-419	-Cloth, Duck, Cotton, Unbleached.
CCC-D-950	-Dyeing After-treat Process.
PPP-B-636	-Boxes, Fiberboard.

MILITARY

MIL-F-495	-Finish, Chemical, Black, for Copper Alloys.
MIL-C-496	-Clips, End, Strap.
MIL-W-530	-Webbing, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-B-543	-Buckles, Tongueless and Web Strap.
MIL-T-3530	-Thread and Twine; Mildew Resistant or Water Repellant Treated.
MIL-W-4088	-Webbing, Textile, Woven Nylon.
MIL-F-21840	-Fastener Tapes, Hook and Pile, Synthetic.

Beneficial comments (recommendations, additions, deletions)and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Directorate of Medical Materiel, DPSC-ATT, 2800 South 20th Street, Philadelphia, PA 19100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-TEST-METHOD STD NO. 191	-Textile Test Methods.
FED STD NO. 751	-Stitches, Seams and Stitchings.

MILITARY

MIL-STD-129	-Marking for Shipment and Storage.
MS-16686	-Medical Services Symbol.

DRAWING

DPSC 25083	-Case, Splint Set, Telescopic Splints.

(Copies of specifications, standards and drawing, required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publication. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposals, shall apply.

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Department of Defense Standard Color Card of Official Standardized Shades for Sewing Threads.

(Application for copies should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue,New York, NY 10016).

3. REQUIREMENTS

3.1 Component parts. The case shall consist of a rectangular body with four compartments, with reinforced bottom, and with an attached lid. It shall have carrying handles, a shoulder strap, two straps with end clips, and two buckles. The lid shall be partially secured to the case assembly with hook and pile fasteners.

3.2 Materials. Except as herein specified, materials shall conform to the applicable portions of the specifications, standards, and drawing listed in section 2, and shall meet the requirements shown

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

therein. When materials to be used are not specifically designated, those used shall be of the highest commercial quality, and entirely suitable for the purpose intended.

3.2.1 Duck. The basic material (duck) for the case bottom, lid, and dividers, before finishing shall conform to type III, Army Duck, 14.77 ounces per square yard, as indicated in table II of specification CCC-C-419.

3.2.1.1 Color and treatment. Cotton duck shall be vat dyed Olive Drab No. 7, water repellent and mildew-resistant, conforming to type I, class B of CCC-D-950, except that the cloth shall be made mildew-resistant by treatment limited to two mildew inhibitors only; (a) 2,2' methylene-bis-(4-chlorphenol), or (b) copper-8-quinolinolate, in accordance with the requirement shown in tables II and III of that specification (see 4.4.1.1).

3.2.2 Webbing, cotton. Cotton webbing used as belt loops, straps, and shoulder strap shall conform to the requirements of specification MIL-W-530, shall be type IIb, and shall conform to class 4 of the same specification, except that the amount of copper-8-quinolinolate shall be 1.28 percent. The width of the webbing used for the securing straps, and belt loops shall be 1 inch wide, and the webbing used for the shoulder strap shall be 2 inches wide. Webbing used as the shoulder strap tie shall conform to the same specification, and shall be type IIa, class 4, and shall be 1/2 inch wide. The webbing shall be vat dyed Olive Drab No. 7 (see 4.4.1.2).

3.2.3 Webbing, nylon. The nylon webbing used for the carrying handles shall conform to the requirements of specification MIL-W-4088, shall be type VIII, 1.7 inches wide, and shall conform to class 2 of the same specification. The nylon webbing shall be dyed Olive Drab No. 7.

3.2.4 Thread. The thread shall conform to specification V-T-285 and shall be type I, class 1, size FF. This thread shall be used for both the bobbin and the needle. The thread shall be dyed olive drab, shade S-1, conforming to the U.S. Army Standard Color Card (C.A. 66022).

3.2.5 Buckles, tongueless, double bar. Buckles shall conform to type II, style 4, class 1, construction A or B, size 1-inch, as specified in MIL-B-543. Buckles shall be given a nongloss black finish in conformance with MIL-F-495.

3.2.6 Clips, end. End clips shall conform to type I, class 1, size 1-inch, as specified in MIL-C-496. Clips shall be given a nongloss black finish in conformance with MIL-F-495.

3.2.7 Fasteners, hook and pile. The hook and pile fasteners shall conform to MIL-F-21840 and shall have type II, class 1 hook, and

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

class 1 pile. The hook and pile fastener shall be olive drab color OG-106 as listed in the applicable specification.

3.3 Construction. Except as specified herein, construction shall conform to the requirements as shown on DPSC Drawing 25083, Case, Splint Set, Telescopic Splints. See Figure 1, 2 and 3 for reproduced photographs of the finished case. Contents of case shown in Figure 3 do not apply.

3.3.1 Construction details. All seams and stitching shall be straight, stitch type 301, conforming to FED-STD-751. Stitches shall be formed by machine, evenly spaced, with not less than seven per inch for all seams on the case lid, bottom, sides, ends, and the reinforcing piece on the case bottom. The stitches used to sew the dividers inside the case shall be the same. Stitches on all straps, belt loops, and webbing shall be of the same type and according to the applicable drawing. Hook and pile fasteners shall be sewn to the case bottom and lid on the ends and on the front sides as indicated on the applicable drawing. The ends of each continuous row of stitches (including ends due to thread breaks), shall be anchored by back stitches for a length of not less than 1 inch, except where anchorage is provided by another seam or stitching. Thread tension shall be properly maintained so that lock will be imbedded in the middle of the material sewed. Sufficient spare loop shall be provided to allow for free motion of the attached buckle. End clip shall be firmly attached without cutting webbing, which shall be inserted full depth and lie flat at point of entry.

3.4 Marking for identification. Each case shall be permanently and legibly marked in black as follows:

On the outside of the case on the lid, there shall appear a 3-inch diameter Medical Services Symbol as shown for type I in Standard MS 16686. The symbol shall face the front of the case and be centered from end to end and front to back.

On the outside of the case, on the lid below the Medical Services Symbol and parallel to the front edge of the lid of the case, there shall appear in 1-inch black letters, this item identification: SPLINT SET, TELESCOPIC SPLINTS.

The item identification shall be centered from end to end and lie on a line parallel to the front edge of the lid on the case 1 inch from the front edge. The bottom of the letters shall lie on this line so that the item identification appears upright when the lid of the closed case is viewed from the front.

On the inside surface of the lid of the case, there shall appear either the name of the manufacturer or registered trade-mark in block letters 1/2-inch high, and the contract number. The marking shall be centered with respect to the long dimension of the lid of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

case. It shall measure approximately 2 inches from the back edge of the lid of the case, to the bottom of the letters. The lettering shall appear upright when the opened case is viewed from the front.

3.5 Workmanship. Workmanship shall be first class throughout. Completed cases shall be well made and free from defects which detract from their appearance or may impair their serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification to assure supplies and services conform to prescribed requirements.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of 3 years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual or auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the fabric, thread, buckles and clip ends, may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the NSN, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requrements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

4.2 Sampling. Sampling shall be conducted in accordance with MIL-STD-105 and table I.

TABLE I. Sampling.

For visual examination	Inspection level	AQL (percent defective)	Minimum sample size
Major A defects	II	1.0	---
Total A defects (Major A and Minor A combined)	II	4.0	---
Major B defects	S3	1.0	---
Total B defects (Major B and Minor B combined)	S3	4.0	---
For dimensional examination.			
Major C defects	S2	1.0	---
Total defects (Major C and Minor C combined)	S2	4.0	---
For component material testing.	S1	*	5

*Acceptance number shall be zero (0) for all sample sizes.

4.2.1 Component materials. Sufficient samples of the component materials shall be selected from each lot of material used in the manufacture of the case to perform tests as required by the applicable subsidiary specifications and by tests specified herein. When sample size for component materials covered by the subsidiary specifications is not specified, the sample size for each test shall be as indicated in 4.2. The unit of product for testing shall be the quantity of material necessary to perform all required tests one time each, taking into consideration the fact that, where possible, the same material may be used for the determination of two or more test characteristics. Units of product are expressed in multiples of the following:

Duck----------Yards or fractions of a yard
Webbing----------Yards or fractions of a yard
Thread----------Cones or spools
Buckles----------Each
End clips----------Each

4.3 Examination. The cases shall be examined to determine compliance with all requirements contained in this specification. Non-conformance with these requirements will be permitted to the extent indicated in 4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

4.3.1 Classification of defects. Examination shall be conducted in accordance with table II classification of defects:

TABLE II. Classification of defects.

Categories	Defects
Major A	
101	Duck not free of holes, spreading, and weak spots.
102	Marking not present.
103	Webbing not free of soft spots.
104	Clips not secure on webbing.
105	Marking not in proper location.
Major B	
151	Stitching of lid to the bottom of the case not continuous (not corrected by backstitching).
152	Ends of stitching not anchored by backstitching or another seam of stitching.
153	Webbing stitches to body not continuous (not corrected by backstitching).
154	Hook and pile fasteners do not line up when case is closed.
Major C	
191	Overall dimensions not as specified.
Minor A	
201	Duck not free of dirt, grease, or other stains.
202	Hems uneven.
203	Textile color not uniform.
204	Buckles not nongloss black.
205	Clips not nongloss black.
206	Webbing not evenly woven.
207	Clips not free of sharp burrs and projections.
208	Buckles do not move freely.
Minor B	
251	Hems not continuously stitched.
252	Stitches not minimum number required.
253	Stitching not correct type.
Minor C	
291	Locations of webbing not correct.
292	Dimensions (not previously enumerated) not as specified.

**Examination is not restricted to the classified possible defects listed above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

4.3.2 Packaging inspection. The inspection of the packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.4 Tests. Tests of the materials used in the fabrication of the cases shall be made as specified herein. Other tests may be made, as necessary, to determine that the finished cases comply with this specification, and that the materials comply with the applicable portions of the specificatons, standards, and drawing listed in section 2.

4.4.1 Material testing.

4.4.1.1 Cloth, cotton, duck. The unfinished duck shall be tested in accordance with test procedures of CCC-C-419 (see 3.2.1). The finished duck shall be tested in accordance with test procedures of CCC-D-950 except that performance of the tests for mildew-inhibitor content and mildew-resistance shall be conducted under the following conditions:

(a) If the material conforms to the requirements for mildew-inhibitor content, the mildew-resistance tests shall not be performed, and the material shall be considered as complying with mldew-resistance requirements.

(b) If the mildew-inhibitor content exceeds the maximum requirement, the material shall be rejected.

(c) If the mildew-inhibitor content is found to be below the minimum requirement, the material may be accepted with respect to mildew-resistance provided it passes the mildew-resistance test, method 5762 of Fed. Test Method Std. 191. When the mildew-resistance test is performed, the leaching process shall be omitted, and the breaking strength shall be determined by method 5100 of Fed. Test Method Std No. 191.

4.4.1.2 Webbing. The cotton webbing shall be tested in accordance with the test procedures of MIL-W-530, except as indicated in 4.4.1.2.1 below. The nylon webbing shall be tested in accordance with the test procedures of MIL-W-4088.

4.4.1.2.1 Water absorption. The finished cotton webbing shall be tested for water absorption by method 4500 as specified in the test section of MIL-W-530, erxcept that the size of the specimen and the size of the blotting paper shall conform to method 5502 of Fed. Test Method Std. No. 191.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

4.4.1.3 Thread. Polyester thread shall be tested as specified in V-T-285.

4.4.1.4 Fastener, hook and pile. The hook and pile fastener shall be tested in accordance with the test procedures of MIL-F-21840.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. One case constitutes a unit of issue.

5.1.2 Level A.

5.1.2.1 Unit packaging. Each case shall be clean, dry and neatly folded to an approximate dimension of 14 inches by 14 inches and packaged in a box conforming to PPP-B-636, class domestic. Closure shall be as specified in the appendix of the box specification.

5.1.3 Level C. Each case shall be clean, dry and packaged in a manner that will afford adequate protection against deterioration and physical damage during shipment from the supply source to the receiving activity.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Each case packaged as specified in 5.1.2.1 shall require no further packing except the unit package shall conform to PPP-B-636, class weather-resistant. In addition, the closure, waterproofing and strapping shall be as specified in the box specification.

5.2.2 Level B. Each case packaged as specified in 5.1.2.1 shall require no further packing.

5.2.3 Level C. Cases packaged as specified in 5.1.3 shall be packed in shipping containers in a manner that will afford adequate protection against damage during shipment from the supply source to the receiving activity. These packs shall conform to the carriers rules and regulations.

5.3 Marking. Marking shall be as specified in MIL-STD-129. When Level A packaging and level A packing is specified, the level of protection shall be shown as "A" in lieu of A/A. When level A packaging and level B packing is specified, the level of protection shall be shown as "B".

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Case, Splint Set, Telescopic Splints, Cotton Duck, is intended for use in the field for carrying splints and related items. This case is the container for NSN 6545-00-952-6975, Splint Set, Telescopic Splints.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) National Stock Number (NSN).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 This specification covers the following item listed in the Federal Supply Catalog:

National Stock Number	Item Identification
6545-01-071-6745	CASE, SPLINT SET, Cotton Duck, 36 inches Long, by 12 inches Wide by 7 inches Deep with Flaps Folded, Telescopic Splints.

Preparing activity:
DLA-DM

Project No.: 6545-0045

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

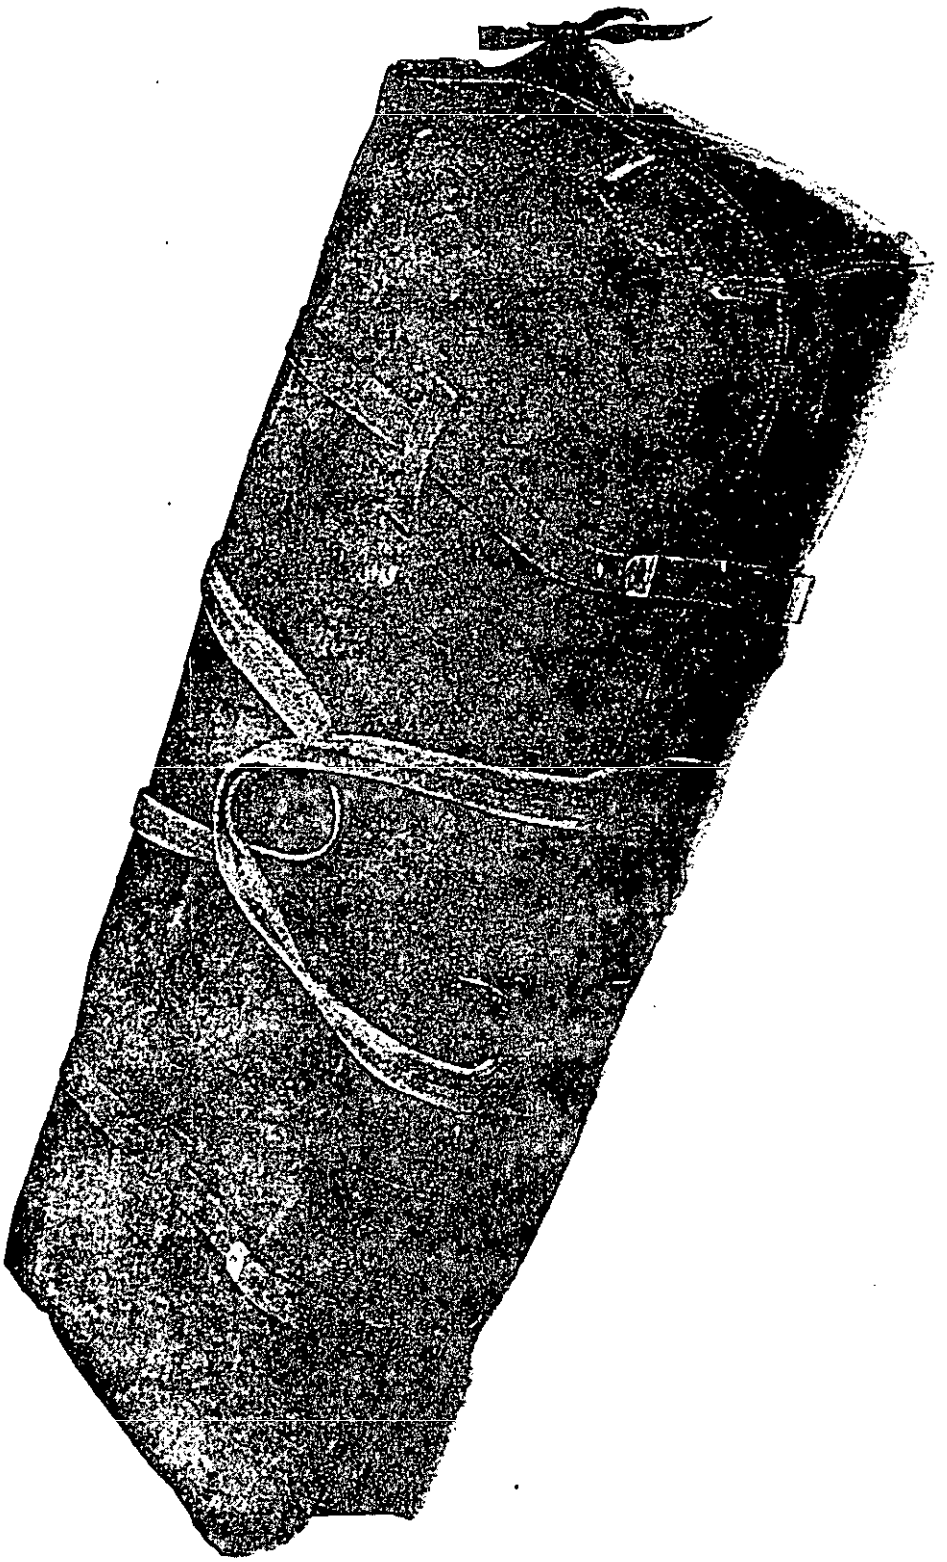


FIGURE 1. Case, Splint Set, Telescopic Splints (showing case closed).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

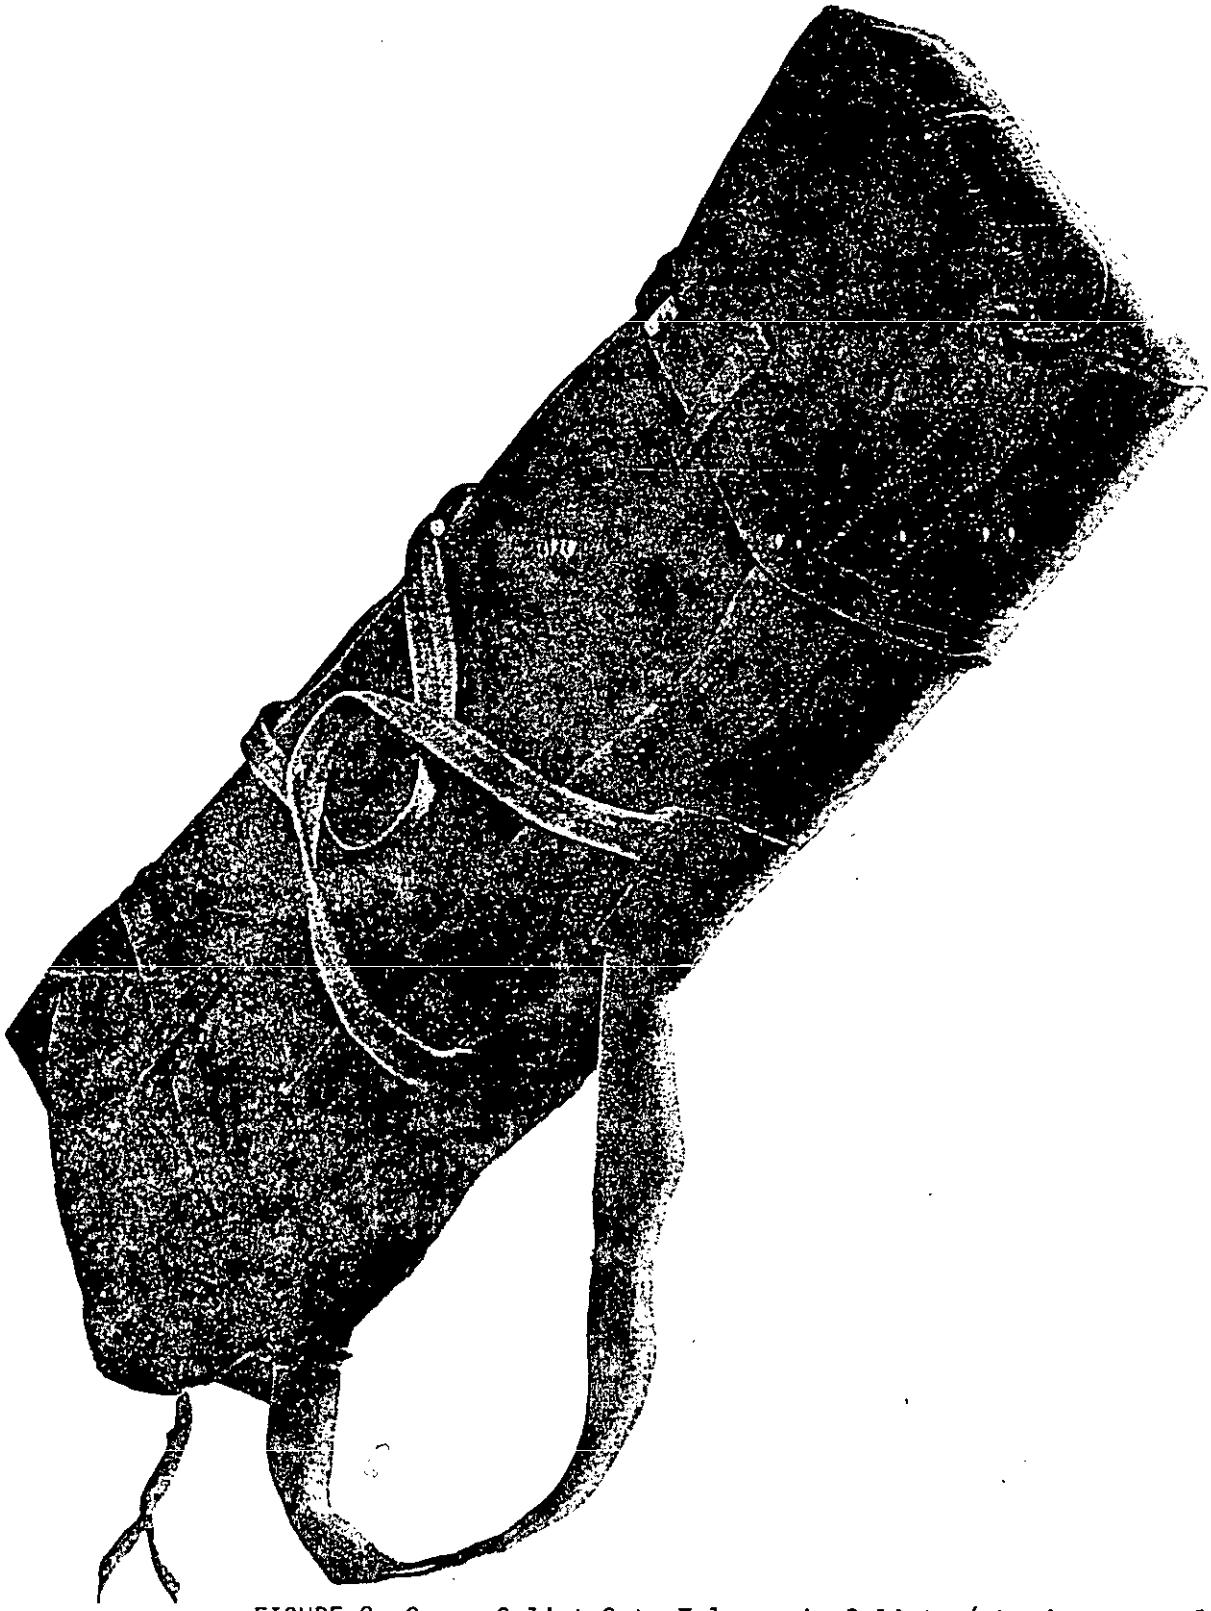


FIGURE 2. Case, Splint Set, Telescopic Splints (showing case closed)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

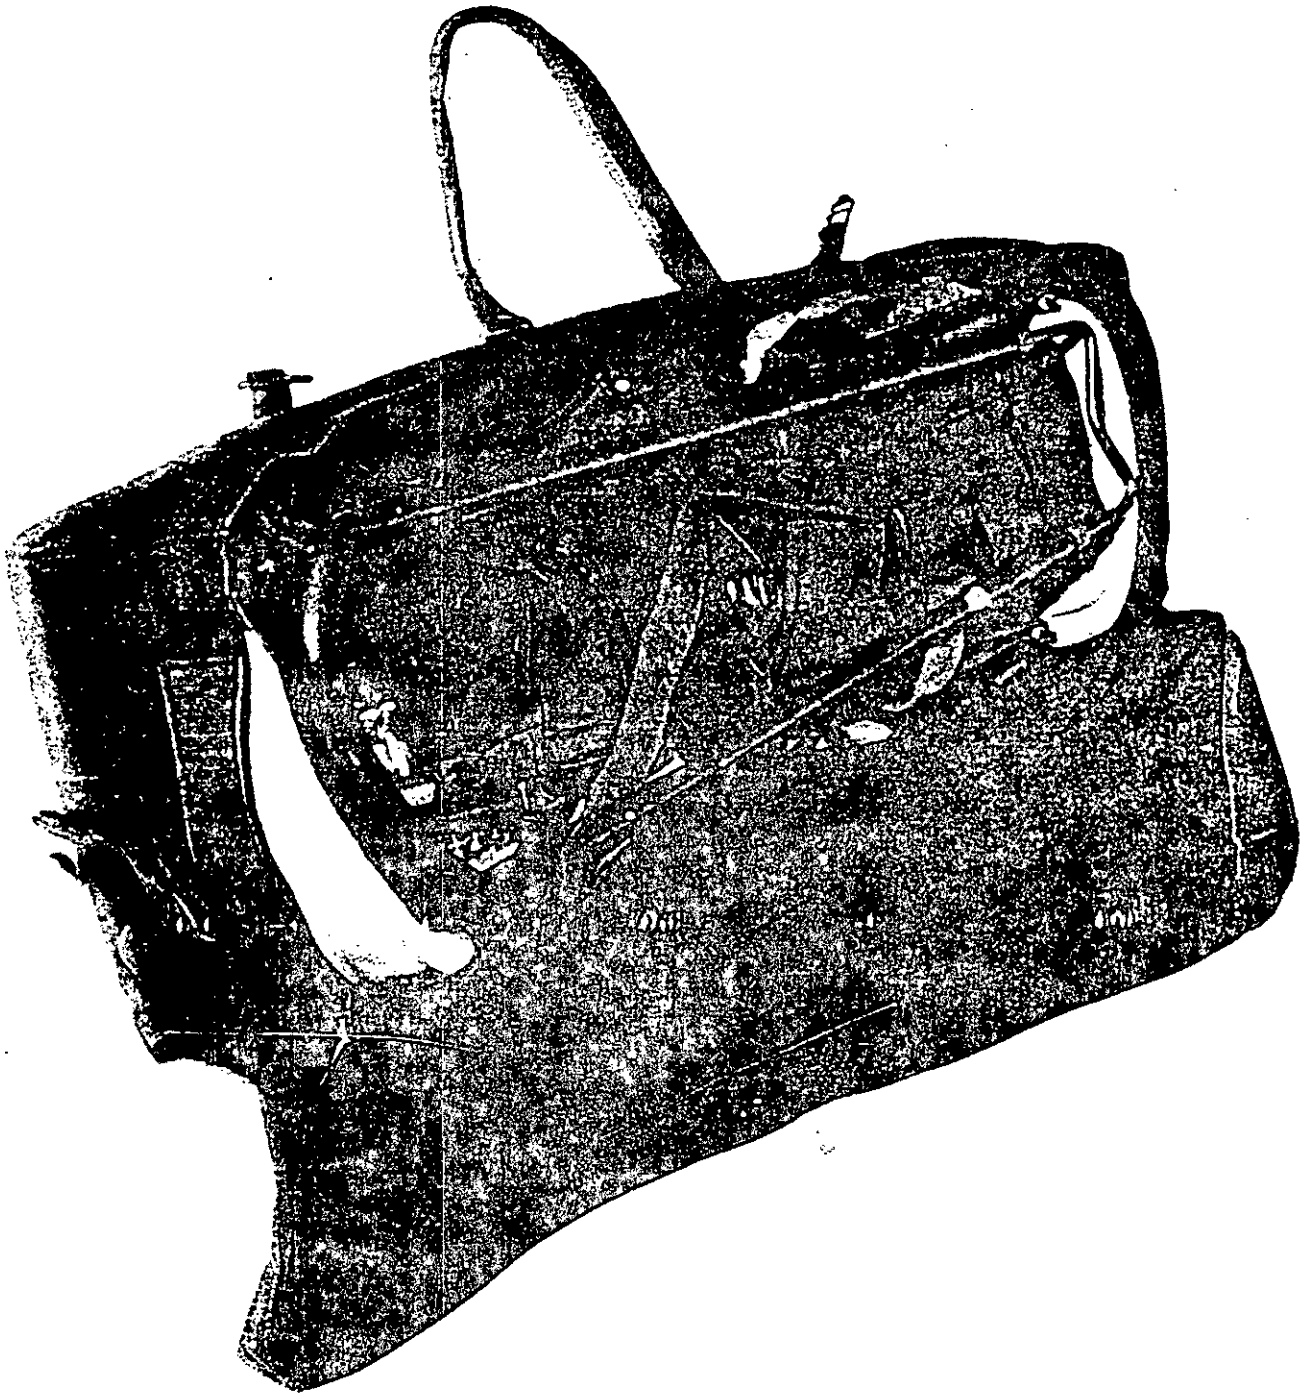


FIGURE 3. Case, Splint Set, Telescopic Splints (showing case open)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and *enhance its use. DoD contractors, government activities,* manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE

CASE SPLINT SET TELESCOPIC SPLINTS (MIL-C-37946(DLA-DM)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:39Z
Check the source to verify that this is the current version before use.