MILITARY SPECIFICATION

SMOCK, MEDICAL ASSISTANT'S, MAN'S, WHITE, COTTON-POLYESTER, DURABLE PRESS

This specification is approved for use by The Defense Logistics Agency, Department of Defense, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for one type of durable press, cotton-polyester, white, man's, medical assistant's smock in various sizes.

1.2 Classification. The medical assistant's smocks shall be furnished in the following sizes, as specified below:

Size
Small
Medium
Large
Extra Large

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2) the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Defense Personnel Support Center, Directorate of Medical Materiel, DPSC-ATT, 2800 South 20th Street, Philadelphia, PA 19101 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple (Plastic)
UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-T-43548	-	Thread, Polyester, Cotton-Covered and Rayon Covered
MIL-T-43624	-	Thread, Polyester, Spun

STANDARDS

FEDERAL

FED TEST METHOD	-	Federal Standard for Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

Technical Manual of the American Association of Textile Chemists and Colorists (AATCC)

(Application for copies should be addressed to AATCC National Headquarters, P. O. Box 12215, Research Triangle Park, NC 27709.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION AGENT

NATIONAL MOTOR FREIGHT TRAFFIC CLASSIFICATION

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

UNIFORM FREIGHT CLASSIFICATION

(Application for copies should be addressed to the Uniform Classification Committee, Room 202, Union Station, 516 W. Jackson Blvd., Chicago, IL 60606.)

STANDARD COLOR CARD OF AMERICA

(Application for copies should be addressed to the Textile Color Card Association of the United States, Inc., 200 Madison Avenue, New York City, New York 10016.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable specification sheet. In the event of any conflict between the requirements of this specification and the specification sheet, the latter shall govern.

3.2 Alternate combination label. As an alternate, the combination size and identification label shall be constructed of cloth cotton coutil or poplin having a nominal greige weight of 2.11 yards per pound based on 45 inch width. The basic cloth shall be dyed (see 3.1.6.2). The label shall be printed in black by rotogravure to withstand repeated laundering and retain legibility throughout the useful life of the garment to which the label is attached. The label shall be a sew-on type. The label shall be of adequate size to contain the item description, contract number, size, National Stock Number, and any information required by the Fur, Wool, or Fiber Products Act, as appropriate. The size and type of print shall be as specified for type I, classes 1 and 2 label of DDD-L-20.

3.3 Color. The combination size and identification label shall be vat or naphthal dyed one of the following colors for the appropriate size:

Primitive Green (cable No. 70167)	for Extra Large Size
Indian Orange (cable No. 70072)	for Large Size
Lemon Yellow (cable No. 70205)	for Medium Size
Peach Blossom (cable No. 70098)	for Small Size

The cable series are from the Standard Color Card of America.

3.4 Colorfastness. The finished dyed labels shall show good colorfastness to laundering transference and fair colorfastness to accelerated laundering. the printing shall be clearly legible after being tested as specified in section 4 of DDD-L-20.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

3.5 Instruction label. The laundry instruction label shall conform to type 1, class 3 of DDD-L-20, except the content of instruction shall be as follows and the color shall be yellow, Cable Nos. 70208 or 70205.

Durable press

1. For machine washing, use wash and wear cycle or durable press cycle. Wash with moderately hot water (140°F), using soap or mild detergent.

2. For hand washing, wash in moderately hot water as described above. DO NOT WRING OR TWIST.

3. Dry in tumble dryer at warm setting. Remove immediately at end of drying. Shape and hang.

4. To drip dry, remove from water before last spin cycle. Shape and hang.

5. If touching up is required, iron at a moderate heat setting.

DO NOT REMOVE THIS LABEL

3.6 Qualification. The smocks furnished under this specification shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids (see 4. and 6.).

3.7 End item appearance.

3.7.1 Appearance of cloth, seams and hems. The finished smock shall have the following ratings, when tested as specified in 4.6.

	Minimum average rating per sample unit after 5 washings
Cloth appearance	3.0
Seam appearance:	3.0
All seams, including fronts, sleeves, pocket and collar	
Hem appearance:	3.0
Sleeve, pocket and bottom hems	

3.8 Design. The smock shall be coat-length, with short sleeves; five-button; one-piece back, two-piece front, one patch pocket, and a notched lapel collar.

3.9 Figure. Figure 1 is furnished for information only, to the extent of any inconsistencies between the written specification and the figure, the specification shall govern.

3.10 Cloth.

3.11 Weave. The weave shall be a plain weave (poplin).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

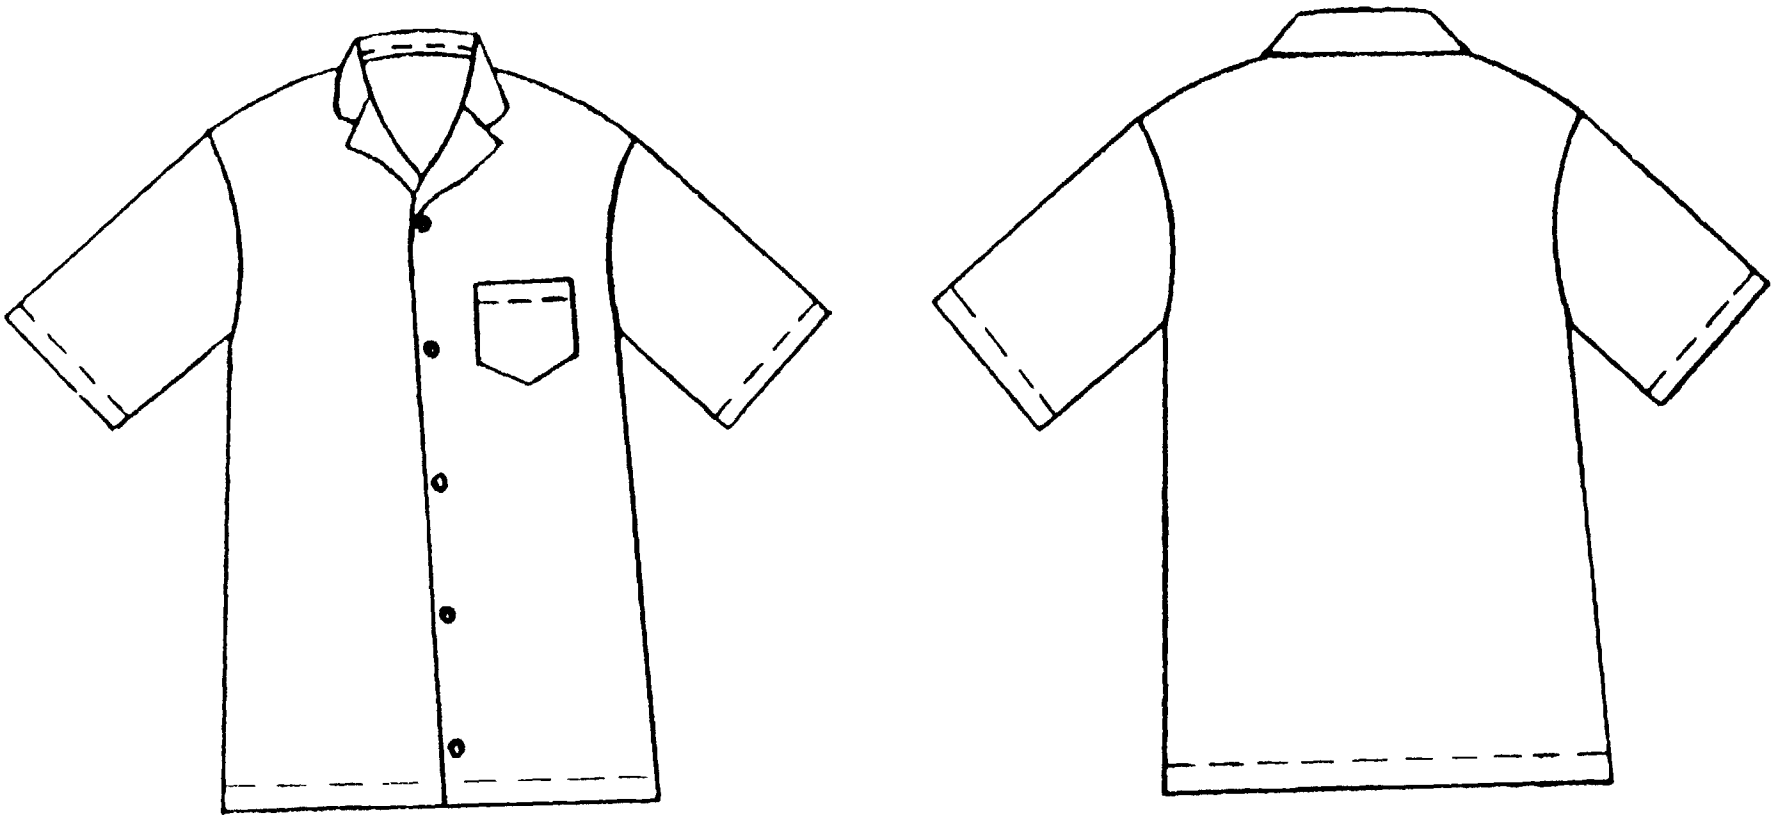


FIGURE 1. SMOCK, MEDICAL ASSISTANT'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

3.12 Color. The color shall be non-yellowing white. Whiteness may be supplemented by an optical brightener which fluoresces in the blue region.

3.13 Cloth preparation. The cloth shall be scoured, mercerized, bleached and stabilized. (This sequence is not mandatory.)

3.14 Nonfibrous materials. The starch and protein content including chloroform-soluble and water-soluble material of the finished and untreated cloth shall not exceed 2.0 percent when tested as specified in table V.

3.15 Cloth treatment. The finished cloth shall be given a pre-cured or post-cured type durable press treatment, consisting of a suitable catalyzed resin system and hand modifiers. A wetting agent may be used to facilitate processing. The cloth shall be processed so that the uncured and cured cloth shall meet the applicable requirements of this specification data sheet.

3.16 Physical requirements. The finished and cured cloth shall conform to the requirements listed in table I. Testing to be conducted after 15 laundering and drying cycles as specified in paragraph 4.6. Tests shall be as specified in table VI. If the cloth contains a post-cured type durable press treatment, the cloth shall be cured in the same manner as the smocks prior to 15 launderings.

TABLE I. Physical requirements.

Weight oz. sq. yd.	Yarns per inch minimum		Breaking strength pounds minimum	
Minimum	Warp	Filling	Warp	Filling
4.8	100	52	130	80

3.17 pH. The pH value of the water extract of the cured cloth shall be no less than 5.0 nor more than 9.0 when tested as specified in table VI.

3.18 Dimensional stability. The cured cloth shall not shrink more than 2.0 percent in the filling direction and 3.0 percent in the warp direction when tested as specified in table VI.

3.19 Thread. The thread for seaming, stitching, buttonholes and button sewing shall be cotton covered polyester thread, ticket Nos. 70, 2-ply and 50, 2-ply conforming to MIL-T-43548, or shall be spun polyester thread, ticket Nos. 70, 2- or 3-ply or 40, 3-ply and 50, 3-ply conforming to class 1 or 2 of MIL-T-43624. Where spun polyester thread is used, the 40, 3-ply and 50, 3-ply may be used in lieu of 50, 2-ply specified in table III; and the 70, 2 or 3-ply may be used in lieu of 70, 2-ply specified in table III. Colors shall be white.

3.20 Buttons. The buttons shall conform to type II, class K, style 25, 19 line of V-B-871. The color shall be white.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

3.21 Labels. Each smock shall have a combination size and identification label, and a laundry instruction label. The combination size and identification label shall conform to type I, classes 1 and 2 of DDD-L-20, except that the color of the finished label shall be dyed. In addition, the label shall contain the words "Durable Press" at the top of the label. If desired, the combination size and identification label may contain the laundry instruction information contained in 3.1.6.4. The laundry instructions shall be on the right side of the label (left side of the smock when worn) adjacent and separated from the size and identification information by a vertical line, approximately 1/16 inch thick. The color of the combination size, identification and laundry instructions label (one label instead of two) shall conform to 3.1.6.2.

3.22 Patterns. Standard patterns, which provide an allowance of 1/2 inch (3/8 for collar) for seams will be furnished by the Government to the supplier for cutting working patterns. The Government patterns, which show directional lines and markings for proper assembly, shall not be altered in any way and are to be used as a guide for cutting supplier's working patterns. The working patterns shall be identical to the Government patterns.

3.23 List of pattern parts. The components of the smock shall be cut from materials as specified and according to the number of parts listed in table II.

TABLE II. List of pattern parts.

Material	Nomenclature	Cut parts
Polyester/cotton poplin	Front	2
	Back	1
Cloth/durable press	Collar	1
	Pocket	1
	Sleeve	2

3.24 Construction.

3.25 Stitches, seams and stitching. Stitch, seam, and stitching types specified in table III shall conform to FED-STD-751. Where two or more methods of seams or stitch types are given for the same part of an operation, any one of them may be used. Seam allowances shall be maintained with seams properly sewn so that no raw edges, runoffs, twists, puckers or open seams will result. Thread tension shall be maintained so that there is no tight or loose tension.

3.26 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table III.

3.27 Thread breaks and ends of seams. The ends of all seams and stitching, produced with 301 stitch type, when not caught in other seams or stitching shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching (except labels) shall be overlapped not less than 1/2 inch. The ends of label stitching shall be overlapped not less than 3/8 inch stitches. Thread breaks, all stitch types, shall be secured by stitching back of the break not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

3.28 Buttonholes. Buttonholes shall be 5/8 + 1/8 inch straight-cut, purl, or whip type with the material securely caught in the stitching, and the ends tacked. Purling shall be on the outside of the smock when a purl type is used.

TABLE III. Manufacturing operations requirements.

No.	Manufacturing Operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or looper
1.	Cutting.					
	a. Cut the smock in strict accordance with patterns furnished, which show size, shape, placement of pockets, directional lines and notches for the proper assembling of all parts. Directional lines shall be placed in the warp direction.					
	b. Cut all parts from the same piece of material.					
	c. Facings shall contain a selvage edge. When selvageless cloth is used (i.e., cloth woven on shuttleless looms), the turned back edge of the facings shall be serged.					
2.	Replacement of damaged parts.	502 or 503	EFd-1	8-12	50-2	50-2
	a. Replace at time of cutting any part containing hole, or weakening defects, such as a smash, multiple float, slub.					
	b. Replace any parts damaged during the manufacturing process by needle chew, cut, tear, hole, burn or exposed drill hole. Unit containing one or more clearly visible mends will not be acceptable.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements. - Continued

No.	Manufacturing Operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or looper
	3. Marking (see 3.6.1).					
	a. Mark, ticket or bundle all parts to insure a uniform shade and proper assembly of smock, except those parts cut from ends.					
4.	Make pocket.					
	Finished appearance. The hem shall finish without twists, raw edges, pleats or puckers. The hem shall finish 1 ± 1/8 inch.					
	a. Hem pocket as indicated by pattern notches, with raw edge turned in.	301	EFb-1	8-12	50-2	50-2
5.	Sew on pocket.					
	Finished appearance. The pocket shall be uniform in appearance and shall lie flat and smooth, without twists, pleats, puckers or raw edges.					
	a. Position pocket as indicated by marks on pattern. Turn in raw edges and stitch to smock (1/16 to 1/8 inch gage). As an alternate for operation 5.b., continue the stitching across the top of the pocket for a distance of 3/16 to 1/4 inch and down to the stitching of the pocket hem diagonally or in a straight line. The finished width and depth of pocket shall be as follows.	301	LSd-1	8-12	50-2	50-2

Width inch	Depth inch	Tolerance inch
4-3/4	5-1/2	± 1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements. - Continued

No.	Manufacturing Operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or looper
	b. Bartack ends of pocket openings with 1/2 + 1/8 inch vertical bartacks.	Bartack		28 per bartack	50-2	50-2
6.	Make one-piece convertible collar.					
	With face of collar to the inside, seam 2 ends of collar, trim, turn and force out edges and points.	301	SSa-1	8-12	50-2	50-2
7.	Join shoulder seam.					
	With the front and back, face to face, join the shoulder seams.	512 515, 516, 517 or 519	SSa-2 SSa-2	8-12 8-12	50-2 50-2 (chain) 70-2 (all overedge stitching threads)	50-2 70-2
8.	Set collar and attach combination size and identification label.					
	Finished appearance. The collar shall finish without pleats, twists or puckers.					
	a. Form facings according to pattern notches, with facings and fronts face to face. Position collar between fronts and facings according to pattern notches. Stitch from lapel point to collar setting notch. Continue stitching to a point 2 to 2-1/4 inches from ends of facing. Notch seam allowances and continue stitching undercollar to neck of smock.	301	SSa-1 BSq-2(a) BSq-2(b)	8-12	50-2	50-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements. - Continued

No.	Manufacturing Operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or looper
	b. With the overedge shoulder seam facing the back of smock, turn in bottom edge of top collar and seam to neck of smock, 1/16 to 1/8 inch from edge, catching top ends of facings and combination label in seaming. Combination label shall be centered at back of smock. Tolerance of 1/4 inch off-center is permitted. Stitch remaining three sides of label.	301	BSg-2(a) BSg-2(b)	8-12	50-2	50-2
		301	LSbi-1	8-12	50-2	50-2
9.	Make and set sleeves.					
	Finished appearance. The seams shall start and finish evenly. The sleeve hems shall be 1 + 1/4 inch wide, uniform in width and without gathers, pleats, twists or puckers.					
	a. Turn up bottom of sleeve with the raw edges turned in and stitch 1/16 to 1/8 inch from the edge.	301	EFb-1	8-12	50-2	50-2
	b. Set sleeves matching notches and seam. The overedge shoulder seams shall face the back of the smock.	512 515, 516, 517 or 519	SSa-2 SSa-2	8-12 8-12	50-2 50-2 (chain) 70-2 (all overedge stitching threads)	50-2 70-2
10.	Join side and underarm seams.					
	a. Join side and underarm seams. The ends of the seams at bottom of sleeve and bottom of smock shall be even.	512 515, 516, 517 or 519	SSa-2 SSa-2	8-12 8-12	50-2 50-2 (chain) 70-2 (all overedge stitching threads)	50-2 70-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements. - Continued

No.	Manufacturing Operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or looper
	b. Tack across the seam allowance (inside) at bottom of sleeve hem with a 1/2 ± 1/8 bartack or automatic straight tack.	Bartack or 301		28 per bartack 28 per tack	50-2 50-2	50-2 50-2
11.	Make buttonholes.					
	Mark or gage and make 5 vertical straight cut buttonholes on left front of smock, through the facing as indicated by marks on pattern, 3/4 ± 1/8 inch from edge.	Buttonhole		44-52 per buttonhole including tack	50-2	50-2
12.	Hem bottom of smock.					
	Finished appearance. The hem shall be uniform in width and shall finish 1/2 ± 1/8 inch, wide, without gathers, twists, pleats or puckers.					
	a. Fold facing in accordance with pattern notches, turn up bottom of smock with raw edge turned in a single stitch 1/16 to 1/8 inch from edge, with side seams towards the back of smock.	301				
13.	Mark for buttons.					
	Mark smock for buttons in locations to correspond with buttonholes and marks on patterns.					
14.	Sew on buttons.					
	Buttons shall be securely sewn properly aligned with corresponding buttonholes to effect a smooth closure.	301 or 101				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE III. Manufacturing operations requirements. - Continued

No.	Manufacturing Operations requirements	Stitch type	Seam and stitching type	Stitches per inch	Thread Needle	Thread Bobbin or looper
15.	Attach instruction label.					
	Position instruction label on inner side of left front of smock, corresponding to the left pocket. Stitch on all 4 sides. Stitching shall not be visible on the outside.	301	LSbj-1	8-12	50-2	50-2
16.	Clean smock.					
	a. Trim all thread ends and remove loose threads.					
	b. Remove all spots, stains, and visible shade markings.					
17.	Pressing.					
	a. Hot head press complete smock. If desired, the individual cut parts may be hot head pressed.					
	b. The hot head press used shall be capable of controlling the temperature, pressure and dwell time. The temperature, pressure and dwell time shall be adequate to obtain the desired results. It is suggested that the supplier of the cloth be contacted for information concerning the aforementioned for the optimum conditions.					
	c. Button and neatly fold each smock.					
18.	Curing (Post Cured Only).					
	The pressed smock shall be suspended on a hanger, with all the buttons fastened, and shall be subjected to dry oven heat. The temperature and curing time shall be adequate to obtain the required results.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

3.29 Manufacturing operation requirements. The smock shall be manufactured in accordance with operation requirements in table III. The supplier is not required to follow the exact sequence of operations. Any additional basting or holding stitching used to facilitate manufacture is permissible provided the thread is removed or does not show on the finished smock.

3.30 Marking. The parts of the smock shall be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

a. Metal fastening devices.
b. Sew-on type markings.
c. Adhesive type markings which leave an impression of traces of paper or adhesive on the material upon removal of the marking.

3.31 The finished smocks shall conform to the measurements shown in table IV.

TABLE IV. Measurements in inches.

	Small	Medium	Large	X-Large	Tolerance
1/2 Chest 1/	21	23	25	27	± 1/2
Sleeve seam 2/	6-1/4	6-1/4	6-1/4	6-1/4	∓ 1/2
Back length 3/	30	30-1/2	31	31-1/2	∓ 1

1/ With the smock buttoned, measure across the chest, at base of armhole, from folded edge to folded edge.

2/ Measure sleeve seam along underarm from sleeve setting seam to end of sleeve.

3/ Measure back length down center of back from collar joining seam to a point in line with bottom of smock.

3.32 Workmanship. The finished smock shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

4.1.1 Records. Records of examinations and tests performed by or for the contractor shall be maintained by the contractor and made available to the Government, upon the Government's request, at any time, or from time to time, during the performance of the contract and for a period of three years after delivery of the supplies to which such records relate.

4.1.2 Inspection. Inspection, as used in this specification, is defined as both examination (such as visual and auditory investigation without the use of special laboratory appliances or procedures) and testing (determination by technical means of physical and chemical properties) of the item.

4.1.3 Certificates of quality. Certificates of quality, supplied by the manufacturer of the materials may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the Government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the National Stock Number (NSN), the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements. The Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.3 Component and material testing. In accordance with 4.1 above, components shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification data sheet or applicable purchase document. In addition, testing shall be performed on components listed in table V for characteristics noted. Whenever applicable, tests shall be conducted in accordance with methods prescribed in FED. TEST METHOD STD. NO. 191 and as listed in tables V and VI. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final results.

4.3.1 Sampling for testing. Unless otherwise specified in a subsidiary specification, the sampling for testing shall be as specified below:

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 or 22,000 inclusive	3
22,001 and over	5

The lot shall be unacceptable if one or more units fail to meet any test requirement specified. The sample unit shall be 4 continuous yards full width of the cured and finished cloth and 1/2 yard full width of the untreated cloth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE V. Test methods - applicable to untreated cloth.

Characteristic	Requirement paragraph	Test method
Polyester identification	3.1.1.1	1/
Cotton identification	3.1.1.2	1/
Cotton - combed	3.1.1.2	1/
Fiber content		
Polyester-percent	3.1.2	4.4 1/
Weave	3.1.3.1	Visual 1/
Nonfibrous materials	3.1.3.4	2611 1/

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

TABLE VI. Test methods - applicable to treated and cured cloth.

Characteristic	Requirement paragraph	Number of launderings	Test method
Yarns per inch			
Warp	3.1.3.6	15	5050
Filling	3.1.3.6	15	5050
Breaking strength			
Warp	3.1.3.6	15	5100
Filling	3.1.3.6	15	5100
Dimensional stability			
Warp	3.1.3.6.2	15	4.6
Filling	3.1.3.6.2	15	4.6
Weight	3.1.3.6	15	5041
pH	3.1.3.6.1	0	2811

4.4 Polyester fiber content.

4 4.1 Test specimen. The specimen shall be approximately 2 grams made up of yarns ravelled from the cloth sample and cut into approximately 1/4 inch lengths.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

4.4.2 Apparatus, reagents, method cited.

Apparatus as described in Method 2611.
Sintered glass filter crucible of coarse porosity.
Hydrometer.
Sulfuric acid, 74 percent (density 1.67) prepared by pouring 350 cubic centimeters (cc.) of water in a round-bottom flask, then adding 680 cc. of concentrated sulfuric acid slowly, with cooling under the tap. The density of the solution is adjusted to 1.67 using a hydrometer.
Sulfuric acid, dilute (100 cc. of concentrated sulfuric acid added to 1900 cc. of water).

4.4.3 Procedure. The nonfibrous material shall be removed as specified in Method 2611. The desized specimen shall be dried to a constant weight, cooled in a desiccator and weighed. The specimen shall then be immersed in a 200 cc. of 75 percent solution of sulfuric acid for 1 hour with intermittent stirring. The residual fibers shall be transferred to the glass crucible and the excess acid solution removed by suction. The residual fibers shall be washed on the fiber filter successively with dilute sulfuric acid, water, dilute ammonia solution (soak for ten minutes) and again with water (soak for ten minutes). After each separate washing, the crucible is drained by suction. The residue shall be dried to a constant weight in the air oven at 105° to 110°C. This is the "weight of the dry polyester fiber" in the specimen.

4.4.4 Result. The percentage of polyester fiber shall be based on the following equation:

$$\text{Polyester fiber, percent} = \frac{\text{Weight of dry polyester fiber} \times 100}{\text{Weight of dry desized specimen}}$$

4.4.5 Two specimens shall be tested for each sample unit and the polyester fiber content shall be the average of the results obtained from the specimen tested and shall be reported to the nearest 1.0 percent.

4.5 End item inspection. Smocks shall be tested as specified in table VII. All test reports shall contain the individual values utilized in expressing the final results. All requirements shall be applicable to the sample unit. The sample size shall be as specified in 4.3.1.1 and the sample unit shall be one finished smock. One smock shall be used to evaluate all appearance requirements. The lot shall be unacceptable if one or more of the units fail to meet any of the requirements specified.

TABLE VII. End item testing after 5 launderings.

Characteristic	Requirement paragraph	Test method
Fabric appearance rating	3.2.1	4.6
Seam and hem appearance rating	3.2.1	4.6

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

4.5.1 Examination of the end item. The end item shall be examined for defects listed in 4.5.1.1 through 4.5.1.3. Classification of defects shall be in accordance with the list shown.

4.5.1.1 General defects.

TABLE VIII. Classification of general defects.

Defects	Classification		
	Major	Minor	
		A	B
Pressing.			
a. Burned or scorched.	X		
b. Omitted.		X	
c. Poorly pressed.			X
Material defects and damage.			
a. Hole, cut, tear or needle chew:			
1. On outside:			
- any.	X		
2. On inside:			
- up to 1/8 inch (inclusive).			X
- more than 1/8 inch.		X	
b. Mend, darn or patch:			
1. On outside:			
- any.	X		
2. On inside:			
- 1/8 inch up to 1/2 inch (inclusive).			X
- more than 1/2 inch.		X	
c. Weakening defects:			
1. Smash.	X		
2. Multiple float or loose slub:			
- on outside.	X		
- on inside.		X	
d. Permanent crease in cloth.	X		
e. Slub or shade bar.			
- on outside.	X		
- on inside.		X	
Shaded parts.			
Outside part shaded.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE VIII. Classification of defects. - Continued

Defects	Classification		
	Major	Minor	
		A	B
Cleanness.			
a. Spot or stain:			
- on outside.	X		
- on inside.		X	
b. One or more shade tickets not removed.			X
c. Any shade marking visible on outside.	X		
d. Thread ends not trimmed, or loose threads not removed.			X
e. Visible basting thread not removed.			X
Component and assembly.			
Any component part or required operation omitted (unless otherwise classified herein).	X		
Cutting.			
Any component part not cut in conformance with directional lines indicated on patterns or in accordance with specification requirements.	X		
Seams and stitching.			
a. Accuracy of seaming:			
1. Seam or component part twisted, puckered or pleated (unless otherwise classified herein).	X		
2. Part of material caught in unrelated operation or stitching:			
- up to 1/4 inch of stitching (inclusive).		X	
- more than 1/4 inch of stitching.	X		
3. Ends of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch.		X	
4. Thread breaks secured by stitching back of break less than 1/2 inch.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE VIII. Classification of defects. - Continued

Defects	Classification		
	Major	Minor A	Minor B
5. Ends of a continuous line of stitching overlapped less than 1/2 inch or less than 3 stitches on labels.			X
6. Overedged seams not facing specified direction.			X
b. Gage of stitching:			
1. Irregular, i.e., unevenly gaged or corresponding stitching not uniformly gaged (to be scored only when condition exists along major portion of seam).		X	
2. Not within range of gage specified or varies more than 1/16 inch when no range is specified.			X
c. Stitches broken or missing (except buttonholes):			
- up to 1/4 inch (inclusive).			X
- more than 1/4 inch but not more than 1/2 inch.		X	
- more than 1/2 inch.	X		
d. Skipped stitches:			
- 1/4 inch to 1/2 inch long (inclusive).		X	
- more than 1/2 inch long.	X		
e. Runoffs			
- 1/4 inch to 1/2 inch long (inclusive).			X
- more than 1/2 inch long.		X	
f. Raw edges			
- more than 1/4 inch long.			X
g. Seam and stitch type:			
- seam type or stitch type not as specified.	X		
h. Stitches per inch (score defect when occurring on the major portion of seam):			
- more than maximum specified.			X
- less than minimum specified.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE VIII. Classification of defects. - Continued

Defects	Classification		
	Major	Minor	
		A	B
i. Stitch tension (except bartacks):			
1. Loose tension resulting in a loose seam.	X		
2. Loose tension resulting in loosely exposed bobbin or top thread.			X
3. Tight tension (stitching breaks when strain is applied in the direction of the seam of stitching).		X	
Bartacks.			
a. Less than 3/8 or more than 5/8 inch long.			X
b. Loose tension on one or more.			X
Buttonholes.			
a. One or more omitted or added.	X		
b. Stitching on one or more buttonholes not caught in fabric, causing stitching to pull away from fabric.	X		
c. Ends not securely tacked.			
- one buttonhole.			X
- two or more buttonholes	X		
d. One or more broken or more than two skipped stitches in one or more buttonholes.			
e. Buttonhole(s) less than 1/2 or more than 3/4 inch.			X
f. Ragged edges.			X
g. Uncut or not specified type.		X	
Buttons.			
a. Missing, loose or broken:			
- one button.		X	
- two or more buttons.	X		
b. Not specified type, size, color.		X	
c. Improperly positioned, so that it does not button properly (causes puckering and pulling).		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

4.5.1.2 Detailed defects applicable to specified parts.

TABLE IX. Classification of detailed defects.

Defects	Classification		
	Major	Minor	
		A	B
Labels.			
a. Combination size and identification:			
1. Missing, incorrect, illegible, or misplaced.		X	
2. Not securely caught in collar joining seam.			X
3. Not stitched on 3 sides.			X
4. Not positioned at center of neck.			X
b. Laundry instruction:			
1. Missing, incorrect, illegible, or misplaced.		X	
2. Not stitched on all 4 sides.			X
3. Not positioned as specified.			X
Collar.			
a. Collar twisted, puckered, full or tight, causing edges to curl.		X	
b. Off center by more than 1/2 inch.		X	
c. Points poorly shaped or not uniformly shaped.		X	
d. Points uneven in length by more than 1/4 inch.		X	
e. Edge not forced out.			X
Lapels.			
a. Poorly shaped or not uniformly shaped.		X	
b. Twisted or ends curled.		X	
c. Corner(s) or edge(s) not forced out.			X
d. Lapel steps uneven in length by more than 3/8 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

TABLE IX. Classification of detailed defects. - Continued

Defects	Classification		
	Major	Minor A	Minor B
Fronts.			
a. Right and left front uneven in length when smock is buttoned:			
- 3/8 inch to 3/4 inch (inclusive).			X
- more than 3/4 inch (inclusive).		X	
b. Front edge(s) stretched, irregular, curved out at bottom corner or not evenly forced out.		X	
c. Bottom corner(s) not forced out.			X
d. Excessive fullness or twist on front(s) below lapel.			X
e. Button(s) and buttonhole(s) not aligned causing noticeable bulge or twist.		X	
f. Top of front facing(s) not caught in collar seams.		X	
Pocket.			
a. Poorly shaped, not of uniform shape or attached crookedly.	X		
b. Side of pocket not parallel with front edge of smock by:			
- 1/4 inch up to 3/8 inch inclusive.		X	
- more than 3/8 inch.	X		
Bottom hem.			
a. Bottom hem less than 3/8 or more than 5/8 inch wide.			X
b. Bottom hem twisted.		X	
c. Bottom hem not uniform in width by more than 1/4 inch.			X
Sleeves.			
a. End of underarm seam(s) not even by more than 1/8 inch.			X
b. Sleeve hem(s) twisted.		X	
c. Sleeve hem less than 3/4 or more than 1-1/4 inches wide.			X
d. Sleeve hems not uniform in width by more than 1/4 inch.			X
e. Bartack, or tack, omitted at end of underarm seam(s).	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

4.5.1.3 Size measurements. Any measurements deviating from dimensions and tolerances specified in table IV shall be scored as a size measurement defect. Sleeve inseams uneven in length by more than 1/2 inch shall be scored as a size measurement defect.

4.5.1.4 Inspection levels and acceptable quality levels. Inspection levels and acceptable quality levels (AQL) expressed in defects per 100 units (DHU) shall be as follows:

	AQL	Inspection levels
For 4.5.1.1 and 4.5.1.2 (combined)		II
Major	2.5	
Major and Minor A (combined)	15.0	
Total (Major, Minor A and Minor B combined)	25.0	
For 4.5.1.3		
One class	4.0	S-3

4.5.2 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with the packaging, packing, and marking requirements of section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level shall be 2.5 defects per hundred units.

Examine	Defects
Markings, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling, open and non-continuous heat sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag.
	Bulged or distorted container.
Content	Number per container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

4.6 Test methods.

4.6.1 Appearance of cloth, seam appearance, and the determination of dimensional stability.

4.6.1.1 Apparatus and material. The following apparatus and materials are required for laundering:

a. Kenmore Automatic Washing Machine Model 600 or similar machine. In case of disputes, the Kenmore Model 600 shall be used.
b. Kenmore Automatic Dryer Model 600 or equivalent.
c. AATCC standard detergent or equivalent.
d. Dummy pieces for ballast - 36 x 36 inches hemmed of type 128 cotton sheeting added to test specimens to make a 4-pound load.

4.6.1.2 The following apparatus and materials are required for evaluation of samples:

a. Overhead lighting procedure. Apparatus shall be as specified in AATCC Test Method 124-1969. In addition, AATCC three dimensional Durable Press Replicas, and a non-reflecting black topped table 35 ± 1 inches high shall also be required. The dimensions of the table shall be at least 30 x 24 inches with the long dimensional parallel to the viewing board.

b. Overhead and side lighting. Apparatus shall be as specified in AATCC Test Method 88C-1971.

4.6.1.3 Evaluation shall be conducted in a room where the only source of light will be that used for observation. To prevent unwanted reflection of light that will interfere with the observation, the walls of the room may be painted a flat non-reflecting black or blackout curtains may be hung on each side of the viewing area.

4.6.1.4 Test for characteristics involving laundering. Three specimens 22 x 22 inches measured parallel to the warp and filling shall be cut from a portion of the treated cloth sample which has been pressed and cured flat. One specimen shall be cut from each side of the sample unit to within three inches of the selvages and the third specimen shall be taken from the center. No two specimens shall contain the same filling yarns. The specimens shall be conditioned to equilibrium under standard conditions in accordance with FED. TEST METHOD STD NO. 191. The conditioned specimens shall be laid without tension on a flat surface, care being taken that the cloth is free from wrinkles or creases. Mark three distances, each a minimum of 6 inches from each other and not closer than one inch to the edges of the specimen. The distance may be marked with indelible ink and a fine pointed pen, or by sewing fine threads into the cloth, or by stamping. The measured distance shall be parallel to the respective yarns. Sufficient additional test specimens shall be cut to perform tests for weight, texture and breaking strength.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

4.6.2.1 Laundering. Place the additional test specimens and the 22-inch by 22-inch specimens in the washer. The washing load shall be approximately four pounds. Dummy pieces shall be added to the machine, along with the test specimens to make up a four pound load. Fill to the full water level of the washer with water of a hardness not to exceed 50 parts per million and at a temperature of 140^{0} + 5^{0}F. Add 140 grams of detergent. Set the washer for a 12 minute cycle on the "permanent press" setting. Allow the washing to proceed automatically through the final spin cycle. Remove the specimens immediately at the completion of the final spin and separate from the dummy pieces and each other if tangled. Place the complete washed load (4 pounds) in the dryer and dry at the "Permanent Press" cycle at a setting which generates an exhaust temperature range of 140^{0} to 160^{0}F. Operate the dryer until the load is dry and continue tumbling 5 minutes with the heat turned off (cool down cycle). Remove the load immediately after the machine stops. The load shall then be continued for 15 complete cycles.

4.6.3 Appearance of smock seams, hems, and smock cloth. One finished smock shall be used.

4.6.3.1 Laundering. The required 5 launderings shall be performed as specified in 4.6.2 and 4.6.2.1. These launderings may be combined with those of the cloth specimens in 4.6.2.1. During conditioning and interruption of wash and dry cycles, the smock shall be placed on a hanger with all buttons fastened. When the last (5th) cycle is completed the smocks shall be conditioned 2 hours at 70^{0} $\pm$ 2^{0}F. and 65^{0} $\pm$ 2% relative humidity prior to evaluation.

4.6.4 Evaluation. Three trained observers shall evaluate each sample unit for cloth appearance and seam appearance. The observers shall make their evaluations independent of each other. Each observer shall evaluate each specimen for appearance as it hangs on the viewing board while standing in front of the viewing board and four feet away from it. The pocket, sleeve and bottom hems shall be averaged and reported separately from the seams for each smock tested.

4.6.4.1 Weight, texture and breaking strength. Perform tests for weight, texture and breaking strength specified in table VI.

4.6.4.2 Dimensional stability. The laundered and conditioned specimens to be evaluated for dimensional stability shall be laid out without tension on a flat surface in the standard atmosphere, care shall be taken that the specimens are free from wrinkles and creases. The previously measured distances marked on the specimen shall again be measured in both the warp and filling directions. The dimensional stability of the specimen shall be calculated as follows:

$$\text{Dimensional change, percent} = \frac{A - B \times 100}{A}$$

Where: A = Average of initial measurements (3 specimens)
B = Average measurements after laundering (3 specimens)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

The dimensional change of the sample unit in the warp and filling directions shall be the average of the specimens tested in each direction respectively and shall be reported separately to the nearest 0.1 percent. The individual values used to calculate the averages shall also be reported.

4.7 Packaging inspection. The inspection of the unit, package, packing and marking for shipment and storage shall be in accordance with quality assurance provisions of the applicable container specification and the marking requirements of MIL-STD-129.

4.8 Evaluation of the appearance of the cloth in the smock. The overhead lighting shall be used (see 4.6.1.2). Mount the test specimen on the viewing board with the center of the specimen five feet from the floor. Place three dimensional plastic replicas on each side of the specimen with the centers five feet from the floor, to facilitate comparative rating. The specimen shall be rated according to the appearance of the plastic replica that most nearly matches the appearance of the cloth. The average of the rating values assigned for appearance of the cloth by each observer rounded off to the nearest 0.5 rating shall be the rating for the specimen. Each rating value given by each observer for appearance of the cloth shall also be reported.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Unit of issue. Unit of issue shall be each (EA). One smock, as specified, constitutes one unit.

5.1.2 Level A. Each smock shall be neatly folded to an aproximately 14 by 12 inches. Each folded smock shall be inserted in a snug fitting, flat style, clear, heat sealed or a flap closure polyethylene bag having a minimum thickness of 0.00125 inches. Heat sealed bags shall have a 1/4 inch diameter hole made at one corner of the bag to allow excess air to escape.

5.1.3 Level C. Each smock shall be packaged in a manner to afford adequate protection against physical damage during shipment and storage.

5.2 Packing. Packing shall be level A, B or C, as specified (see 6.2).

5.2.1 Level A. Forty-eight smocks of one size only shall be packed in a snug fitting shipping container conforming to PPP-B-636, class weather-resistant. Closure, strapping and water-proofing shall be as specified in the box specification.

5.2.2 Level B. Forty-eight smocks of one size only shall be packed in a snug fitting box conforming to PPP-B-636, class domestic. Closure shall be as specified in the box specification.

5.2.3 Level C. Forty-eight smocks of one size only shall be packed in an exterior container that will afford adequate protection against damage or during shipment from the supply source to the receiving activity. These packs shall conform to the applicable carrier's rules and regulations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Unit package. Each unit package shall be marked as specified in MIL-STD-129. Markings may be printed on the bag or on a label inserted in the bag in a manner to permit ready identification.

5.3.2 Shipping container. Each shipping container shall be marked as specified in MIL-STD-129.

5.3.3 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The smock is for wear by medical assistants in a clinical environment.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number and date of this specification data sheet.
b. Size required (see 1.2).
c. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Items of consideration for producing flat seams. In order to avoid puckering and to produce the flattest seams possible, consideration must be given to the following:

The needle should be the smallest possible with a slim point. The smallest throat plate hole possible should be used to prevent flagging. Presser foot pressure should be just enough to insure a steady flow of material. Feed dogs should contain 18 to 20 teeth per inch for normal sewing and 20 to 25 per inch for stitching down. All attachments should be as smooth as possible to permit free flowing of the fabric through the machine. The lightest possible thread tensions should be used while maintaining a good stitch. The upper and lower threads must be balanced. Frequent checks should be made to insure that blunt needles are eliminated and machine adjustments maintained.

6.4 Recommended apparatus for tests. The recommended apparatus for test in 4.6.1.1 are:

a. Kenmore Automatic Washing Machine Model 600 or similar machine for the washer. In case of dispute, Kenmore Model 600 should be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

b. Kenmore Automatic Dryer Model 600 or equivalent.

TABLE X. Examination for defects in packaging, and packing and marking.

Examine	Defects	Inspection level	AQL percent defective per 100 units
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.	S-2	2.5
Materials	Any components missing, damaged or not specified.	S-2	2.5
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling.	S-2	2.5
	Bulged or distorted container.	S-2	2.5
	Open and noncontinuous heat sealed seams and closure of polyethylene bag. Omission of vent hole in polyethylene bag.		
Content	Number of smocks per package and per shipping container is more or less than required.	S-2	2.5
	Size shown on one or more smocks not as specified in container. 1/		

1/ For this defect, one package from each container in the sample shall be examined.

6.5 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E380 Standard for Metric Practice, and are for information only. In each instance, the value stated in U. S. customary units shall be controlling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

6.6 This specification covers the following items appearing in the Federal Supply Catalog:

National Stock No.	Item Classification
6532-00-117-7546	SMOCK, MEDICAL ASSISTANT'S, Man's, White, Cotton-Polyester, Size Small
6532-00-117-7543	SMOCK, MEDICAL ASSISTANT'S, Man's, White, Cotton-Polyester, Size Medium
6532-00-117-7542	SMOCK, MEDICAL ASSISTANT'S, Man's, White, Cotton-Polyester, Size Large
6532-00-117-7487	SMOCK, MEDICAL ASSISTANT'S, Man's, White, Cotton-Polyester, Size Extra Large

Custodians:
Army-MD
Navy-MS
Air Force-03

Preparing Activity:
DLA-DM

Project No. 6532-1152

☆U S GOVERNMENT PRINTING OFFICE 1984—705-040/A1566

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4966 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Personnel Support Center
ATTN: DPSC-ATTS
Philadelphia, PA 19101

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street City State ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T11:40Z
Check the source to verify that this is the current version before use.