
MILITARY SPECIFICATION SHEET

SOCKETS, PLUG-IN ELECTRONIC COMPONENTS
(FOR 32 PIN, DUAL-IN-LINE PACKAGES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the sockets described herein shall consist of this specification and the latest issue of MIL-S-83734.

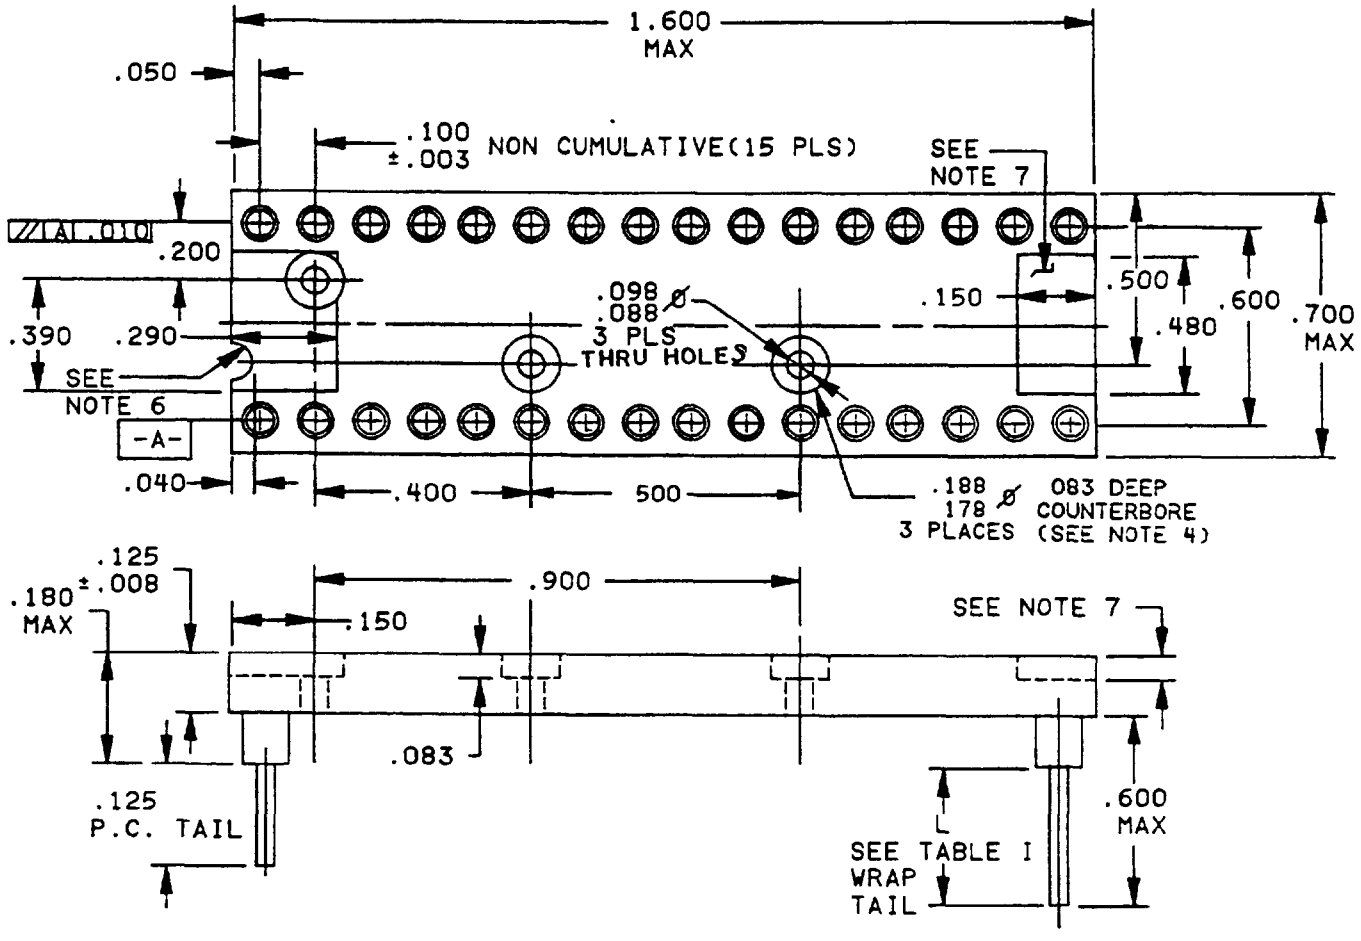

CONFIGRATION 3 (SOLID BODY WITH MOUNTING HOLES)

FIGURE 1. Socket dual-in-line.

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.003	0.08	.180	4.57
.008	0.20	.188	4.78
.010	0.25	.200	5.08
.040	1.02	.290	7.37
.050	1.27	.390	9.91
.083	2.11	.400	10.16
.088	2.24	.480	12.10
.098	2.48	.500	12.70
.100	2.54	.600	15.24
.125	3.18	.700	17.78
.150	3.81	.900	22.86
.178	4.52	1.600	40.64
		2.300	58.42

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± 005 (0 13 mm).
4. Holes to be provided for mounting A recess to be provided to fully enclose the head or nut of the fastener below the surface of the sockets.
5 Devices shall accept flat leads 008 (0 20 mm) to .015 (0.38 mm) thick by 015 (0.38 mm) to 021 (0 53 mm) wide. The values for mating forces are based upon the use of standard leads 011 ±.002 (0.28 ±0 05 mm) thick by .018 ±.002 (0 46 ±0.05 mm) wide. The length of the lead accepted by the device shall be .150 (3.81 mm) long for the low profile sockets. Contact shall be made at or before reaching a depth of 100 (2.54 mm) in the low profile sockets
6 A visual polarization index shall be provided in the first quadrant. If the visual index overlaps into the fourth quadrant, it shall be adjacent to or clockwise from contact number one
7 It is desirable that the socket face shall be relieved to facilitate removal of the integrated circuit

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1 and table I.

Material and contact finish: In accordance with MIL-S-83734.

Terminations. Solderless wrap, type I and printed circuit terminal, type II (see table I, figure 1, and MIL-S-83734).

Contact identification: See figure 1 and note 6.

Part number M83734/17- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and characteristics. 1/

Dash number M83734/17	Type	Length L Min	Contact engagement area finish	Termination area	Number of wrap levels
-001	I	.185	Gold	Gold	1
-002	"	.185	Gold	Tin/Lead	"
-003	"	.185	Tin/Lead	Tin/Lead	"
-004	"	.320	Gold	Gold	2
-005	"	.320	Gold	Tin/Lead	"
-006	"	.320	Tin/Lead	Tin/Lead	"
-007	"	.485	Gold	Gold	3
-008	"	.485	Gold	Tin/Lead	"
-009	"	.485	Tin/Lead	Tin/Lead	"
-013	II	---	Gold	Gold	N/A
-014	"	---	Gold	Tin/Lead	"
-015	"	---	Tin/Lead	Tin/Lead	"

1/ For replacement purposes, the Government will stock, store, and issue -001, -004, -007, and -013 parts only. (See 6.5 of MIL-S-83734)

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities.
Navy - AS, OS, SH
Air Force - 11, 99
DLA - ES

User activities:
Navy - MC
Air Force - 19

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-3501)

☆ U.S. GOVERNMENT PRINTING OFFICE 1988 — 548-036/40036

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:37Z
Check the source to verify that this is the current version before use.